

Product datasheet

Specifications



Harmony. Modular timing relay. 8 A. 2 CO. 0.1 s...100 h. multifunction. 12 V AC/DC

RE22R2MJU

Price: 1,956.69 ZAR

Main

Range Of Product	Harmony Timer Relays
Product Or Component Type	Modular timing relay
Discrete Output Type	Relay
Device Short Name	RE22
Nominal Output Current	8 A

Complementary

Contacts Type And Composition	1 C/O timed contact 1 C/O timed or instantaneous contact
Time Delay Type	Power on-delay On-delay and off-delay Interval Off-delay Symmetrical flashing
Time Delay Range	1...10 min 6...60 min 0.1...1 s 6...60 s 1...10 s 1...10 h 10...100 h
Control Type	Rotary knob front panel
[Us] Rated Supply Voltage	12 V AC/DC
Voltage Range	0.9...1.2 Us
Supply Frequency	50...60 Hz +/- 5 %
Connections - Terminals	Screw terminals, 2 x 1.5 mm² with cable end Screw terminals, 2 x 2.5 mm² without cable end
Tightening Torque	0.6...1 N.m conforming to IEC 60947-1
Housing Material	Self-extinguishing
Repeat Accuracy	+/- 0.5 % conforming to IEC 61812-1
Temperature Drift	+/- 0.05 %/°C
Voltage Drift	+/- 0.2 %/V
Setting Accuracy Of Time Delay	+/- 10 % of full scale at 25 °C conforming to IEC 61812-1
Control Signal Pulse Width	30 ms 100 ms under load
Insulation Resistance	100 MOhm at 500 V DC conforming to IEC 60664-1
Recovery Time	120 ms on de-energisation
Immunity To Microbreaks	10 ms

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Power Consumption In Va	1.2 VA at 12 V AC
Power Consumption In W	0.5 W at 12 V DC
Breaking Capacity	2000 VA
Minimum Switching Current	10 mA at 5 V
Maximum Switching Current	8 mA
Maximum Switching Voltage	250 V
Electrical Durability	100000 cycles for resistive load, 8 A at 250 V, AC
Mechanical Durability	10000000 cycles
Rated Impulse Withstand Voltage	5 kV for 1.2...50 µs conforming to IEC 60664-1 5 kV conforming to IEC 61812-1
Power On Delay	100 ms
Safety Reliability Data	B10d = 190000 MTTFd = 205.4 years
Mounting Position	Any position in relation to normal vertical mounting plane
Mounting Support	35 mm DIN rail conforming to IEC 60715
Status Led	LED green (flashing) for timing in progress LED green (steady) for power ON LED yellow for relay energised
Function Available	A- Power on-delay relay-2 C/O Ac- On-delay and off-delay relay w/ control signal-2 C/O At- Power on-delay relay w/ pause/summation (Y1)-2 C/O B- Single interval relay w/ control signal-2 C/O Bw- Double interval relay w/ control signal-2 C/O C- Off-delay relay w/ control signal-2 C/O D- Symmetrical flashing relay (starting pulse-off)-2 C/O Di- Symmetrical flashing relay (starting pulse-on)-2 C/O H- Interval relay-2 C/O Ht- Interval relay w/ pause/summation (Y1)-2 C/O
Width	22.5 mm
Net Weight	0.09 kg
Control Type	With test button
Number Of Functions	10

Environment

Dielectric Strength	2.5 kV for 1 mA/1 minute at 50 Hz conforming to IEC 61812-1
Standards	IEC 61000-6-1 IEC 61812-1 IEC 61000-6-4 IEC 61000-6-3 IEC 61000-6-2
Directives	2006/95/EC - low voltage directive 2004/108/EC - electromagnetic compatibility
Product Certifications	CSA cULus CE EAC GL CCC RCM
Ambient Air Temperature For Operation	-20...60 °C
Ambient Air Temperature For Storage	-30...60 °C

Ip Degree Of Protection	IP40 housing: conforming to IEC 60529 IP20 terminal block: conforming to IEC 60529 IP40 front face: conforming to IEC 60529
Vibration Resistance	20 m/s² (f= 10...150 Hz) conforming to IEC 60068-2-6
Shock Resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Relative Humidity	93 %, without condensation conforming to IEC 60068-2-30
Electromagnetic Compatibility	Electrostatic discharge immunity test - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2 Electrostatic discharge immunity test - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2 Fast transients immunity test - test level: 1 kV level 3 (capacitive connecting clip) conforming to IEC 61000-4-4 Fast transients immunity test - test level: 2 kV level 3 (direct contact) conforming to IEC 61000-4-4 Surge immunity test - test level: 1 kV level 3 (differential mode) conforming to IEC 61000-4-5 Surge immunity test - test level: 2 kV level 3 (common mode) conforming to IEC 61000-4-5 Radiated radio-frequency electromagnetic field immunity test - test level: 10 V level 3 (0.15...80 MHz) conforming to IEC 61000-4-6 Electromagnetic field immunity test - test level: 10 V/m level 3 (80 MHz...1 GHz) conforming to IEC 61000-4-3 Immunity to microbreaks and voltage drops - test level: 30 % (500 ms) conforming to IEC 61000-4-11 Immunity to microbreaks and voltage drops - test level: 100 % (20 ms) conforming to IEC 61000-4-11 Conducted and radiated emissions class B conforming to EN 55022

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.700 cm
Package 1 Width	8.400 cm
Package 1 Length	9.700 cm
Package 1 Weight	103.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	40
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.638 kg

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓

Mercury Free

✓

Rohs Exemption Information

Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure


[Product Environmental Profile](#)

Circularity Profile

[End of Life Information](#)


Dimensions Drawings

Dimensions

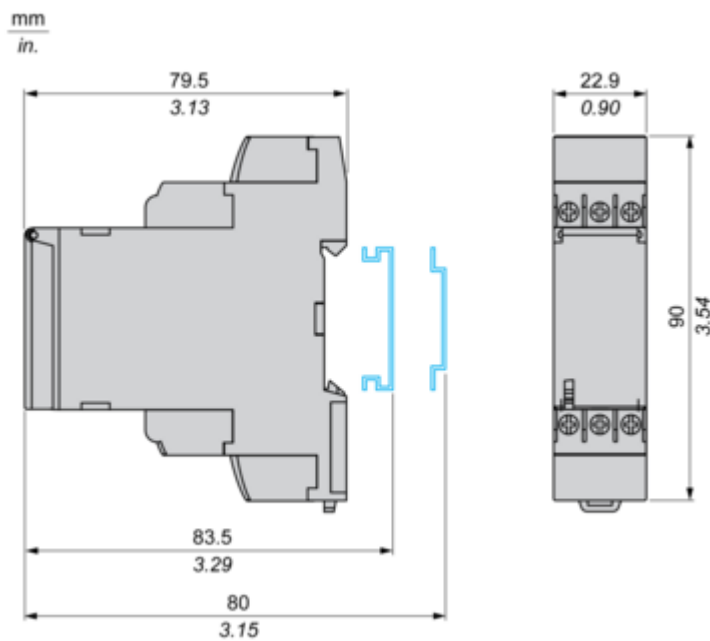


Connections and Schema

Internal Wiring Diagram



Wiring Diagram




Technical Description

Function A : Power on Delay Relay

Description

The timing period T begins on energization. After timing, the output(s) relay close(s).

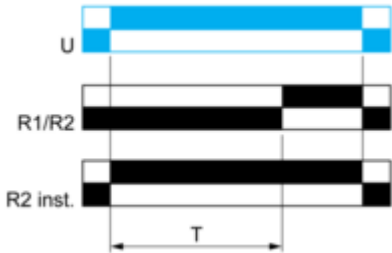


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function Ac : On- and Off-Delay Relay with Control Signal

Description

After power-up, closing of the control contact Y1 causes the timing period T to start (timing can be interrupted by operating the Gate control contact G). At the end of this timing period, the relay closes.
When control contact Y1 re-opens, the timing T starts. At the end of this timing period T
At the end of this timing period T, the output reverts to its initial position (timing can be interrupted by operating the Gate control contact G).

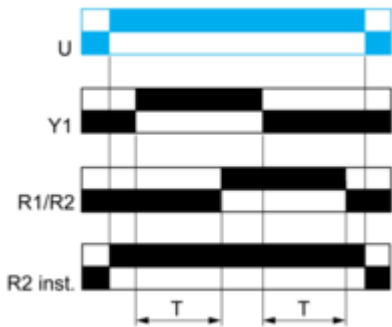


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function At : Power on Delay Relay (Summation) with Control Signal

Description

After power-up, the first opening of control contact Y1 starts the timing. Timing can be interrupted each time control contact closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

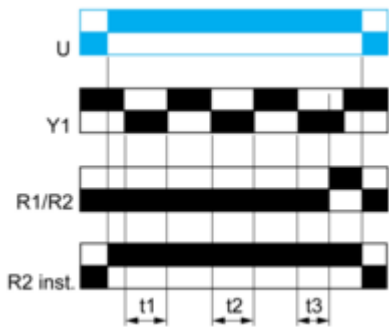


$T = t1+t2+t3$

Function B : Interval Relay with Control Signal

Description


After power-up, pulsing or maintaining control contact Y1 starts the timing T. The output relay closes for the duration of the timing period T then reverts to its initial state.

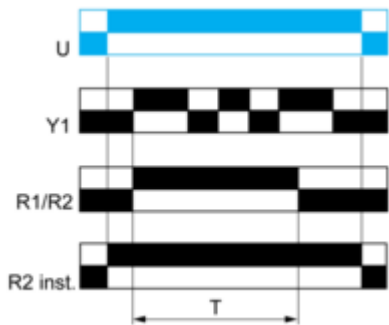

Function Bw : Double Interval Relay with Control Signal

Description


On closing and opening of control contact Y1, the output relay closes for the duration of the timing period T.

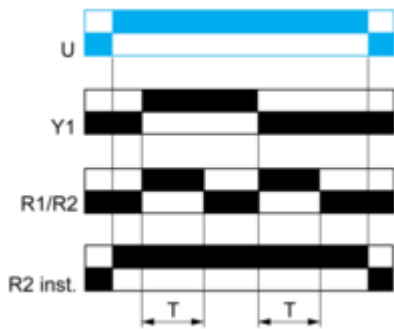

Function C : Off-Delay Relay with Control Signal

Description

After power-up and closing of the control contact Y1, the output relay closes. When control contact Y1 re-opens, timing T starts. At the end of the timing period, the output(s) relay revert(s) to its/their initial state.

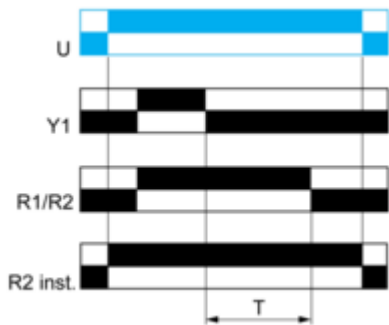


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse Off)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T.

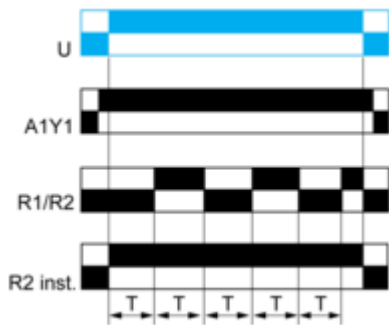


Before power-up Y1 should be permanently connected to A1.
2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse On)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T.

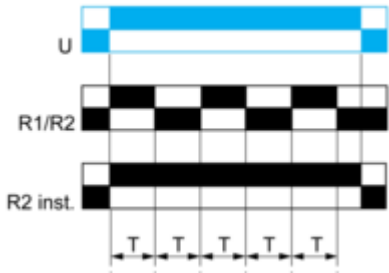


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function H : Interval Relay

Description

On energization of the relay, timing period T starts and the output(s) relay close(s). At the end of the timing period T, the output(s) relay revert(s) to its/their initial state

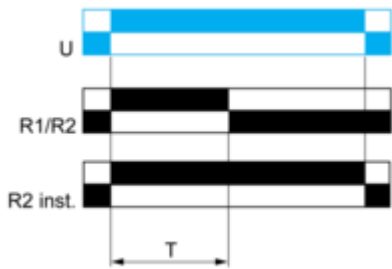

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Legend

- Relay de-energised
- Relay energised
- Output open
- Output closed


Y1 :	Control contact
R1/R2 :	2 timed outputs
R2 inst. :	The second output is instantaneous if the right position is selected
T :	Timing period
U :	Supply

Function Ht: Interval Relay & With Pause / Summation Control

Description


On energisation of power supply, output(s) R close(s) and timing period T starts.
The timing can be interrupted / paused each time X1 energizes.
When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state
Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.
Except for RE17*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.
The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output




$T = t1 + t2 + \dots$

Function: 2 Outputs




$T = t1 + t2 + \dots$

Function: 1 Output with Retrigger / Restart Control



$T = t1 + t2 + \dots$

Function: 2 Outputs with Retrigger / Restart Control



$T = t1 + t2 + \dots$

