

Product datasheet

Specifications



PILOT LIGHT MODULE 28V 30MM TYPE K+SK+KX

9001KM35

Price: 1,965.42 ZAR

Main

Range Of Product	Harmony 9001K Harmony 9001SK
Product Or Component Type	Light block
Device Short Name	9001K
Bulb Base	BA 9s
Light Block Supply	Direct via integral resistance

Complementary

Net Weight	0.05 kg
Light Source	Incandescent bulb
[Us] Rated Supply Voltage	24 V AC/DC
[Us] Rated Supply Voltage	24...28 V
Light Block Supply	Full voltage
Size	30 mm

Environment

Protective Treatment	TC
Ambient Air Temperature For Storage	-40...70 °C
Ambient Air Temperature For Operation	-25...70 °C
Ip Degree Of Protection	IP20 conforming to IEC 60529
Standards	IEC 60947-5-4 JIS C 852 UL 508 IEC 60947-1 CSA C22.2 No 14 JIS C 4520 IEC 60947-5-1
Product Certifications	NEMA UL 508
Electrical Shock Protection Class	Class II conforming to IEC 61140
Vibration Resistance	7 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock Resistance	50 gn conforming to IEC 60068-2-27

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Height	5.588 cm
Package 1 Width	9.144 cm
Package 1 Length	4.826 cm
Package 1 Weight	63.503 g

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product’s sustainability >](#)

Well-being performance

 Mercury Free	
 Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

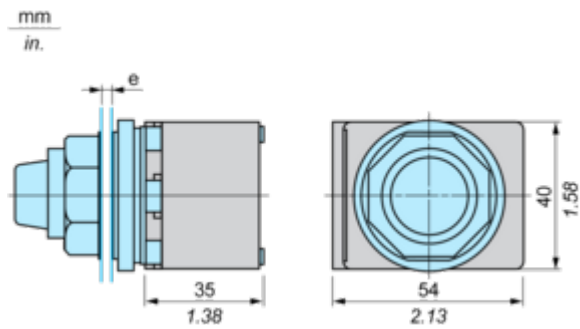

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.