


Product datasheet

Specifications



PUSH BUTTON LIGHT MODULE 30MMT-K+SK+KX

9001KM58LR

Price: 1,594.00 ZAR

Main

Range Of Product	Harmony 9001K Harmony 9001SK
Product Or Component Type	Light block
Device Short Name	9001K
Bulb Base	BA 9s
Light Block Supply	Direct

Complementary

Net Weight	0.115 kg
Light Source	LED
Light Block Colour	Red
[Us] Rated Supply Voltage	110...120 V AC/DC
[Us] Rated Supply Voltage	110...120 V
Light Block Supply	Full voltage
Light Source Colour	Red
Dimension Type	Shallow depth
Size	30 mm

Environment

Protective Treatment	TC
Ambient Air Temperature For Storage	-40...70 °C
Ambient Air Temperature For Operation	-25...70 °C
Ip Degree Of Protection	IP20 conforming to IEC 60529
Standards	CSA C22.2 No 14 EN/IEC 60947-5-4 EN/IEC 60947-1 JIS C 852 EN/IEC 60947-5-1 UL 508 JIS C 4520
Product Certifications	NEMA UL 508
Electrical Shock Protection Class	Class II conforming to IEC 61140
Vibration Resistance	7 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock Resistance	50 gn conforming to IEC 60068-2-27

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.572 cm
Package 1 Width	5.334 cm
Package 1 Length	9.144 cm
Package 1 Weight	113.398 g

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product’s sustainability >](#)

Well-being performance

 Mercury Free	
 Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

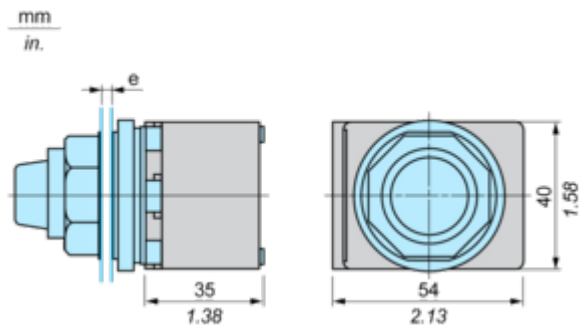

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.