

# Product datasheet

Specifications



empty control station - 9001K -  
stainless steel - 3 cut-outs Ø 30

9001KYSS3

Price: 4,449.76 ZAR

## Main

|                           |                                  |
|---------------------------|----------------------------------|
| Range Of Product          | Harmony 9001SK<br>Harmony 9001K  |
| Product Or Component Type | Empty enclosure                  |
| Device Short Name         | 9001K                            |
| Number Of Cut-Out         | 3 cut-outs                       |
| Cable Entry               | 1 entry tapped for 3/4" knockout |

## Complementary

|                     |                                          |
|---------------------|------------------------------------------|
| Product Destination | For Ø 30 mm control and signalling units |
| Material            | Stainless steel                          |
| Net Weight          | 1.715 kg                                 |

## Environment

|                                       |                                                  |
|---------------------------------------|--------------------------------------------------|
| Protective Treatment                  | TH                                               |
| Ambient Air Temperature For Storage   | -40...70 °C                                      |
| Ambient Air Temperature For Operation | -25...70 °C                                      |
| Overvoltage Category                  | II conforming to IEC 61140                       |
| Nema Degree Of Protection             | NEMA 1<br>NEMA 12<br>NEMA 3<br>NEMA 4<br>NEMA 4X |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type Of Package 1       | PCE       |
| Number Of Units In Package 1 | 1         |
| Package 1 Height             | 12.7 cm   |
| Package 1 Width              | 13.208 cm |
| Package 1 Length             | 29.21 cm  |
| Package 1 Weight             | 1.742 kg  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)


## Well-being performance

|                       |                                                                                   |     |
|-----------------------|-----------------------------------------------------------------------------------|-----|
| ✓                     | Reach Free Of Svhc                                                                |     |
| ✓                     | Toxic Heavy Metal Free                                                            |     |
| ✓                     | Mercury Free                                                                      |     |
| ✓                     | Rohs Exemption Information                                                        | Yes |
|                       |                                                                                   |     |
| Reach Regulation      | REACH Declaration                                                                 |     |
| Eu Rohs Directive     | Pro-active compliance (Product out of EU RoHS legal scope)<br>EU RoHS Declaration |     |
| China Rohs Regulation | China RoHS declaration                                                            |     |

Dimensions Drawings

Dimensions

Below drawing shows a 3-hole enclosure. Refer to the product characteristics to get the number of holes

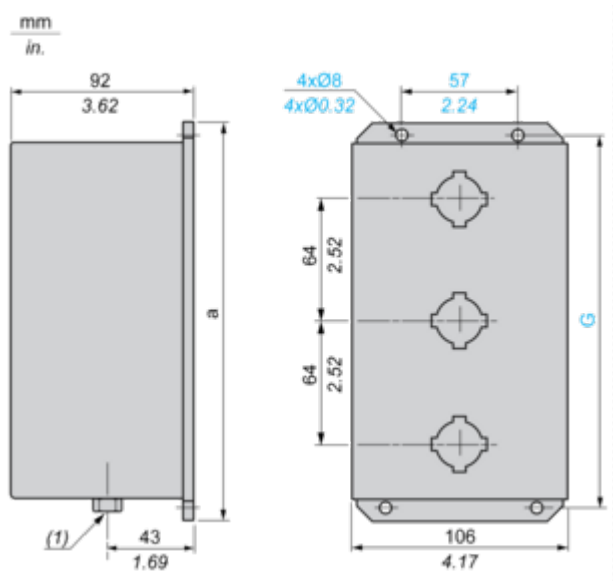

(1) Knockout conduit thread: 3/4".

| a   |       | G   |      |
|-----|-------|-----|------|
| mm  | in.   | mm  | in.  |
| 260 | 10.24 | 244 | 9.61 |