

# Product datasheet

Specifications



## Regulated Switch Power Supply. 1 or 2-phase. 100..240V. 24V. 20 A

ABL8RPM24200

Price: 13,605.74 ZAR

### Main

|                                     |                                                                                                     |
|-------------------------------------|-----------------------------------------------------------------------------------------------------|
| Range Of Product                    | Modicon Power Supply                                                                                |
| Product Or Component Type           | Power supply                                                                                        |
| Power Supply Type                   | Regulated switch mode                                                                               |
| Nominal Input Voltage               | 100...120 V AC single phase, terminal(s): N-L1<br>200...240 V AC phase to phase, terminal(s): L1-L2 |
| Rated Power In W                    | 480 W                                                                                               |
| Output Voltage                      | 24 V DC                                                                                             |
| Power Supply Output Current         | 20 A                                                                                                |
| Permissible Temporary Current Boost | 1.5 x In (for 4 s)                                                                                  |
| Anti-Harmonic Filter                | Low frequency harmonic currents                                                                     |

### Complementary

|                           |                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input Voltage Limits      | 85...132 V AC<br>170...264 V AC                                                                                                                                                                                                                                                                                                                 |
| Inrush Current            | 30 A                                                                                                                                                                                                                                                                                                                                            |
| Power Factor              | 0.68 at 240 V AC<br>0.69 at 120 V AC                                                                                                                                                                                                                                                                                                            |
| Efficiency                | 88 %                                                                                                                                                                                                                                                                                                                                            |
| Output Voltage Adjustment | 24...28.8 V adjustable                                                                                                                                                                                                                                                                                                                          |
| Power Dissipation In W    | 57.6 W                                                                                                                                                                                                                                                                                                                                          |
| Provided Equipment        | Power factor correction filter conforming to IEC 61000-3-2                                                                                                                                                                                                                                                                                      |
| Output Protection Type    | Against overload, protection technology: manual or automatic reset<br>Against overvoltage, protection technology: 30...32 V, manual reset<br>Against short-circuits, protection technology: manual or automatic reset<br>Against undervoltage, protection technology: tripping if U < 21.6 V<br>Thermal, protection technology: automatic reset |
| Connections - Terminals   | Removable screw terminal block: 2 x 2.5 mm², for diagnostic relay<br>Screw type terminals: 3 x 0.5...3 x 4 mm², (AWG 22...AWG 12) for input connection<br>Screw type terminals: 1 x 0.5...1 x 4 mm², (AWG 22...AWG 12) for input ground connection<br>Screw type terminals: 4 x 0.5...4 x 4 mm², (AWG 22...AWG 12) for output connection        |
| Status Led                | 1 LED (green and red) output voltage<br>1 LED (green, red and orange) output current                                                                                                                                                                                                                                                            |
| Depth                     | 145 mm                                                                                                                                                                                                                                                                                                                                          |
| Height                    | 125 mm                                                                                                                                                                                                                                                                                                                                          |
| Width                     | 146 mm                                                                                                                                                                                                                                                                                                                                          |
| Net Weight                | 1.6 kg                                                                                                                                                                                                                                                                                                                                          |

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                     |                                                                                                                      |
|---------------------|----------------------------------------------------------------------------------------------------------------------|
| Output Coupling     | Series<br>Parallel                                                                                                   |
| Marking             | CE                                                                                                                   |
| Mounting Support    | 35 x 7.5 mm symmetrical DIN rail<br>35 x 15 mm symmetrical DIN rail                                                  |
| Operating Position  | Vertical                                                                                                             |
| Supply              | SELV conforming to IEC 60950-1<br>SELV conforming to IEC 60204-1<br>SELV conforming to IEC 60364-4-41                |
| Dielectric Strength | 2500 V with between input and ground<br>3000 V with between input and output<br>500 V with between output and ground |

## Environment

|                                       |                                                                                                                                                                                                                                                    |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards                             | CSA C22.2 No 60950-1<br>UL 508<br>EN/IEC 62368-1                                                                                                                                                                                                   |
| Product Certifications                | CCSAus<br>EAC<br>KC<br>RCM<br>UL                                                                                                                                                                                                                   |
| Environmental Characteristic          | EMC conforming to IEC 61000-6-1<br>EMC conforming to IEC 61000-6-3<br>EMC conforming to EN 55024<br>EMC conforming to IEC 61000-6-4<br>EMC conforming to EN/IEC 61204-3<br>Safety conforming to IEC 60950-1<br>Safety conforming to EN/IEC 61204-3 |
| Operating Altitude                    | 2000 m                                                                                                                                                                                                                                             |
| Ip Degree Of Protection               | IP20 conforming to IEC 60529<br>IP10                                                                                                                                                                                                               |
| Ambient Air Temperature For Operation | 50...60 °C with derating factor mounting position A < 2000 m<br>-25...50 °C without derating mounting position A < 2000 m                                                                                                                          |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type Of Package 1       | PCE       |
| Number Of Units In Package 1 | 1         |
| Package 1 Height             | 16.084 cm |
| Package 1 Width              | 17.706 cm |
| Package 1 Length             | 17.786 cm |
| Package 1 Weight             | 2.82 kg   |
| Unit Type Of Package 2       | S04       |
| Number Of Units In Package 2 | 6         |
| Package 2 Height             | 30 cm     |
| Package 2 Width              | 40 cm     |
| Package 2 Length             | 60 cm     |
| Package 2 Weight             | 17.6 kg   |
| Unit Type Of Package 3       | P06       |
| Number Of Units In Package 3 | 36        |
| Package 3 Height             | 73.5 cm   |

|                  |           |
|------------------|-----------|
| Package 3 Width  | 60.0 cm   |
| Package 3 Length | 80.0 cm   |
| Package 3 Weight | 101.52 kg |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

Well-being performance

|                                                                                                                                    |     |
|------------------------------------------------------------------------------------------------------------------------------------|-----|
| <div></div> <div>Mercury Free</div>               |     |
| <div></div> <div>Rohs Exemption Information</div> | Yes |
| <div></div> <div>Pvc Free</div>                   |     |


Certifications & Standards

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| Reach Regulation         | <a href="#">REACH Declaration</a>                          |
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope) |
| China Rohs Regulation    | <a href="#">China RoHS declaration</a>                     |
| Environmental Disclosure | <a href="#">Product Environmental Profile</a>              |
| Circularity Profile      | <a href="#">End of Life Information</a>                    |

Dimensions Drawings

Regulated Switch Mode Power Supplies

Dimensions

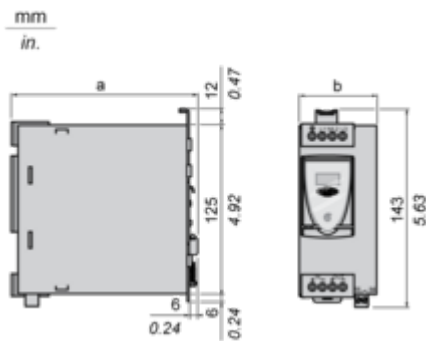


| ABL 8    | a in mm | a in in. | b in mm | b in in. |
|----------|---------|----------|---------|----------|
| RPS24030 | 125     | 4.92     | 45      | 1.77     |
| RPS24050 | 125     | 4.92     | 56      | 2.20     |
| RPS24100 | 145     | 5.71     | 86      | 3.39     |
| RPM24200 | 145     | 5.71     | 146     | 5.75     |
| WPS24200 | 160     | 6.30     | 96      | 3.78     |
| WPS24400 | 160     | 6.30     | 166     | 6.54     |

Connections and Schema

Regulated Switch Mode Power Supply

---


Internal Wiring Diagram




Regulated Switch Mode Power Supply

Line Supply Wiring Diagram


Single-phase (L-N) 100 to 120 V



Phase-to-phase (L1-L2) 200 to 500 V




Single-phase (L-N) 200 to 500 V



Regulated Switch Mode Power Supplies


Series or Parallel Connection

Series Connection

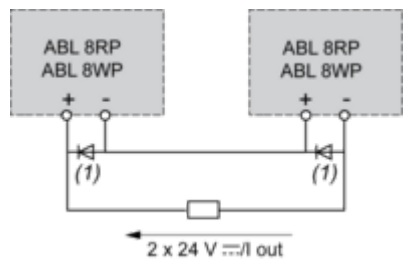

(1) Two Schottky diodes  $I_{min}$  = power supply  $I_n$  and  $V_{min}$  = 50 V

Parallel Connection

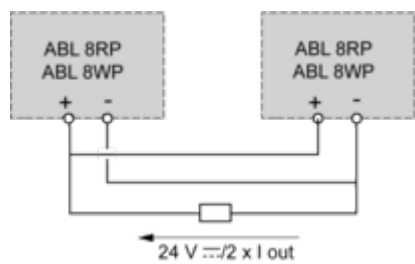

| Family             | Series              | Parallel        |
|--------------------|---------------------|-----------------|
| ABL 8RPS/8RPM/8WPS | 2 products max. (1) | 2 products max. |

**NOTE:** Series or parallel connection is only recommended for products with identical references.


For better availability, the power supplies can also be connected in parallel using the **ABL8RED24400** Redundancy module.

Performance Curves

Regulated Switch Mode Power Supplies

Derating

The ambient temperature is a determining factor that limits the power an electronic power supply can deliver continuously. If the temperature around the electronic components is too high, their life will be significantly reduced. The nominal ambient temperature for the Universal range of Phaseo power supplies is 50°C. Above this temperature, derating is necessary up to a maximum temperature of 60°C. The graph below shows the power (in relation to the nominal power) that the power supply can deliver continuously, depending on the ambient temperature.

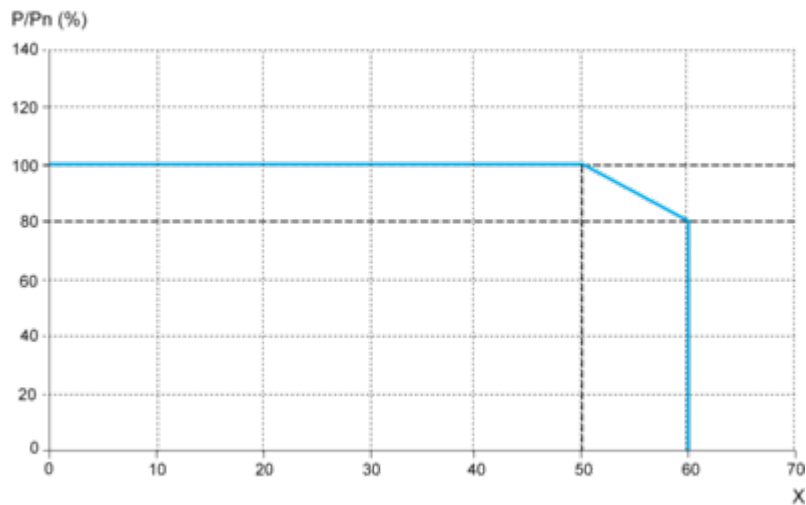

**X** Maximum operating temperature (°C)

ABL 8RPM, ABL 8RPS, ABL 8WPS mounted vertically


Derating should be considered in extreme operating conditions:

- Intensive operation (output current permanently close to the nominal current, combined with a high ambient temperature)
- Output voltage set above 24 Vdc (to compensate for line voltage drops, for example)
- Parallel connection to increase the total power

Regulated Switch Mode Power Supply


Load Limit

Manual Reset Protection Mode

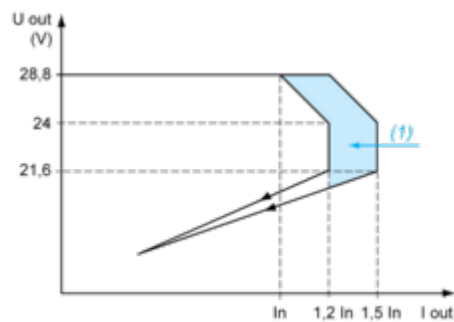


(1) Boost 4s

Automatic Reset Protection Mode

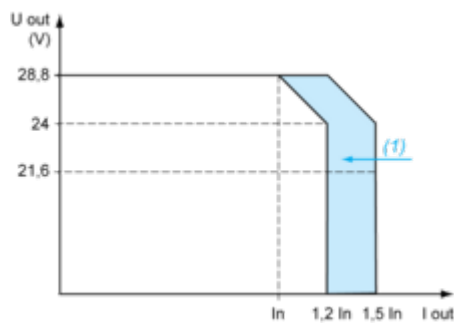

(1) Boost 4s

“Boost” Repeat Accuracy

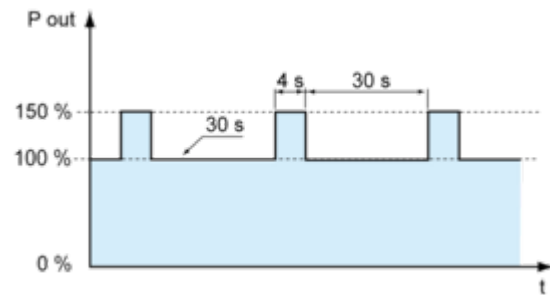

This type of operation is described in detail in the user manual, which can be downloaded from the website.