

# Product datasheet

Specifications



## soft starter for asynchronous motor. ATS48. 855 A. 230..415 V. 220..710 KW

ATS48M10Q

! Discontinued - Service only

! Discontinued on: 07 Aug 2023

! To be end-of-service on: 31 Dec 2030

**Price: 247,566.54 ZAR**

### Main

Range Of Product	Altistart 48
Product Or Component Type	Soft starter
Product Destination	Asynchronous motors
Product Specific Application	Heavy duty industry and pumps
Device Short Name	ATS48
Utilisation Category	AC-53A
Ue Power Supply Voltage	230...415 V - 15...10 %
Power Supply Frequency	50...60 Hz - 5...5 %
Motor Power Kw	630 kW at 400 V connection to the motor delta terminals for severe applications 710 kW at 400 V connection to the motor delta terminals for standard applications 220 kW at 230 V connection in the motor supply line for severe applications 250 kW at 230 V connection in the motor supply line for standard applications 355 kW at 230 V connection to the motor delta terminals for severe applications 400 kW at 400 V connection in the motor supply line for severe applications 500 kW at 400 V connection in the motor supply line for standard applications

### Complementary

Device Connection	To the motor delta terminals In the motor supply line
Protection Type	Phase failure: line Thermal protection: motor Thermal protection: starter
Standards	EN/IEC 60947-4-2
Product Certifications	CSA NOM 117 DNV C-Tick TCF SEPRO GOST UL CCC
Marking	CE
Discrete Input Number	5
Discrete Input Type	PTC, 750 Ohm at 25 °C (Stop, Run, LI3, LI4) logic, <= 8 mA 4300 Ohm
Discrete Input Logic	Positive logic Stop, Run, LI3, LI4 at State 0: < 5 V and <= 2 mA at State 1: > 11 V, >= 5 mA

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

<b>Minimum Switching Current</b>	10 mA at 6 V DC for relay outputs
<b>Discrete Output Number</b>	2
<b>Discrete Output Type</b>	(LO1) logic output 0 V common configurable (LO2) logic output 0 V common configurable (R1) relay outputs fault relay NO (R2) relay outputs end of starting relay NO (R3) relay outputs motor powered NO
<b>Analogue Output Type</b>	Current output AO: 0-20 mA or 4-20 mA, impedance <500 Ohm
<b>Communication Port Protocol</b>	Modbus
<b>Connector Type</b>	1 RJ45
<b>Communication Data Link</b>	Serial
<b>Physical Interface</b>	RS485 multidrop
<b>Transmission Rate</b>	4800, 9600 or 19200 bps
<b>Function Available</b>	External bypass (optional)
<b>Operating Position</b>	Vertical +/- 10 degree
<b>Height</b>	890 mm
<b>Width</b>	770 mm
<b>Depth</b>	315 mm
<b>Net Weight</b>	115 kg

## Environment

<b>Electromagnetic Compatibility</b>	Conducted and radiated emissions level A conforming to IEC 60947-4-2 Damped oscillating waves level 3 conforming to IEC 61000-4-12 Electrostatic discharge level 3 conforming to IEC 61000-4-2 Immunity to electrical transients level 4 conforming to IEC 61000-4-4 Immunity to radiated radio-electrical interference level 3 conforming to IEC 61000-4-3 Voltage/current impulse level 3 conforming to IEC 61000-4-5
<b>Relative Humidity</b>	0...95 % without condensation or dripping water conforming to EN/IEC 60068-2-3
<b>Ambient Air Temperature For Operation</b>	40...60 °C (with current derating of 2 % per °C) -10...40 °C (without derating)
<b>Ambient Air Temperature For Storage</b>	-25...70 °C
<b>Operating Altitude</b>	<= 1000 m without derating > 1000...2000 m with current derating of 2.2 % per additional 100 m

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	59.0 cm
<b>Package 1 Width</b>	90.0 cm
<b>Package 1 Length</b>	104.0 cm
<b>Package 1 Weight</b>	115.0 kg
<b>Unit Type Of Package 2</b>	PAL
<b>Number Of Units In Package 2</b>	1
<b>Package 2 Height</b>	60.0 cm
<b>Package 2 Width</b>	90.0 cm
<b>Package 2 Length</b>	104.0 cm

---

Package 2 Weight 127.0 kg

## Contractual warranty

---

Warranty 18 months

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

## Well-being performance

✓ Mercury Free

---

✓ Rohs Exemption Information [Yes](#)

---

**Reach Regulation** [REACH Declaration](#)

---

**Eu Rohs Directive** Pro-active compliance (Product out of EU RoHS legal scope)

---

**China Rohs Regulation** [China RoHS declaration](#)

---


**Weee** The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

---

Dimensions Drawings

Dimensions

---

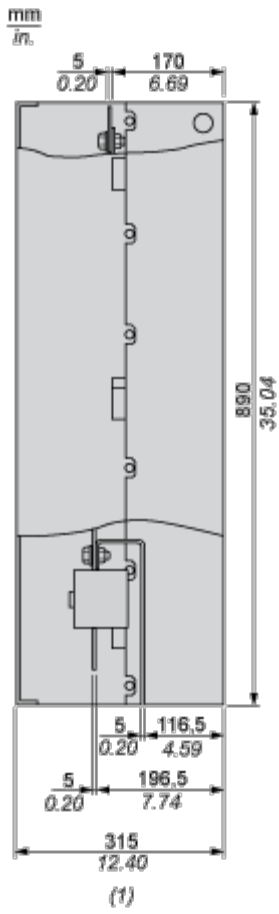



Mounting and Clearance

Clearance

---

