

# Product datasheet

Specifications



## Variable speed drive. Altivar Process ATV600. ATV630. 75kW/ 100 hp. 500V/690 V. IP00

ATV630D75Y6

**Price: 207,497.85 ZAR**

### Main

|                                    |  |
|------------------------------------|--|
| Range Of Product                   | Altivar Process ATV600   |
| Product Or Component Type          | Variable speed drive   |
| Product Specific Application       | Process and utilities  |
| Device Short Name                  | ATV630   |
| Variant                            | Standard version   |
| Product Destination                | Asynchronous motors<br>Synchronous motors  |
| Emc Filter                         | Integrated with 25 m conforming to IEC 61800-3 category C3   |
| Ip Degree Of Protection            | IP00 conforming to IEC 61800-5-1<br>IP00 conforming to IEC 60529<br>IP20 (with kit VW3A9706) conforming to IEC 61800-5-1<br>IP20 (with kit VW3A9706) conforming to IEC 60529 |
| [Us] Rated Supply Voltage          | 500...690 V  |
| Type Of Cooling                    | Forced convection  |
| Supply Frequency                   | 50...60 Hz - 5...5 %   |
| [Us] Rated Supply Voltage          | 500...690 V - 15...10 %  |
| Motor Power Kw                     | 55 kW at 500 V (normal duty)<br>45 kW at 500 V (heavy duty)<br>75 kW at 690 V (normal duty)<br>55 kW at 690 V (heavy duty)   |
| Motor Power Hp                     | 75 hp at 500 V normal duty<br>60 hp at 500 V heavy duty<br>100 hp at 690 V normal duty<br>75 hp at 690 V heavy duty  |
| Line Current                       | 82.7 A at 500 V (normal duty)<br>87.7 A at 690 V (normal duty)<br>71 A at 500 V (heavy duty)<br>68.5 A at 690 V (heavy duty)   |
| Prospective Line Isc               | 70 kA  |
| Apparent Power                     | 104.8 kVA at 690 V (normal duty)<br>81.9 kVA at 690 V (heavy duty)   |
| Continuous Output Current          | 83 A at 2.5 kHz for normal duty<br>66 A at 2.5 kHz for heavy duty  |
| Asynchronous Motor Control Profile | Optimized torque mode<br>Constant torque standard<br>Variable torque standard  |
| Synchronous Motor Control Profile  | Permanent magnet motor<br>Synchronous reluctance motor   |
| Speed Drive Output Frequency       | 0.1...500 Hz   |
| Nominal Switching Frequency        | 2.5 kHz  |

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

|                                    |   |
|------------------------------------|---|
| <b>Switching Frequency</b>         | 1...4.9 kHz adjustable<br>2.5...4.9 kHz with derating factor  |
| <b>Safety Function</b>             | STO (safe torque off) SIL 3   |
| <b>Discrete Input Logic</b>        | 16 preset speeds  |
| <b>Communication Port Protocol</b> | Ethernet<br>Modbus serial<br>Modbus TCP   |
| <b>Option Card</b>                 | Slot A: communication module, Profibus DP V1<br>Slot A: communication module, PROFINET<br>Slot A: communication module, DeviceNet<br>Slot A: communication module, Modbus TCP/EtherNet/IP<br>Slot A: communication module, CANopen daisy chain RJ45<br>Slot A: communication module, CANopen SUB-D 9<br>Slot A: communication module, CANopen screw terminals<br>Slot A/slot B: digital and analog I/O extension module<br>Slot A/slot B: output relay extension module<br>Slot A: communication module, Ethernet IP/Modbus TCP/MD-Link<br>Communication module, BACnet MS/TP<br>Communication module, Ethernet Powerlink |

## Complementary

|  |  |
|--|--|
| <b>Mounting Mode</b>                       | Wall mount   |
| <b>Maximum Transient Current</b>           | 91.3 A during 60 s (normal duty)<br>99 A during 60 s (heavy duty)  |
| <b>Network Number Of Phases</b>            | 3 phases   |
| <b>Discrete Output Number</b>              | 0  |
| <b>Discrete Output Type</b>                | Relay outputs R1A, R1B, R1C 250 V AC 3000 mA<br>Relay outputs R1A, R1B, R1C 30 V DC 3000 mA<br>Relay outputs R2A, R2C 250 V AC 5000 mA<br>Relay outputs R2A, R2C 30 V DC 5000 mA<br>Relay outputs R3A, R3C 250 V AC 5000 mA<br>Relay outputs R3A, R3C 30 V DC 5000 mA  |
| <b>Output Voltage</b>                      | <= power supply voltage  |
| <b>Permissible Temporary Current Boost</b> | 1.1 x I <sub>n</sub> during 60 s (normal duty)<br>1.5 x I <sub>n</sub> during 60 s (heavy duty)  |
| <b>Motor Slip Compensation</b>             | Can be suppressed<br>Adjustable<br>Not available in permanent magnet motor law<br>Automatic whatever the load  |
| <b>Acceleration And Deceleration Ramps</b> | S, U or customized<br>Linear adjustable separately from 0.01...9999 s  |
| <b>Physical Interface</b>                  | Ethernet<br>2-wire RS 485  |
| <b>Braking To Standstill</b>               | By DC injection  |
| <b>Protection Type</b>                     | Thermal protection: motor<br>Safe torque off: motor<br>Motor phase break: motor<br>Thermal protection: drive<br>Safe torque off: drive<br>Overheating: drive<br>Overcurrent between output phases and earth: drive<br>Overload of output voltage: drive<br>Short-circuit protection: drive<br>Motor phase break: drive<br>Overvoltages on the DC bus: drive<br>Line supply overvoltage: drive<br>Line supply undervoltage: drive<br>Line supply phase loss: drive<br>Overspeed: drive<br>Break on the control circuit: drive |

|                               |  |
|-------------------------------|--|
| <b>Transmission Rate</b>      | 10, 100 Mbits<br>4800 bps, 9600 bps, 19200 bps, 38.4 Kbps  |
| <b>Frequency Resolution</b>   | Display unit: 0.1 Hz<br>Analog input: 0.012/50 Hz  |
| <b>Transmission Frame</b>     | RTU  |
| <b>Electrical Connection</b>  | Control: removable screw terminals 0.5...1.5 mm <sup>2</sup> /AWG 20...AWG 16<br>Line side: screw terminal 35...50 mm <sup>2</sup> /AWG 2...AWG 1<br>Motor: screw terminal 35...50 mm <sup>2</sup> /AWG 2...AWG 1  |
| <b>Connector Type</b>         | RJ45 (on the remote graphic terminal) for Ethernet/Modbus TCP<br>RJ45 (on the remote graphic terminal) for Modbus serial   |
| <b>Data Format</b>            | 8 bits, configurable odd, even or no parity  |
| <b>Type Of Polarization</b>   | No impedance   |
| <b>Exchange Mode</b>          | Half duplex, full duplex, autonegotiation Ethernet/Modbus TCP  |
| <b>Number Of Addresses</b>    | 1...247 for Modbus serial  |
| <b>Method Of Access</b>       | Slave Modbus TCP   |
| <b>Supply</b>                 | External supply for digital inputs: 24 V DC (19...30 V), <1.25 mA, protection type: overload and short-circuit protection<br>Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection<br>Internal supply for digital inputs and STO: 24 V DC (21...27 V), <200 mA, protection type: overload and short-circuit protection |
| <b>Local Signalling</b>       | 3 LEDs for local diagnostic<br>3 LEDs (dual colour) for embedded communication status<br>4 LEDs (dual colour) for communication module status<br>1 LED (red) for presence of voltage   |
| <b>Width</b>                  | 331 mm   |
| <b>Height</b>                 | 630 mm   |
| <b>Depth</b>                  | 297 mm   |
| <b>Net Weight</b>             | 53 kg  |
| <b>Analogue Input Number</b>  | 3  |
| <b>Analogue Input Type</b>    | AI1, AI2, AI3 software-configurable voltage: 0...10 V DC, impedance: 31.5 kOhm, resolution 12 bits<br>AI1, AI2, AI3 software-configurable current: 0...20 mA, impedance: 250 Ohm, resolution 12 bits<br>AI2 voltage analog input: - 10...10 V DC, impedance: 31.5 kOhm, resolution 12 bits   |
| <b>Discrete Input Number</b>  | 8  |
| <b>Discrete Input Type</b>    | DI7, DI8 programmable as pulse input: 0...30 kHz, 24 V DC (<= 30 V)  |
| <b>Input Compatibility</b>    | DI1...DI6: discrete input level 1 PLC conforming to IEC 61131-2<br>DI5, DI6: discrete input level 1 PLC conforming to IEC 65A-68<br>STOA, STOB: discrete input level 1 PLC conforming to IEC 61131-2   |
| <b>Discrete Input Logic</b>   | Positive logic (source) (DI1...DI8), < 5 V (state 0), > 11 V (state 1)<br>Negative logic (sink) (DI1...DI8), > 16 V (state 0), < 10 V (state 1)  |
| <b>Analogue Output Number</b> | 2  |
| <b>Analogue Output Type</b>   | Software-configurable voltage AQ1, AQ2: 0...10 V DC impedance 470 Ohm, resolution 10 bits<br>Software-configurable current AQ1, AQ2: 0...20 mA, resolution 10 bits<br>Software-configurable current DQ-, DQ+: 30 V DC<br>Software-configurable current DQ-, DQ+: 100 mA  |
| <b>Sampling Duration</b>      | 2 ms +/- 0.5 ms (DI1...DI4) - discrete input<br>5 ms +/- 1 ms (DI5, DI6) - discrete input<br>5 ms +/- 0.1 ms (AI1, AI2, AI3) - analog input<br>10 ms +/- 1 ms (AO1) - analog output  |
| <b>Accuracy</b>               | +/- 0.6 % AI1, AI2, AI3 for a temperature variation 60 °C analog input<br>+/- 1 % AO1, AO2 for a temperature variation 60 °C analog output   |

|                                  |  |
|----------------------------------|--|
| <b>Linearity Error</b>           | AI1, AI2, AI3: +/- 0.15 % of maximum value for analog input<br>AO1, AO2: +/- 0.2 % for analog output   |
| <b>Relay Output Number</b>       | 3  |
| <b>Relay Output Type</b>         | Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles<br>Configurable relay logic R2: sequence relay NO electrical durability 100000 cycles<br>Configurable relay logic R3: sequence relay NO electrical durability 100000 cycles   |
| <b>Refresh Time</b>              | Relay output (R1, R2, R3): 5 ms (+/- 0.5 ms)   |
| <b>Minimum Switching Current</b> | Relay output R1, R2, R3: 5 mA at 24 V DC   |
| <b>Maximum Switching Current</b> | Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 250 V AC<br>Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 30 V DC<br>Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC |
| <b>Isolation</b>                 | Between power and control terminals  |
| <b>Maximum Output Frequency</b>  | 500 kHz  |
| <b>Maximum Input Current</b>     | 87.7 A   |
| <b>Quantity Per Set</b>          | 1  |
| <b>Enclosure Mounting</b>        | Wall mounted   |

## Environment

|  |  |
|--|--|
| <b>Insulation Resistance</b>                 | > 1 MOhm 500 V DC for 1 minute to earth  |
| <b>Noise Level</b>                           | 52 dB conforming to 86/188/EEC   |
| <b>Power Dissipation In W</b>                | Natural convection: 268 W at 500 V, switching frequency 2.5 kHz<br>Forced convection: 1075 W at 500 V, switching frequency 2.5 kHz   |
| <b>Volume Of Cooling Air</b>                 | 406 m <sup>3</sup> /h  |
| <b>Operating Position</b>                    | Vertical +/- 10 degree   |
| <b>Maximum Thdi</b>                          | <48 % with external line choke conforming to IEC 61000-3-12  |
| <b>Electromagnetic Compatibility</b>         | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2<br>Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3<br>Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4<br>1.2/50 μs - 8/20 μs surge immunity test level 3 conforming to IEC 61000-4-5<br>Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 |
| <b>Pollution Degree</b>                      | 2 conforming to IEC 61800-5-1  |
| <b>Vibration Resistance</b>                  | 1.5 mm peak to peak (f= 2...13 Hz) conforming to IEC 60068-2-6<br>1 gn (f= 13...200 Hz) conforming to IEC 60068-2-6  |
| <b>Shock Resistance</b>                      | 15 gn for 11 ms conforming to IEC 60068-2-27   |
| <b>Relative Humidity</b>                     | 5...95 % without condensation conforming to IEC 60068-2-3  |
| <b>Ambient Air Temperature For Operation</b> | -15...50 °C (without derating)<br>50...60 °C (with derating factor)  |
| <b>Ambient Air Temperature For Storage</b>   | -40...70 °C  |
| <b>Operating Altitude</b>                    | <= 1000 m without derating<br>1000...4800 m with current derating 1 % per 100 m  |
| <b>Product Certifications</b>                | TÜV<br>UL<br>CSA   |
| <b>Marking</b>                               | CE   |

|                             |  |
|-----------------------------|--|
| <b>Standards</b>            | UL 508C<br>IEC 61800-3<br>EN/IEC 61800-3 environment 2 category C3<br>IEC 61800-5-1<br>IEC 61000-3-12<br>IEC 60721-3<br>IEC 61508<br>IEC 13849-1 |
| <b>Overvoltage Category</b> | III  |
| <b>Regulation Loop</b>      | Adjustable PID regulator   |
| <b>Noise Level</b>          | 56 dB  |
| <b>Pollution Degree</b>     | 2  |

## Packing Units

|                                     |          |
|-------------------------------------|----------|
| <b>Unit Type Of Package 1</b>       | PCE      |
| <b>Number Of Units In Package 1</b> | 1        |
| <b>Package 1 Height</b>             | 61.0 cm  |
| <b>Package 1 Width</b>              | 50.0 cm  |
| <b>Package 1 Length</b>             | 120.0 cm |
| <b>Package 1 Weight</b>             | 50.5 kg  |

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Resource performance

Upgraded Components Available

## Well-being performance

Mercury Free

Rohs Exemption Information Yes

## Certifications & Standards

**Reach Regulation** [REACH Declaration](#)

**Eu Rohs Directive** Pro-active compliance (Product out of EU RoHS legal scope)

**China Rohs Regulation** [China RoHS declaration](#)

**Environmental Disclosure** [Product Environmental Profile](#)

**Weee** The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

**Circularity Profile** [End of Life Information](#)

Dimensions Drawings


Dimensions

---


Drives without Top Cover

Front View with EMC Plate, Front, Left and Rear Views without EMC Plate

mm  
in.

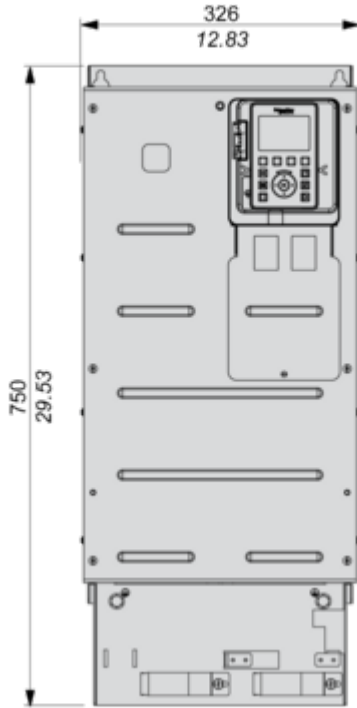


mm  
in.

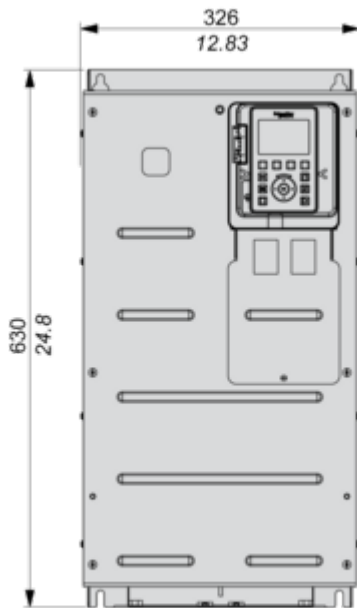

mm  
in.




mm  
in.

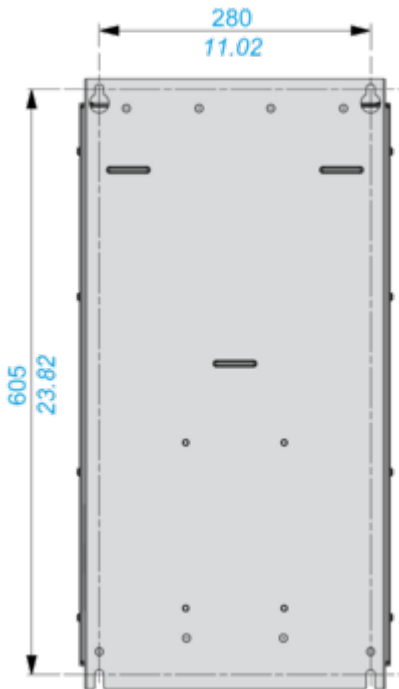

Mounting and Clearance

Clearances

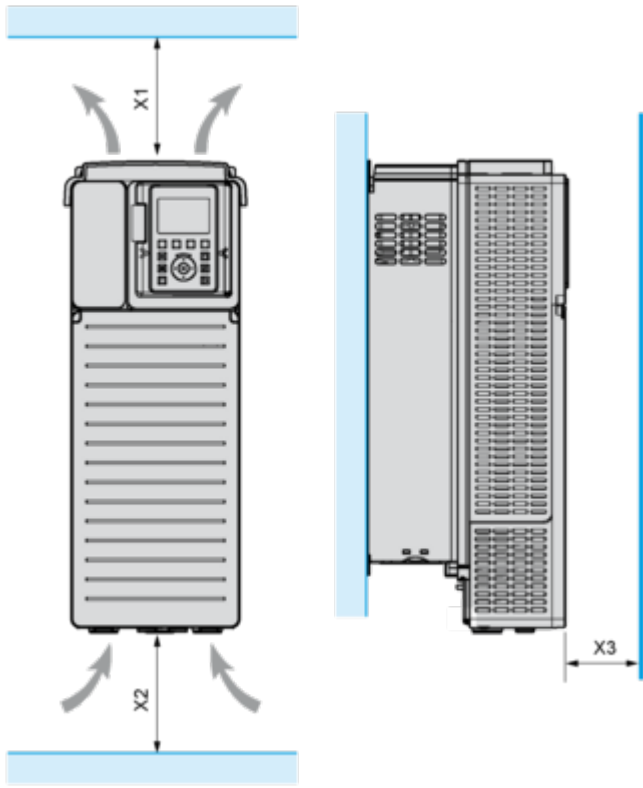

| X1                  | X2                  | X3                 |
|---------------------|---------------------|--------------------|
| ≥ 100 mm (3.94 in.) | ≥ 100 mm (3.94 in.) | ≥ 10 mm (0.39 in.) |

Mounting Types


---

**Mounting Type A: Individual IP21**



$a \geq 0$

**Mounting Type B: Side by Side IP20**

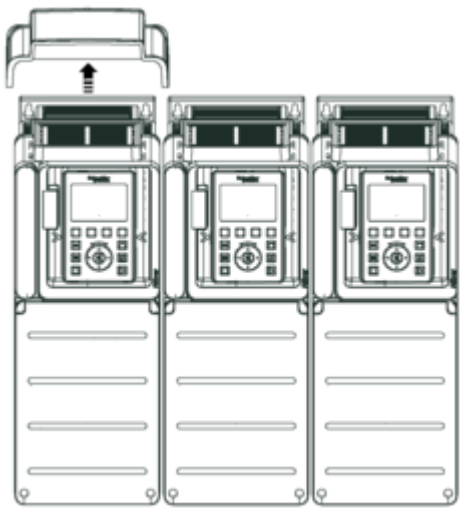

**Mounting Type C: Individual IP20**



$a \geq 0$

Connections and Schema

**Three-Phase Power Supply with Upstream Breaking via Line Contactor**

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1



(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.

A1 : Drive

KM1 : Line Contactor


Q2, Q3 : Circuit breakers

S1, S2 : Pushbuttons

T1 : Transformer for control part

**Three-Phase Power Supply with Downstream Breaking via Contactor**

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

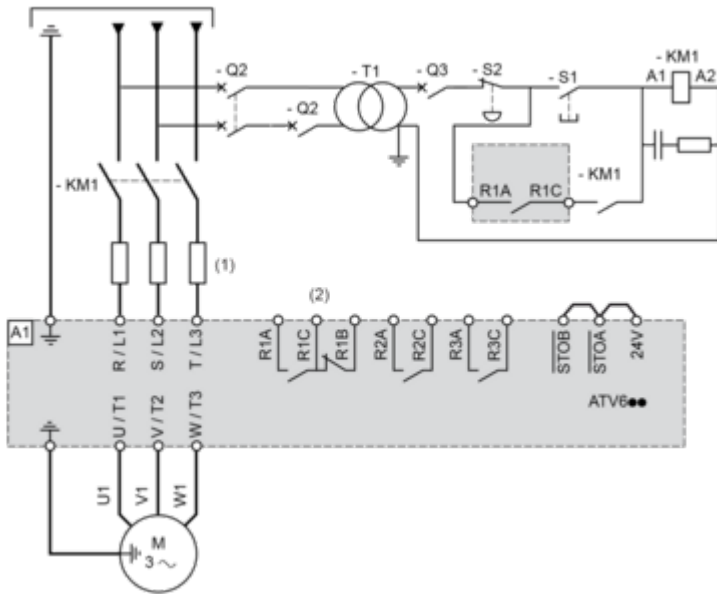


(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.

A1 : Drive

KM1 : Contactor

Control Block Wiring Diagram

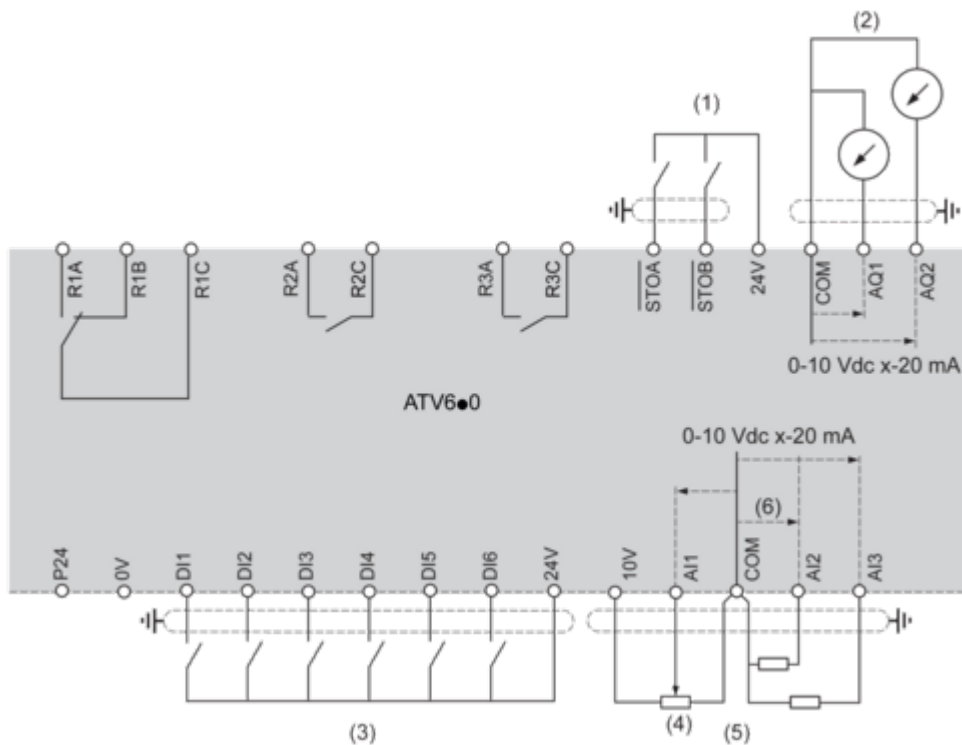

- (1) Safe Torque Off
- (2) Analog Output
- (3) Digital Input
- (4) Reference potentiometer
- (5) Analog Input
- R1A, R1B, R1C : Fault relay
- R2A, R2C : Sequence relay
- R3A, R3C : Sequence relay

Sensor Connection

It is possible to connect either 1 or 3 sensors on terminals AI2 or AI3.



**Sink / Source Switch Configuration**

The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.

**Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs**




**Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs**



**Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs**




**Switch Set to EXT Position Using an External Power Supply for the DIs**

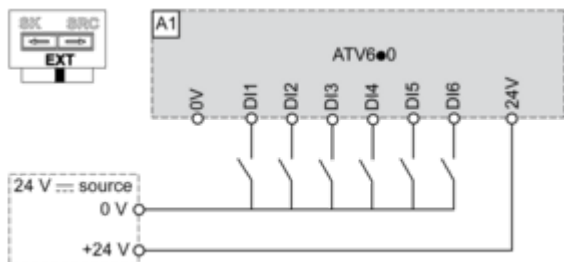

Performance Curves

Derating Curves

---

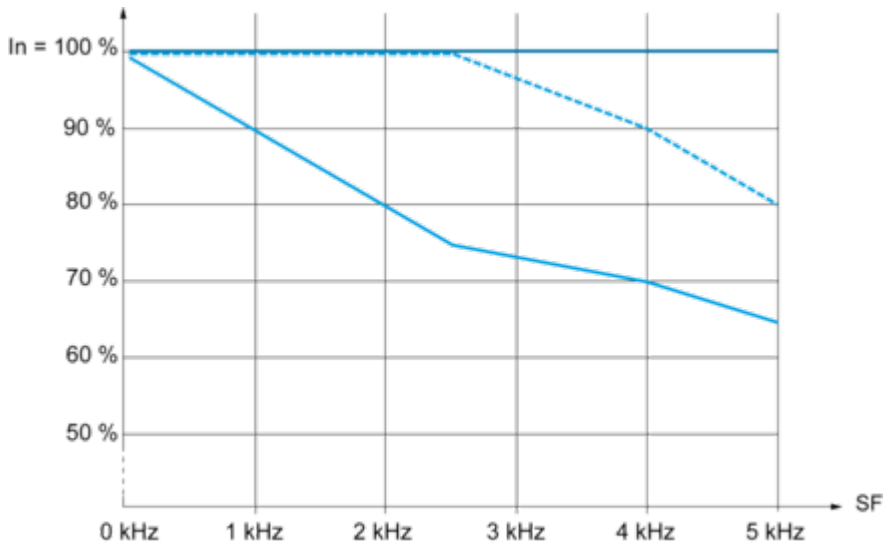

- 40 °C (104 °F) - Mounting type A, B and C
- - - 50 °C (122 °F) - Mounting type A, B and C
- 60 °C (140 °F) - Mounting type B and C

In : Nominal Drive Current

SF : Switching Frequency