

# Product datasheet

Specifications



Variable speed drive. Altivar  
Process ATV600. ATV650. 55 kW.  
400...480 V. IP55

ATV650D55N4E

Price: 156,498.69 ZAR

## Main

|                                    |                                                                                                                                |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Range Of Product                   | Altivar Process ATV600                                                                                                         |
| Product Or Component Type          | Variable speed drive                                                                                                           |
| Product Specific Application       | Process and utilities                                                                                                          |
| Device Short Name                  | ATV650                                                                                                                         |
| Variant                            | With disconnect switch                                                                                                         |
| Product Destination                | Asynchronous motors<br>Synchronous motors                                                                                      |
| Emc Filter                         | Integrated with 150 m conforming to IEC 61800-3 category C3                                                                    |
| Ip Degree Of Protection            | IP55 conforming to IEC 60529<br>IP55 conforming to IEC 61800-5-1                                                               |
| [Us] Rated Supply Voltage          | 380...480 V                                                                                                                    |
| Type Of Cooling                    | Forced convection                                                                                                              |
| Supply Frequency                   | 50...60 Hz - 5...5 %                                                                                                           |
| [Us] Rated Supply Voltage          | 380...480 V - 15...10 %                                                                                                        |
| Motor Power Kw                     | 45 kW (heavy duty)<br>55 kW (normal duty)                                                                                      |
| Motor Power Hp                     | 60 hp heavy duty<br>75 hp normal duty                                                                                          |
| Line Current                       | 84.2 A at 480 V (normal duty)<br>81.4 A at 380 V (heavy duty)<br>71.8 A at 480 V (heavy duty)<br>97.2 A at 380 V (normal duty) |
| Prospective Line Isc               | 50 kA                                                                                                                          |
| Apparent Power                     | 59.7 kVA at 480 V (heavy duty)<br>70 kVA at 480 V (normal duty)                                                                |
| Continuous Output Current          | 87 A for heavy duty<br>106 A at 2.5 kHz for normal duty                                                                        |
| Asynchronous Motor Control Profile | Variable torque standard<br>Constant torque standard<br>Constant torque standard                                               |
| Synchronous Motor Control Profile  | Synchronous reluctance motor<br>Permanent magnet motor                                                                         |
| Speed Drive Output Frequency       | 0.1...500 Hz                                                                                                                   |
| Nominal Switching Frequency        | 2.5 kHz                                                                                                                        |
| Switching Frequency                | 2...8 kHz adjustable<br>2.5...8 kHz with derating factor                                                                       |
| Safety Function                    | STO (safe torque off) SIL 3                                                                                                    |

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Discrete Input Logic        | 16 preset speeds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Communication Port Protocol | Ethernet<br>Modbus TCP<br>Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Option Card                 | Slot A: communication module, PROFINET<br>Slot A: communication module, DeviceNet<br>Slot A: communication module, Modbus TCP/EtherNet/IP<br>Slot A: communication module, CANopen daisy chain RJ45<br>Slot A: communication module, CANopen SUB-D 9<br>Slot A: communication module, CANopen screw terminals<br>Slot A/slot B: digital and analog I/O extension module<br>Slot A/slot B: output relay extension module<br>Slot A: communication module, Ethernet IP/Modbus TCP/MD-Link<br>Communication module, BACnet MS/TP<br>Communication module, Ethernet Powerlink<br>Slot A: communication module, Profibus DP V1 |

## Complementary

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting Mode                       | Wall mount                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Maximum Transient Current           | 132 A during 60 s (heavy duty)<br>116.6 A during 60 s (normal duty)                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Network Number Of Phases            | 3 phases                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Discrete Output Number              | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Discrete Output Type                | Relay outputs R1A, R1B, R1C 250 V AC 3000 mA<br>Relay outputs R1A, R1B, R1C 30 V DC 3000 mA<br>Relay outputs R2A, R2C 250 V AC 5000 mA<br>Relay outputs R2A, R2C 30 V DC 5000 mA<br>Relay outputs R3A, R3C 250 V AC 5000 mA<br>Relay outputs R3A, R3C 30 V DC 5000 mA                                                                                                                                                                                                                                                        |
| Output Voltage                      | <= power supply voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Permissible Temporary Current Boost | 1.5 x I <sub>n</sub> during 60 s (heavy duty)<br>1.1 x I <sub>n</sub> during 60 s (normal duty)                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Motor Slip Compensation             | Automatic whatever the load<br>Not available in permanent magnet motor law<br>Can be suppressed<br>Adjustable                                                                                                                                                                                                                                                                                                                                                                                                                |
| Acceleration And Deceleration Ramps | Linear adjustable separately from 0.01...9999 s                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Physical Interface                  | Ethernet<br>2-wire RS 485                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Braking To Standstill               | By DC injection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Protection Type                     | Safe torque off: motor<br>Motor phase break: motor<br>Thermal protection: drive<br>Safe torque off: drive<br>Overheating: drive<br>Overcurrent between output phases and earth: drive<br>Overload of output voltage: drive<br>Short-circuit protection: drive<br>Motor phase break: drive<br>Overvoltages on the DC bus: drive<br>Line supply overvoltage: drive<br>Line supply undervoltage: drive<br>Line supply phase loss: drive<br>Overspeed: drive<br>Break on the control circuit: drive<br>Thermal protection: motor |
| Transmission Rate                   | 10, 100 Mbits<br>4800 bps, 9600 bps, 19200 bps, 38.4 Kbps                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Frequency Resolution                | Analog input: 0.012/50 Hz<br>Display unit: 0.1 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Transmission Frame                  | RTU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical Connection  | Motor: screw terminal 70...120 mm²/AWG 1/0...250 kcmil<br>Line side: screw terminal 50...120 mm²/AWG 1...250 kcmil<br>Control: removable screw terminals 0.5...1.5 mm²                                                                                                                                                                                                                                         |
| Connector Type         | RJ45 (on the remote graphic terminal) for Modbus serial<br>RJ45 (on the remote graphic terminal) for Ethernet/Modbus TCP                                                                                                                                                                                                                                                                                       |
| Data Format            | 8 bits, configurable odd, even or no parity                                                                                                                                                                                                                                                                                                                                                                    |
| Type Of Polarization   | No impedance                                                                                                                                                                                                                                                                                                                                                                                                   |
| Exchange Mode          | Half duplex, full duplex, autonegotiation Ethernet/Modbus TCP                                                                                                                                                                                                                                                                                                                                                  |
| Number Of Addresses    | 1...247 for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                      |
| Method Of Access       | Slave Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                               |
| Supply                 | Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection<br>Internal supply for digital inputs and STO: 24 V DC (21...27 V), <200 mA, protection type: overload and short-circuit protection<br>External supply for digital inputs: 24 V DC (19...30 V), <1.25 mA, protection type: overload and short-circuit protection |
| Local Signalling       | 3 LEDs (dual colour) for embedded communication status<br>4 LEDs (dual colour) for communication module status<br>1 LED (red) for presence of voltage<br>3 LEDs for local diagnostic                                                                                                                                                                                                                           |
| Width                  | 345 mm                                                                                                                                                                                                                                                                                                                                                                                                         |
| Height                 | 1250 mm                                                                                                                                                                                                                                                                                                                                                                                                        |
| Depth                  | 436 mm                                                                                                                                                                                                                                                                                                                                                                                                         |
| Net Weight             | 89.3 kg                                                                                                                                                                                                                                                                                                                                                                                                        |
| Analogue Input Number  | 3                                                                                                                                                                                                                                                                                                                                                                                                              |
| Analogue Input Type    | AI1, AI2, AI3 software-configurable voltage: 0...10 V DC, impedance: 31.5 kOhm, resolution 12 bits<br>AI1, AI2, AI3 software-configurable current: 0...20 mA, impedance: 250 Ohm, resolution 12 bits<br>AI2 voltage analog input: - 10...10 V DC, impedance: 31.5 kOhm, resolution 12 bits                                                                                                                     |
| Discrete Input Number  | 8                                                                                                                                                                                                                                                                                                                                                                                                              |
| Discrete Input Type    | DI7, DI8 programmable as pulse input: 0...30 kHz, 24 V DC (<= 30 V)                                                                                                                                                                                                                                                                                                                                            |
| Input Compatibility    | DI5, DI6: discrete input level 1 PLC conforming to IEC 65A-68<br>STOA, STOB: discrete input level 1 PLC conforming to IEC 61131-2<br>DI1...DI6: discrete input level 1 PLC conforming to IEC 61131-2                                                                                                                                                                                                           |
| Discrete Input Logic   | Positive logic (source) (DI1...DI8), < 5 V (state 0), > 11 V (state 1)<br>Negative logic (sink) (DI1...DI8), > 16 V (state 0), < 10 V (state 1)                                                                                                                                                                                                                                                                |
| Analogue Output Number | 2                                                                                                                                                                                                                                                                                                                                                                                                              |
| Analogue Output Type   | Software-configurable voltage AQ1, AQ2: 0...10 V DC impedance 470 Ohm, resolution 10 bits<br>Software-configurable current AQ1, AQ2: 0...20 mA, resolution 10 bits<br>Software-configurable current DQ-, DQ+: 30 V DC<br>Software-configurable current DQ-, DQ+: 100 mA                                                                                                                                        |
| Sampling Duration      | 5 ms +/- 1 ms (DI5, DI6) - discrete input<br>5 ms +/- 0.1 ms (AI1, AI2, AI3) - analog input<br>10 ms +/- 1 ms (AO1) - analog output<br>2 ms +/- 0.5 ms (DI1...DI4) - discrete input                                                                                                                                                                                                                            |
| Accuracy               | +/- 1 % AO1, AO2 for a temperature variation 60 °C analog output<br>+/- 0.6 % AI1, AI2, AI3 for a temperature variation 60 °C analog input                                                                                                                                                                                                                                                                     |
| Linearity Error        | AO1, AO2: +/- 0.2 % for analog output<br>AI1, AI2, AI3: +/- 0.15 % of maximum value for analog input                                                                                                                                                                                                                                                                                                           |
| Relay Output Number    | 3                                                                                                                                                                                                                                                                                                                                                                                                              |
| Relay Output Type      | Configurable relay logic R2: sequence relay NO electrical durability 100000 cycles<br>Configurable relay logic R3: sequence relay NO electrical durability 100000 cycles<br>Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles                                                                                                                                                 |

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Refresh Time                               | Relay output (R1, R2, R3): 5 ms (+/- 0.5 ms)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Minimum Switching Current                  | Relay output R1, R2, R3: 5 mA at 24 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Maximum Switching Current                  | Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 30 V DC<br>Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC<br>Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 250 V AC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Isolation                                  | Between power and control terminals                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Maximum Output Frequency                   | 500 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Maximum Input Current                      | 97.2 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Variable Speed Drive Application Selection | Food and beverage processing other application<br>Mining mineral and metal fan<br>Mining mineral and metal pump<br>Oil and gas fan<br>Water and waste water other application<br>Building - HVAC screw compressor<br>Food and beverage processing pump<br>Food and beverage processing fan<br>Food and beverage processing atomization<br>Oil and gas electro submersible pump (ESP)<br>Oil and gas water injection pump<br>Oil and gas jet fuel pump<br>Oil and gas compressor for refinery<br>Water and waste water centrifuge pump<br>Water and waste water positive displacement pump<br>Water and waste water electro submersible pump (ESP)<br>Water and waste water screw pump<br>Water and waste water lobe compressor<br>Water and waste water screw compressor<br>Water and waste water compressor centrifugal<br>Water and waste water fan<br>Water and waste water conveyor<br>Water and waste water mixer |
| Motor Power Range Ac-3                     | 55...100 kW at 480...500 V 3 phases                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Quantity Per Set                           | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Enclosure Mounting                         | Wall mounted                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## Environment

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insulation Resistance                 | > 1 MOhm 500 V DC for 1 minute to earth                                                                                                                                                                                                                                                                                                                                                                                          |
| Noise Level                           | 69.9 dB conforming to 86/188/EEC                                                                                                                                                                                                                                                                                                                                                                                                 |
| Operating Position                    | Vertical +/- 10 degree                                                                                                                                                                                                                                                                                                                                                                                                           |
| Maximum Thdi                          | <48 % from 80...100 % of load conforming to IEC 61000-3-12                                                                                                                                                                                                                                                                                                                                                                       |
| Electromagnetic Compatibility         | Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3<br>Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4<br>1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5<br>Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6<br>Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 |
| Pollution Degree                      | 2 conforming to IEC 61800-5-1                                                                                                                                                                                                                                                                                                                                                                                                    |
| Vibration Resistance                  | 1 gn (f= 13...200 Hz) conforming to IEC 60068-2-6<br>1.5 mm peak to peak (f= 2...13 Hz) conforming to IEC 60068-2-6                                                                                                                                                                                                                                                                                                              |
| Shock Resistance                      | 15 gn for 11 ms conforming to IEC 60068-2-27                                                                                                                                                                                                                                                                                                                                                                                     |
| Relative Humidity                     | 5...95 % without condensation conforming to IEC 60068-2-3                                                                                                                                                                                                                                                                                                                                                                        |
| Ambient Air Temperature For Operation | 40...50 °C (with derating factor)<br>-15...40 °C (without derating)                                                                                                                                                                                                                                                                                                                                                              |
| Ambient Air Temperature For Storage   | -40...70 °C                                                                                                                                                                                                                                                                                                                                                                                                                      |

|                        |                                                                                                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Altitude     | 1000...4800 m with current derating 1 % per 100 m<br><= 1000 m without derating                                                                                                |
| Product Certifications | UL<br>CSA<br>ATEX zone 2/22<br>TÜV<br>DNV-GL                                                                                                                                   |
| Marking                | CE                                                                                                                                                                             |
| Standards              | IEC 61800-3<br>IEC 61800-3 environment 1 category C2<br>EN/IEC 61800-3 environment 2 category C3<br>IEC 61800-5-1<br>IEC 61000-3-12<br>IEC 60721-3<br>IEC 61508<br>IEC 13849-1 |
| Overvoltage Category   | III                                                                                                                                                                            |
| Regulation Loop        | Adjustable PID regulator                                                                                                                                                       |
| Noise Level            | 69.9 dB                                                                                                                                                                        |
| Pollution Degree       | 3                                                                                                                                                                              |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type Of Package 1       | PCE      |
| Number Of Units In Package 1 | 1        |
| Package 1 Height             | 69.0 cm  |
| Package 1 Width              | 48.0 cm  |
| Package 1 Length             | 144.0 cm |
| Package 1 Weight             | 104.8 kg |

Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

Resource performance

 Upgraded Components Available

Well-being performance

 Mercury Free

 Rohs Exemption Information   [Yes](#)

Certifications & Standards


|                          |                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Reach Regulation         | <a href="#">REACH Declaration</a>                                                                                           |
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope)                                                                  |
| China Rohs Regulation    | <a href="#">China RoHS declaration</a>                                                                                      |
| Environmental Disclosure | <a href="#">Product Environmental Profile</a>                                                                               |
| Weee                     | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile      | <a href="#">End of Life Information</a>                                                                                     |

Dimensions Drawings


Dimensions

---

Front and Left Views

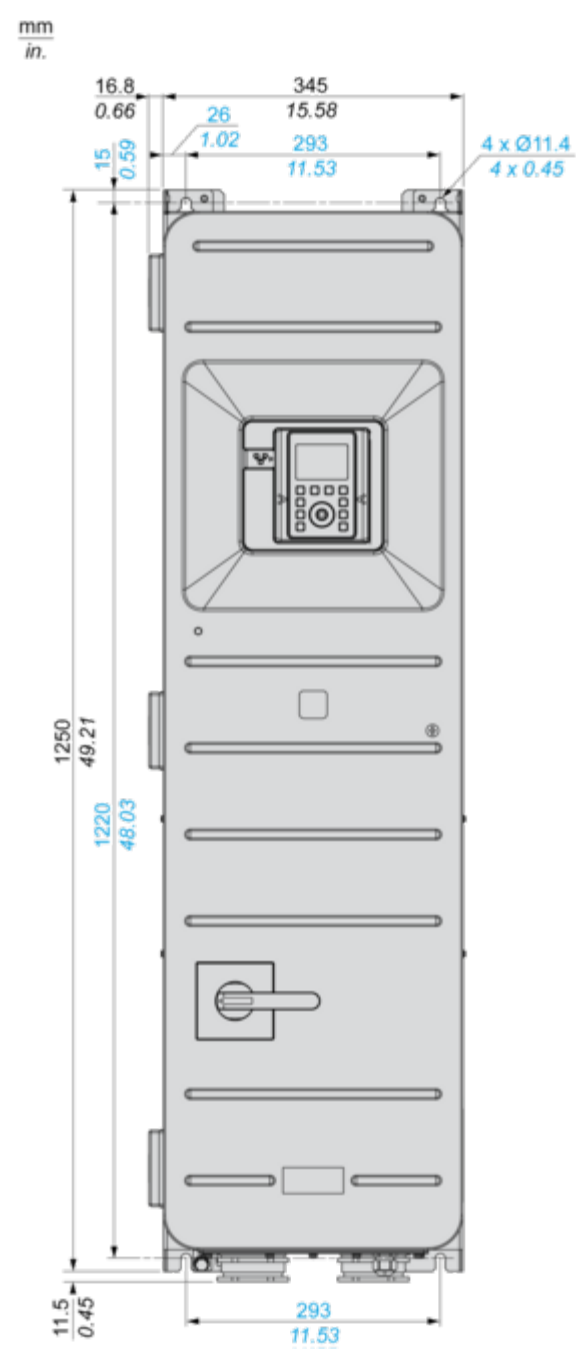


mm  
in.

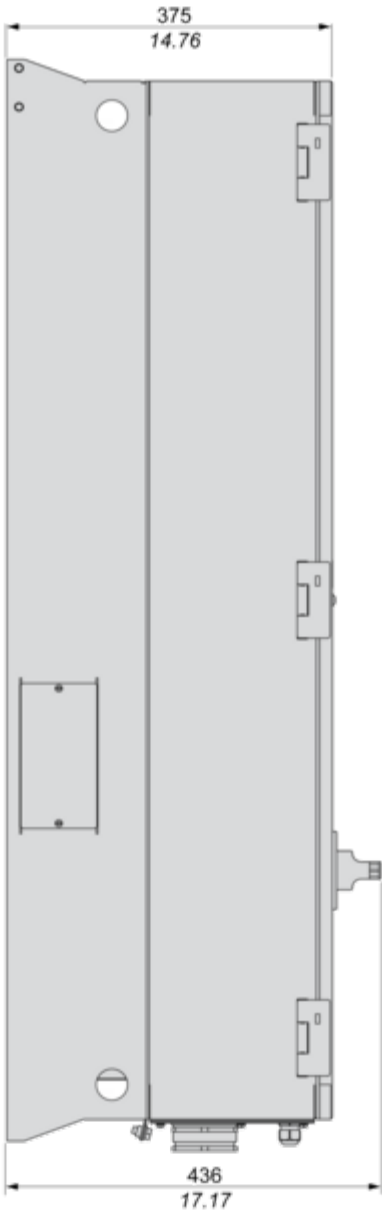

Mounting and Clearance

Clearances

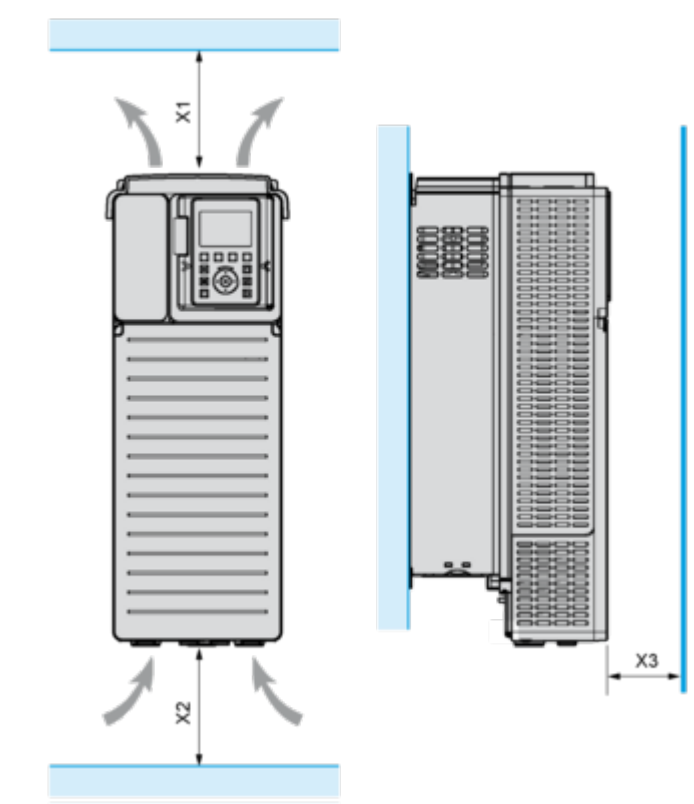


| X1                  | X2                  | X3                 |
|---------------------|---------------------|--------------------|
| ≥ 100 mm (3.94 in.) | ≥ 100 mm (3.94 in.) | ≥ 10 mm (0.39 in.) |

## Connections and Schema

### Three-Phase Power Supply with Upstream Breaking via Line Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

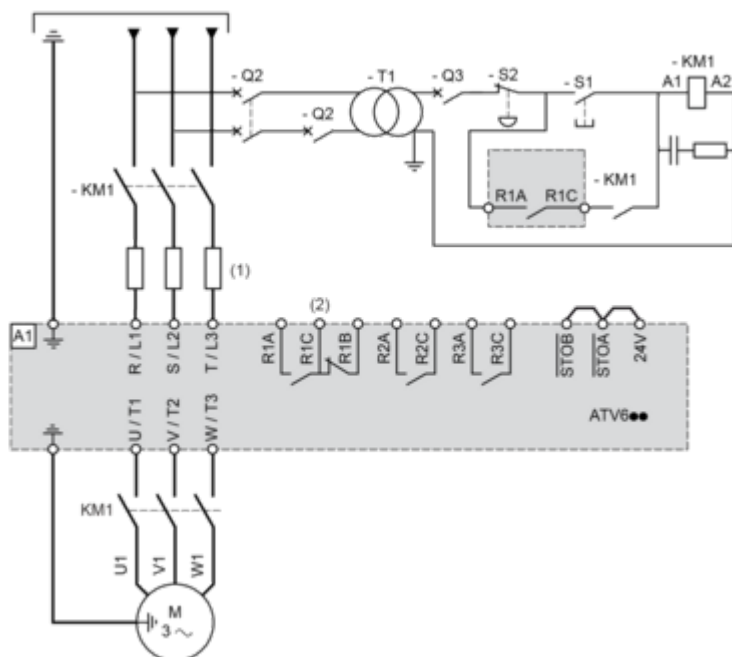

(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.

**A1 : Drive**

**KM1** : Line Contactor


**Q2, Q3** : Circuit breakers

**S1, S2** : Pushbuttons

**T1** : Transformer for control part


Three-Phase Power Supply with Downstream Breaking via Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

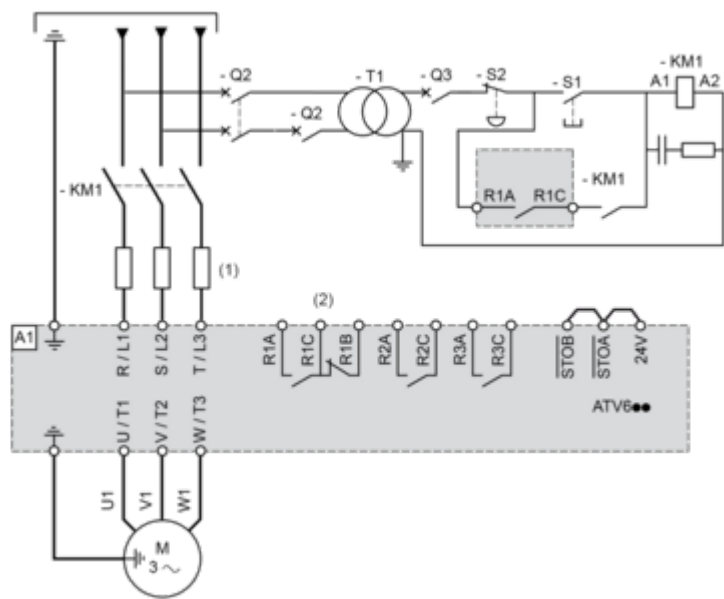

- (1) Line choke if used
  - (2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.
- A1 : Drive
- KM1 : Contactor


Control Block Wiring Diagram

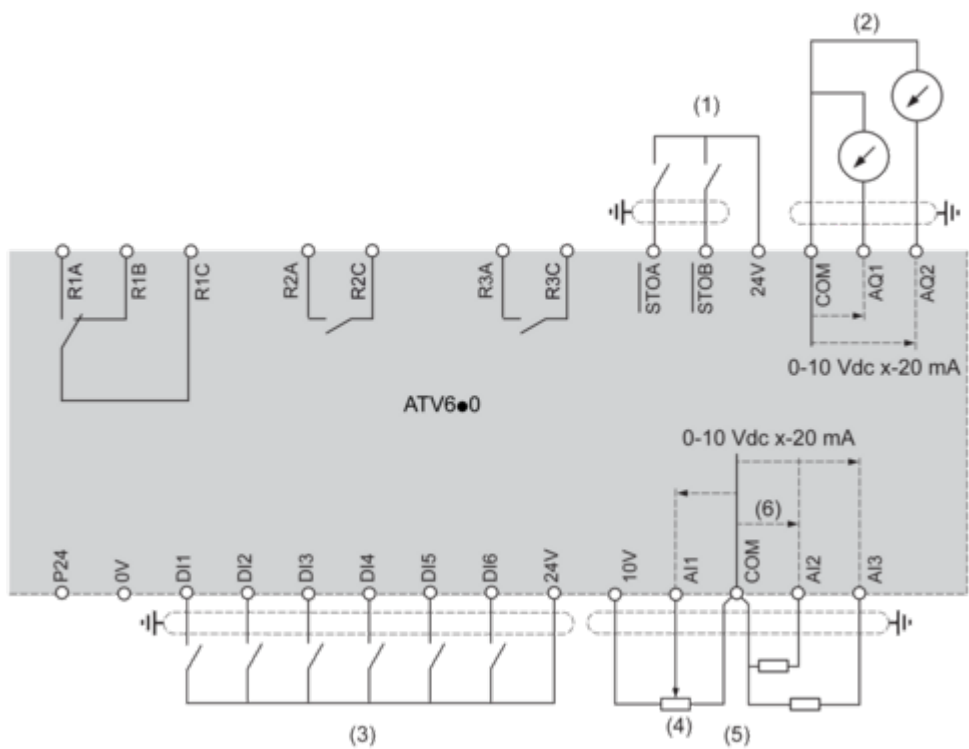

- (1) Safe Torque Off
- (2) Analog Output
- (3) Digital Input
- (4) Reference potentiometer
- (5) Analog Input
- R1A, R1B, R1C : Fault relay
- R2A, R2C : Sequence relay
- R3A, R3C : Sequence relay

Sensor Connection

It is possible to connect either 1 or 3 sensors on terminals AI2 or AI3.




### Sink / Source Switch Configuration


The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.


#### Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs

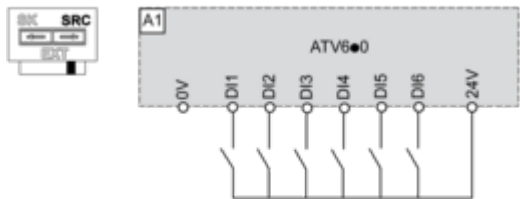


#### Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs

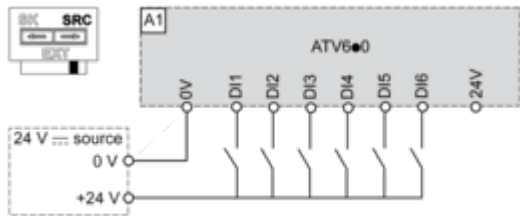

#### Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs

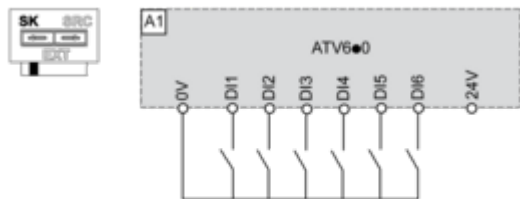

#### Switch Set to EXT Position Using an External Power Supply for the DIs

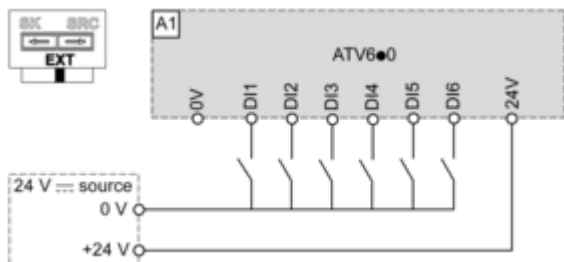

Performance Curves

Derating Curves

