

# Product datasheet

Specifications



## Compact Drive System ATV660 - 355/280kW - 400 V - IP23

ATV660C35Q4X1

**Price: 892,029.72 ZAR**

### Main

|                                     |  |
|-------------------------------------|--|
| Range Of Product                    | Altivar Process ATV600   |
| Product Or Component Type           | Variable speed drive   |
| Product Specific Application        | Process and utilities  |
| Device Short Name                   | ATV660   |
| Product Destination                 | Asynchronous motors<br>Synchronous motors  |
| Assembly Style                      | In floor-standing enclosure compact version  |
| Provided Equipment                  | Enclosure Spacial SF<br>Graphical operating panel in the enclosure door<br>Frequency inverter<br>Main switch<br>Line choke<br>Terminal block main supply<br>Terminal block motor |
| Cable Entry                         | Bottom   |
| Colour Of Enclosure                 | Light grey (RAL 7035)  |
| Ip Degree Of Protection             | IP23 conforming to IEC 61800-5-1   |
| Type Of Cooling                     | Forced convection  |
| [Us] Rated Supply Voltage           | 380...415 V - 10...6 %   |
| Supply Frequency                    | 50/60 Hz +/-5 %  |
| Network Number Of Phases            | 3 phases   |
| Overvoltage Category                | III  |
| Asynchronous Motor Control Profile  | Variable torque standard<br>Constant torque standard<br>Optimized torque mode  |
| Synchronous Motor Control Profile   | Permanent magnet motor   |
| Output Voltage                      | <= power supply voltage  |
| Permissible Temporary Current Boost | 1.1 x In during 60 s (normal duty)<br>1.5 x In during 60 s (heavy duty)  |
| Nominal Switching Frequency         | 2.5 kHz  |
| Switching Frequency                 | 2...8 kHz adjustable with derating factor  |
| Speed Drive Output Frequency        | 0.1...500 Hz   |
| Motor Power Kw                      | 355 kW for normal duty<br>280 kW for heavy duty  |
| Continuous Output Current           | 660 A at 2.5 kHz for normal duty<br>520 A at 2.5 kHz for heavy duty  |

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

|  |   |
|--|---|
| <b>Maximum Transient Current</b>             | 726 A during 60 s per 10 min (normal duty)<br>780 A during 60 s per 10 min (heavy duty)   |
| <b>Line Current</b>                          | 611 A at 400 V (normal duty)<br>489 A at 400 V (heavy duty)   |
| <b>Apparent Power</b>                        | 423 kVA at 400 V (normal duty)<br>339 kVA at 400 V (heavy duty)   |
| <b>Maximum Thdi</b>                          | <46 % full load conforming to IEC 61000-3-12  |
| <b>Short-Circuit Protection</b>              | Internal: 315.0 A 3 aR fuse<br>Upstream: 800.0 A gG fuse (normal duty)<br>Upstream: 630.0 A gG fuse (heavy duty)  |
| <b>Energy Efficiency Ratio</b>               | 0.98  |
| <b>Power Dissipation In W</b>                | 8530 W, total (normal duty)<br>6410 W, total (heavy duty)<br>930 W, control part (normal duty)<br>650 W, control part (heavy duty)  |
| <b>Volume Of Cooling Air</b>                 | 1740 m3/h for power<br>280 m3/h for control   |
| <b>Noise Level</b>                           | 71 dB conforming to 86/188/EEC - physical agents (noise) directive  |
| <b>Prospective Line Isc</b>                  | 50 kA for 100 ms  |
| <b>Electrical Connection</b>                 | Removable screw terminals, clamping capacity: 0.5...1.5 mm <sup>2</sup> for control<br>M12 bar for main supply<br>M12 bar for motor   |
| <b>Motor Recommended Cable Cross Section</b> | 3 x (3 x 150 mm <sup>2</sup> ) (normal duty)<br>4 x (3 x 95 mm <sup>2</sup> ) (normal duty)<br>2 x (3 x 185 mm <sup>2</sup> ) (heavy duty)<br>3 x (3 x 120 mm <sup>2</sup> ) (heavy duty)   |
| <b>Width</b>                                 | 800 mm  |
| <b>Height</b>                                | 2150 mm   |
| <b>Depth</b>                                 | 664 mm  |
| <b>Net Weight</b>                            | 650 kg  |
| <b>Number Of Preset Speeds</b>               | 16 preset speeds  |
| <b>Communication Port Protocol</b>           | Modbus serial<br>EtherNet/IP<br>Modbus TCP  |
| <b>Option Card</b>                           | Slot A: communication module, Profibus DP V1<br>Slot A: communication module, PROFINET<br>Slot A: communication module, DeviceNet<br>Slot A: communication module, Modbus TCP/EtherNet/IP<br>Slot A: communication module, CANopen daisy chain RJ45<br>Slot A: communication module, CANopen SUB-D 9<br>Slot A: communication module, CANopen screw terminals<br>Slot A/slot B: digital and analog I/O extension module<br>Slot A/slot B: output relay extension module |
| <b>Safety Function</b>                       | STO (safe torque off), level SIL 3 for <= 100 ms  |
| <b>Emc Filter</b>                            | Integrated conforming to EN/IEC 61800-3, category C3, shielded cable with 150 m<br>Integrated conforming to EN/IEC 61800-3, category C4, unshielded cable with 250 m  |

## Complementary

|  |   |
|--|---|
| <b>Motor Slip Compensation</b>             | Can be suppressed<br>Adjustable<br>Not available in permanent magnet motor law<br>Automatic whatever the load |
| <b>Acceleration And Deceleration Ramps</b> | Linear adjustable separately from 0.01 to 9000 s<br>S, U or customized  |
| <b>Braking To Standstill</b>               | By DC injection   |

|                               |  |
|-------------------------------|--|
| <b>Protection Type</b>        | Motor: thermal protection<br>Motor: safe torque off<br>Motor: motor phase break<br>Drive: thermal protection<br>Drive: safe torque off<br>Drive: overheating<br>Drive: overcurrent (between output phases and earth)<br>Drive: overload (output)<br>Drive: short-circuit protection<br>Drive: motor phase break<br>Drive: overvoltage (DC bus)<br>Drive: line supply overvoltage<br>Drive: line supply undervoltage<br>Drive: line supply phase loss<br>Drive: overspeed<br>Drive: break on the control circuit<br>Drive: short-circuit protection with semi-conductor fuse (main supply)<br>Drive: fan monitoring |
| <b>Frequency Resolution</b>   | Display unit: 0.1 Hz<br>Analog input: 0.012/50 Hz  |
| <b>Connector Type</b>         | RJ45 (on the control block) for Modbus serial<br>RJ45 (on the control block) for Ethernet IP/Modbus TCP  |
| <b>Physical Interface</b>     | 2-wire RS 485 for Modbus serial  |
| <b>Transmission Frame</b>     | RTU for Modbus serial  |
| <b>Transmission Rate</b>      | 10/100 Mbit/s for Ethernet IP/Modbus TCP<br>4.8, 9.6, 19.2, 38.4 kbit/s for Modbus serial  |
| <b>Exchange Mode</b>          | Half duplex, full duplex, autonegotiation Ethernet IP/Modbus TCP   |
| <b>Data Format</b>            | 8 bits, configurable odd, even or no parity for Modbus serial  |
| <b>Type Of Polarization</b>   | No impedance for Modbus serial   |
| <b>Number Of Addresses</b>    | 1...247 for Modbus serial  |
| <b>Method Of Access</b>       | Slave Modbus TCP   |
| <b>Supply</b>                 | External supply for digital inputs: 24 V DC (10...30 V), <1.25 mA, protection type: overload and short-circuit protection<br>Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection<br>Internal supply for digital inputs and STO: 24 V DC (21...27 V), <200 mA, protection type: overload and short-circuit protection   |
| <b>Local Signalling</b>       | LCD display unit front door operation function, status and configuration   |
| <b>Analogue Input Number</b>  | 3  |
| <b>Analogue Input Type</b>    | AI1, AI2, AI3 software-configurable voltage: 0...10 V DC, impedance: 30 kOhm, resolution 12 bits<br>AI1, AI2, AI3 software-configurable current: 0...20 mA, impedance: 250 Ohm, resolution 12 bits   |
| <b>Discrete Input Number</b>  | 8  |
| <b>Discrete Input Type</b>    | DI1...DI6 programmable, 24 V DC (<= 30 V), impedance: 3.5 kOhm<br>DI5, DI6 programmable as pulse input: 0...30 kHz, 24 V DC (<= 30 V)<br>STOA, STOB safe torque off, 24 V DC (<= 30 V), impedance: > 2.2 kOhm  |
| <b>Input Compatibility</b>    | DI1...DI6: discrete input level 1 PLC conforming to EN/IEC 61131-2<br>DI5, DI6: discrete input level 1 PLC conforming to IEC 65A-68<br>STOA, STOB: discrete input level 1 PLC conforming to EN/IEC 61131-2   |
| <b>Discrete Input Logic</b>   | Positive logic (source) (DI1...DI6), < 5 V (state 0), > 11 V (state 1)<br>Negative logic (sink) (DI1...DI6), > 16 V (state 0), < 10 V (state 1)<br>Positive logic (source) (DI5, DI6), < 0.6 V (state 0), > 2.5 V (state 1)<br>Positive logic (source) (STOA, STOB), < 5 V (state 0), > 11 V (state 1)   |
| <b>Analogue Output Number</b> | 2  |
| <b>Analogue Output Type</b>   | Software-configurable voltage AQ1, AQ2: 0...10 V DC impedance 470 Ohm, resolution 10 bits<br>Software-configurable current AQ1, AQ2: 0...20 mA, resolution 10 bits   |

|                                  |  |
|----------------------------------|--|
| <b>Sampling Duration</b>         | 2 ms +/- 0.5 ms (DI1...DI4) - discrete input<br>5 ms +/- 1 ms (DI5, DI6) - discrete input<br>5 ms +/- 1 ms (AI1, AI2, AI3) - analog input<br>10 ms +/- 1 ms (AQ1, AQ2) - analog output   |
| <b>Accuracy</b>                  | +/- 0.6 % AI1, AI2, AI3 for a temperature variation 60 °C analog input<br>+/- 1 % AQ1, AQ2 for a temperature variation 60 °C analog output   |
| <b>Linearity Error</b>           | AI1, AI2, AI3: +/- 0.15 % of maximum value for analog input<br>AQ1, AQ2: +/- 0.2 % for analog output   |
| <b>Relay Output Number</b>       | 3  |
| <b>Relay Output Type</b>         | Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles<br>Configurable relay logic R2: sequence relay NO electrical durability 100000 cycles<br>Configurable relay logic R3: sequence relay NO electrical durability 100000 cycles   |
| <b>Refresh Time</b>              | Relay output (R1, R2, R3): 5 ms (+/- 0.5 ms)   |
| <b>Minimum Switching Current</b> | Relay output R1, R2, R3: 5 mA at 24 V DC   |
| <b>Maximum Switching Current</b> | Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 250 V AC<br>Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 30 V DC<br>Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC |
| <b>Isolation</b>                 | Between power and control terminals  |

## Environment

|  |  |
|--|--|
| <b>Insulation Resistance</b>                 | > 1 MOhm 500 V DC for 1 minute to earth  |
| <b>Operating Position</b>                    | Vertical +/- 10 degree   |
| <b>Electromagnetic Compatibility</b>         | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2<br>Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3<br>Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4<br>1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5<br>Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6   |
| <b>Pollution Degree</b>                      | 2 conforming to EN/IEC 61800-5-1   |
| <b>Vibration Resistance</b>                  | 1.5 mm peak to peak (f= 3...10 Hz) conforming to IEC 60068-2-6<br>0.6 gn (f= 10...200 Hz) conforming to IEC 60068-2-6<br>3M3 conforming to IEC 60721-3-3   |
| <b>Shock Resistance</b>                      | 4 gn for 11 ms conforming to IEC 60068-2-27<br>3M2 conforming to IEC 60721-3-3   |
| <b>Relative Humidity</b>                     | 5...95 % without condensation conforming to IEC 60068-2-3  |
| <b>Ambient Air Temperature For Operation</b> | -10...0 °C without derating (with option enclosure heating)<br>0...40 °C without derating<br>40...50 °C with derating factor   |
| <b>Ambient Air Temperature For Storage</b>   | -25...70 °C  |
| <b>Operating Altitude</b>                    | < 1000 m without derating<br>1000...2000 m with current derating 1 % per 100 m<br>2000...3800 m with current derating 1 % per 100 m for TT earthing system<br>2000...3800 m with current derating 1 % per 100 m for TN earthing system<br>2000...3800 m with current derating 1 % per 100 m for IT earthing system<br>3800...4800 m with current derating 1 % per 100 m for TT earthing system<br>3800...4800 m with current derating 1 % per 100 m for TN earthing system |
| <b>Environmental Characteristic</b>          | Chemical pollution resistance class 3C3 conforming to EN/IEC 60721-3-3<br>Dust pollution resistance class 3S3 conforming to EN/IEC 60721-3-3<br>Humidity resistant class 3K3 conforming to EN/IEC 60721-3-3  |
| <b>Standards</b>                             | EN/IEC 60204-1<br>EN/IEC 61800-2<br>EN/IEC 61800-3<br>EN/IEC 61800-5-1   |

---

|                               |                       |
|-------------------------------|-----------------------|
| <b>Product Certifications</b> | ATEX<br>EAC<br>C-Tick |
|-------------------------------|-----------------------|

---

|                |    |
|----------------|----|
| <b>Marking</b> | CE |
|----------------|----|

---

## Packing Units

---

|                               |     |
|-------------------------------|-----|
| <b>Unit Type Of Package 1</b> | PCE |
|-------------------------------|-----|

---

|                                     |   |
|-------------------------------------|---|
| <b>Number Of Units In Package 1</b> | 1 |
|-------------------------------------|---|

---

|                         |        |
|-------------------------|--------|
| <b>Package 1 Height</b> | 215 cm |
|-------------------------|--------|

---

|                        |         |
|------------------------|---------|
| <b>Package 1 Width</b> | 66.9 cm |
|------------------------|---------|

---

|                         |       |
|-------------------------|-------|
| <b>Package 1 Length</b> | 80 cm |
|-------------------------|-------|

---

|                         |        |
|-------------------------|--------|
| <b>Package 1 Weight</b> | 700 kg |
|-------------------------|--------|

---

|                               |     |
|-------------------------------|-----|
| <b>Unit Type Of Package 2</b> | CAR |
|-------------------------------|-----|

---

|                                     |   |
|-------------------------------------|---|
| <b>Number Of Units In Package 2</b> | 1 |
|-------------------------------------|---|

---

|                         |        |
|-------------------------|--------|
| <b>Package 2 Height</b> | 230 cm |
|-------------------------|--------|

---

|                        |       |
|------------------------|-------|
| <b>Package 2 Width</b> | 80 cm |
|------------------------|-------|

---

|                         |       |
|-------------------------|-------|
| <b>Package 2 Length</b> | 95 cm |
|-------------------------|-------|

---

|                         |        |
|-------------------------|--------|
| <b>Package 2 Weight</b> | 670 kg |
|-------------------------|--------|

---

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Take-back

## Resource performance

✓ Take-Back Program Available

---

## Well-being performance

✓ Mercury Free

---

✓ Rohs Exemption Information Yes

---

Reach Regulation [REACH Declaration](#)

---

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)

---

China Rohs Regulation [China RoHS declaration](#)

---

Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


---

Dimensions Drawings

Dimensions

---

Right and Front Views

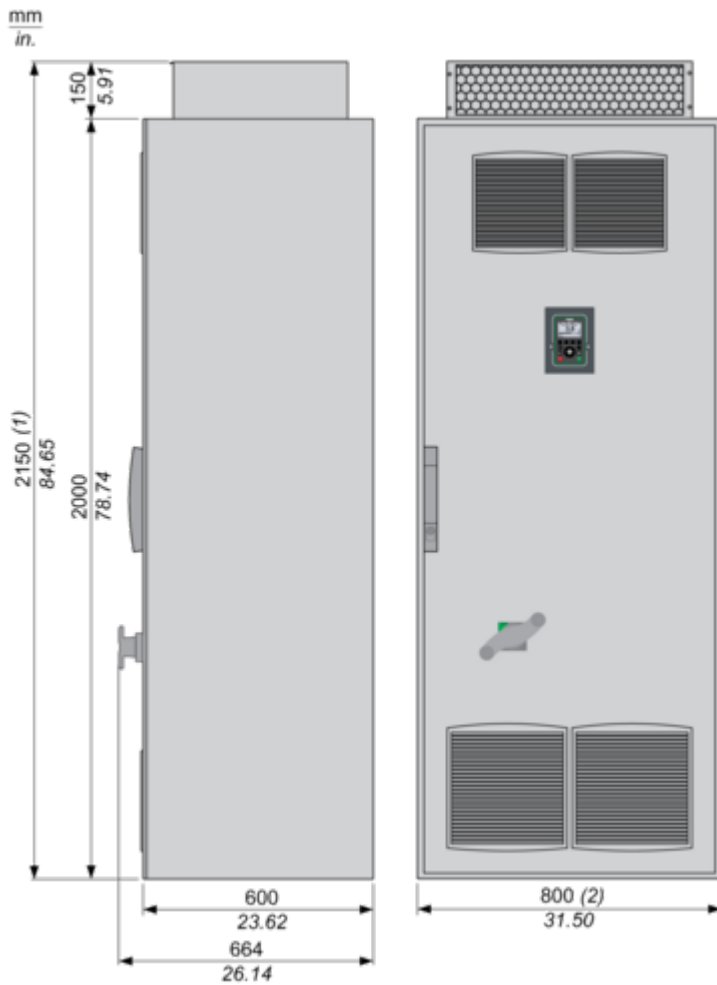

(1) + 200 mm / 7.87 in. with option enclosure plinth or increased protection degree IP54  
(2) + 600 mm / 23.62 in. with option connection enclosure cable from top/bottom

Mounting and Clearance

Mounting and Clearance


---



(1) Air inflow temperature: -10...+50 °C (below 0 °C with option enclosure heating, above +40 °C with derating).

Connections and Schema

Typical Wiring Diagram of the Frequency Inverter

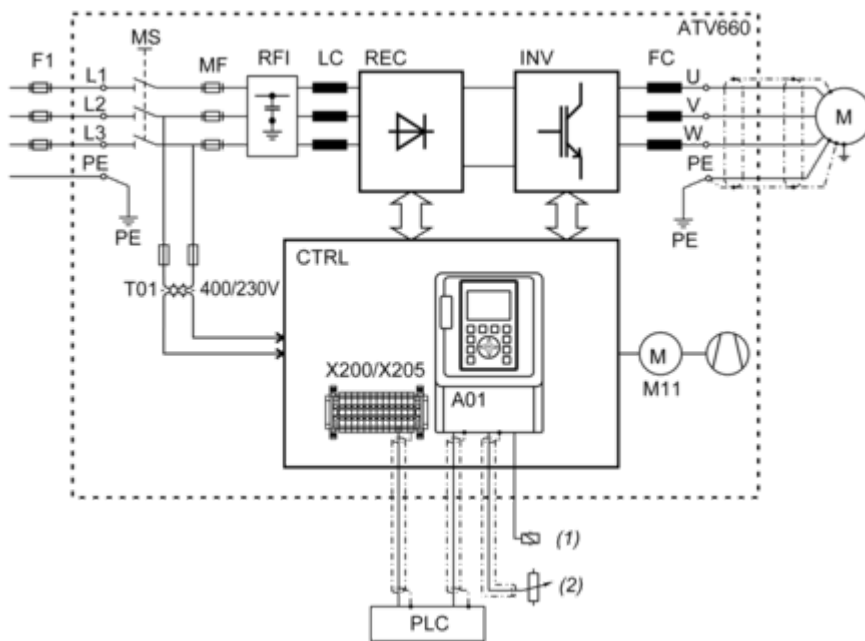

F1 External pre-fuse or circuit breaker

MS Built-in main switch

T01 Control transformer 400 / 230 V AC

MF aR fuses

RFI Built-in RFI filter

LC Line reactor choke

REC Rectifier module

INV Inverter module

FC dv/dt filter (from 355 kW the dv/dt filter choke 150 m is built-in as standard)

CTRL Control panel

A01 Control terminals at the control block

X200 / X205 Control terminals at the control panel (depending on the chosen options)


M11 Fan in enclosure door

(1) Relay control

(2) Reference value

Structure of the Control Block

---

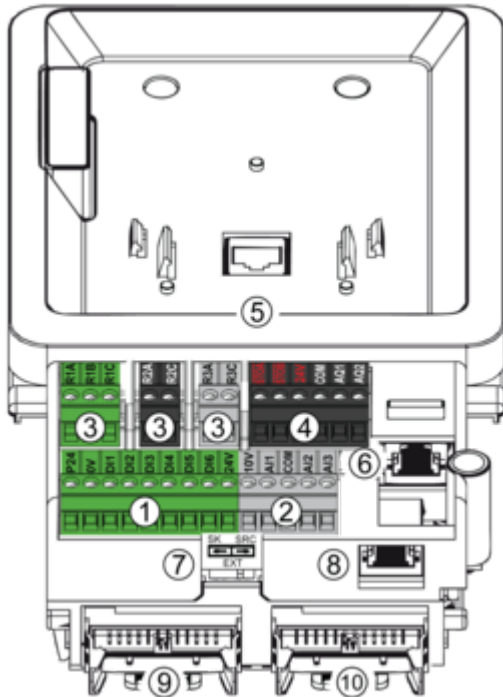

- (1) Digital inputs
- (2) Analog inputs
- (3) Relay outputs
- (4) STO (Safe Torque Off) and analog outputs
- (5) RJ45 port for door mounting kit of the graphic keypad
- (6) RJ45 port for Ethernet IP or Modbus TCP
- (7) Sink-Ext-Source selector switch (see switch configuration below)
- (8) RJ45 port for serial Modbus
- (9) Slot for I/O expansion card
- (10) Slot for fieldbus or I/O expansion card


Control Block Wiring Diagram



- (1) Safe Torque Off
- (2) Analog Output
- (3) Digital Input
- (4) Reference potentiometer
- (5) Analog Input
- R1A, R1B, R1C : Fault relay
- R2A, R2C : Sequence relay
- R3A, R3C : Sequence relay

Sensor Connection

It is possible to connect either 1 or 3 sensors on terminals AI2 or AI3.




**Sink / Source Switch Configuration**


The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.


**Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs**

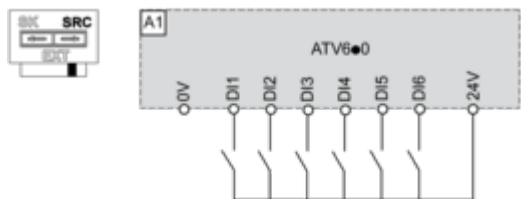


**Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs**

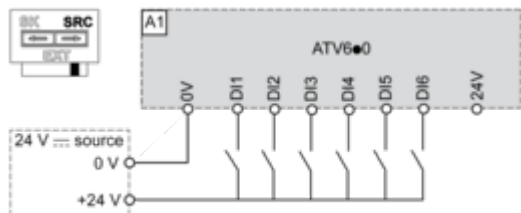

**Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs**

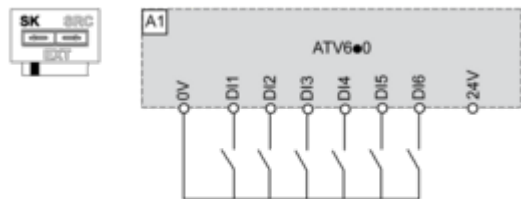

**Switch Set to EXT Position Using an External Power Supply for the DIs**

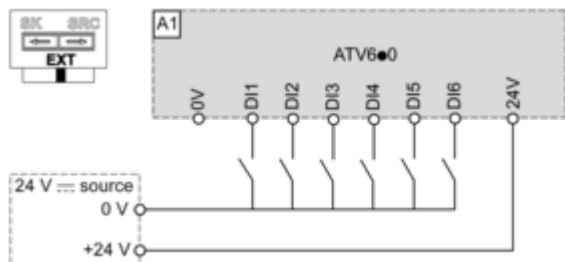


Performance Curves

Derating Curves


---

Normal Duty

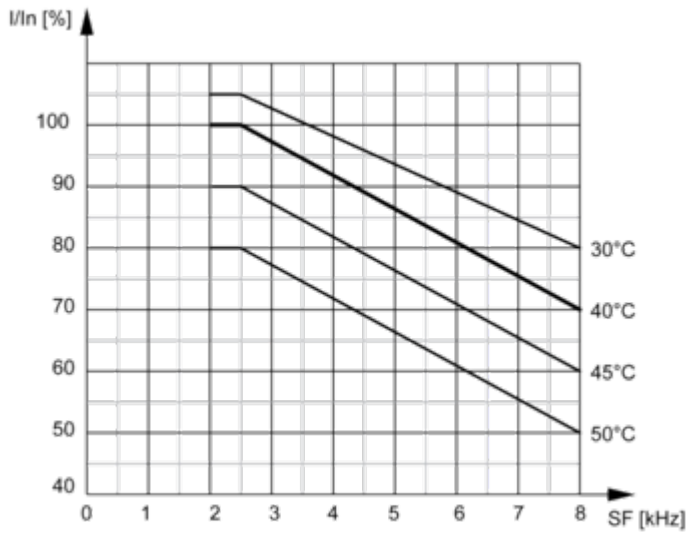

In : Nominal Drive Current  
 SF : Switching Frequency

Heavy Duty

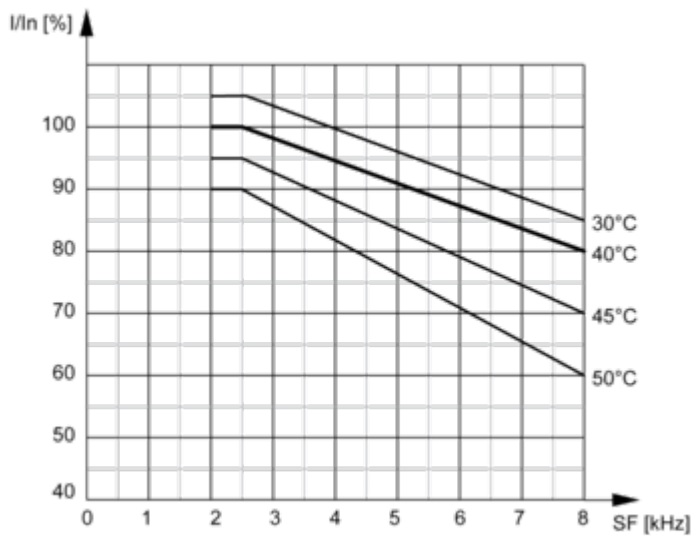

In : Nominal Drive Current  
 SF : Switching Frequency