

Product datasheet

Specifications



discrete input X80 - 16 channel
isolated supervised - 200..240 V
AC

BMXDAI1615

Price: 7,434.46 ZAR

Main

Range Of Product	Modicon X80
Product Or Component Type	Discrete input module
Discrete Input Number	16
Discrete Input Type	Isolated
Input Type	Capacitive
Discrete Input Voltage	200...240 V AC
Discrete Input Current	3 mA

Complementary

Input Compatibility	2-wire proximity sensor conforming to IEC 60947-5-2 2-wire proximity sensor conforming to IEC 61131-2 Type 1
Network Frequency	50/60 Hz
Network Frequency Limits	47...63 Hz
Sensor Power Supply	170...264 V
Current State 1 Guaranteed	>= 3 mA
Current State 0 Guaranteed	<= 2 mA
Input Impedance	28000 Ohm
Insulation Resistance	> 10 MOhm 500 V DC
Power Dissipation In W	5 W
Ac Activation Response Time	10 ms
Ac Deactivation Response Time	20 ms
Typical Current Consumption	76 mA at 3.3 V DC
Mtbf Reliability	3700000 H
Protection Type	1 external fuse per group of channel0.25 A fast blow
Voltage Detection Threshold	< 80 V AC sensor fault > 170 V AC sensor OK
Status Led	1 LED (green) module operating (RUN) 1 LED per channel (green) channel diagnostic 1 LED (red) module error (ERR) 1 LED (red) module I/O
Net Weight	0.157 kg

Environment

Ip Degree Of Protection	IP20
-------------------------	------

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Dielectric Strength	1780 V AC at 50/60 Hz 1 min
Vibration Resistance	3 gn
Shock Resistance	30 gn
Ambient Air Temperature For Storage	-40...85 °C
Ambient Air Temperature For Operation	0...60 °C
Relative Humidity	0...95 % at 0...60 °C without condensation
Operating Altitude	0...2000 m 2000...5000 m with derating factor

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.700 cm
Package 1 Width	18.000 cm
Package 1 Length	26.000 cm
Package 1 Weight	311.000 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	8
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	2.980 kg

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓

Mercury Free

✓

Rohs Exemption Information


Yes

Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings

Dimensions

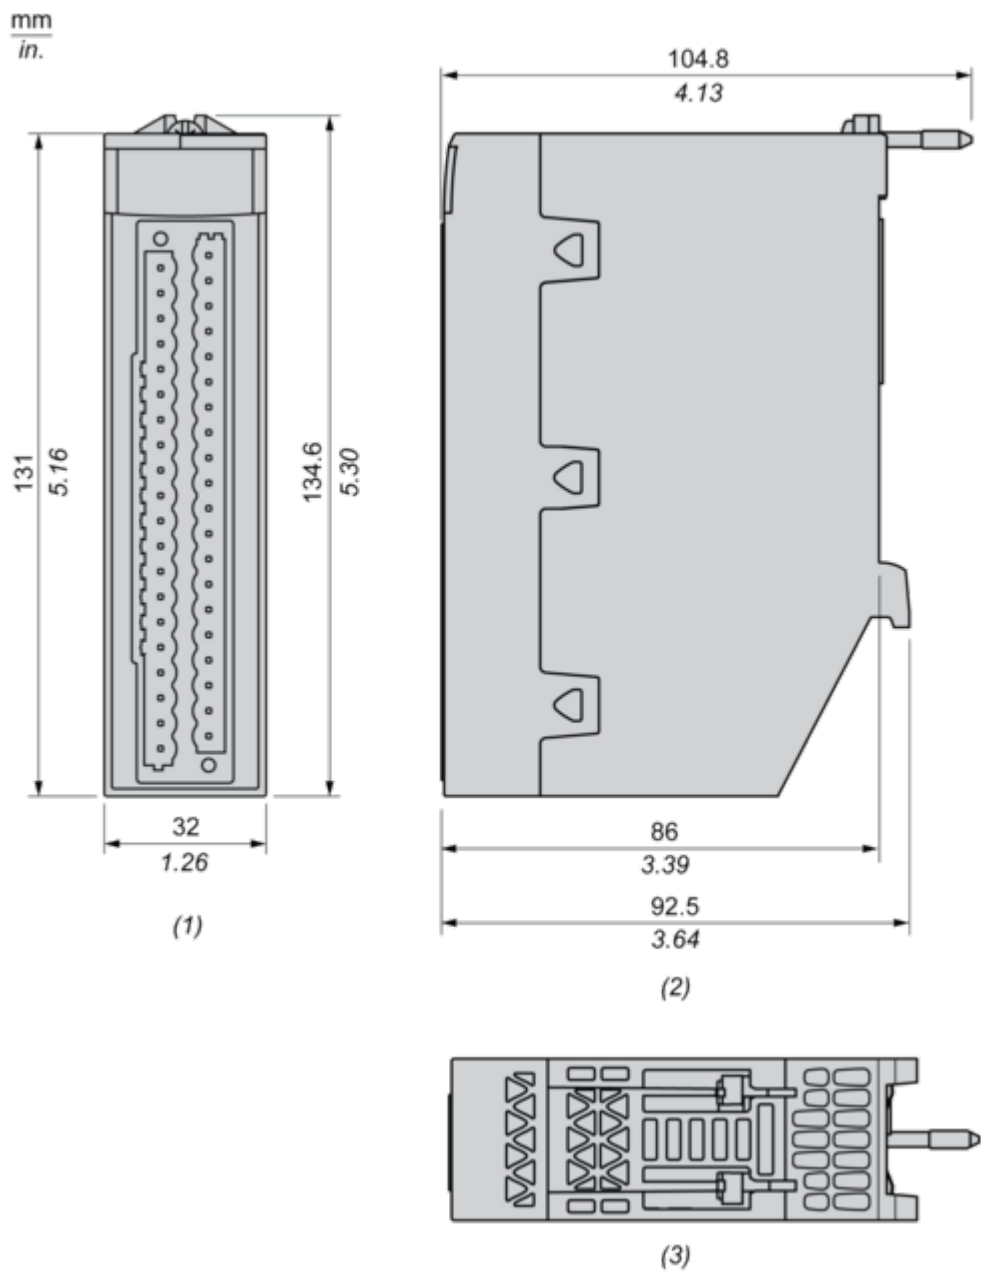


- (1) Front view
- (2) Right view
- (3) Top view

Connections and Schema


Connecting the Module

Input Circuit Diagram

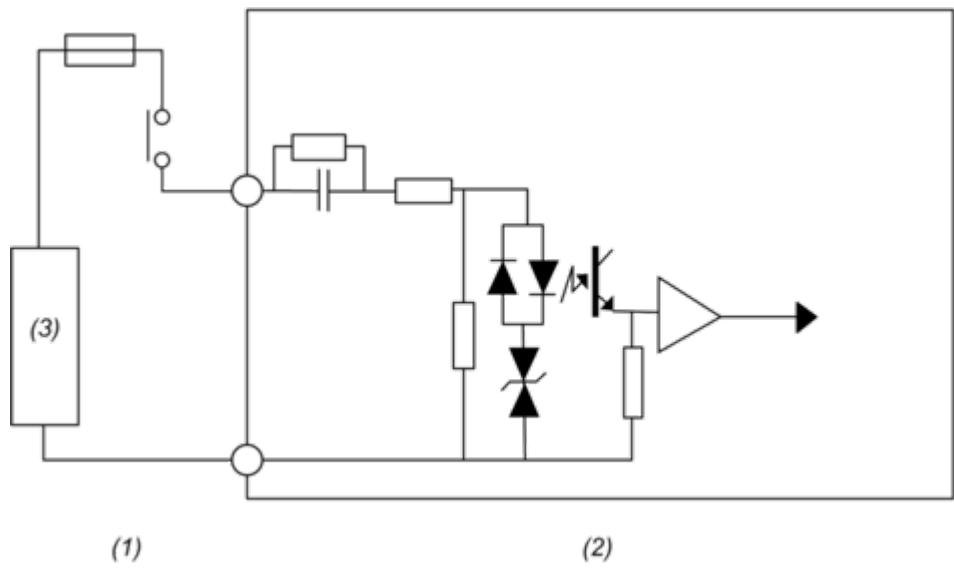

- (1) Process
- (2) Module
- (3) Power supply

Module Connection

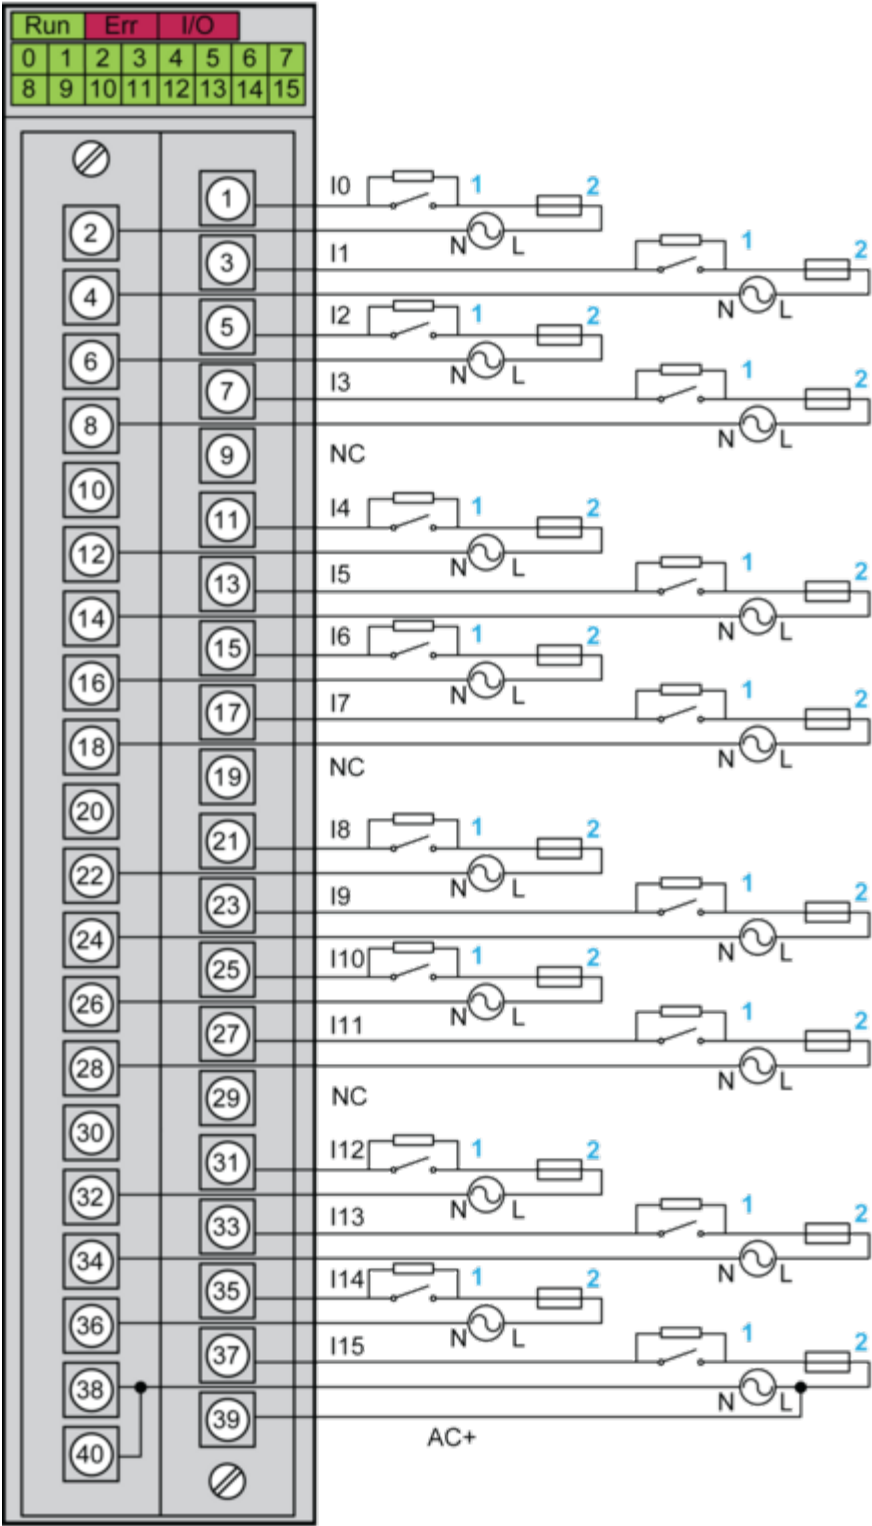

1 : External resistor for open wire detection function
2 : Fast blow fuse of 0.5A
AC+ : Input pin for IO supply monitoring function on channel 15
NC : Not connected
Power supply : 220...240 Vac
NOTE : The maximum input voltage is 264 Vrms@63 Hz. Any over voltage will damage the module.