

Product datasheet

Specifications



discrete I/O module X80 - 8 inputs
- 24 V DC - 8 outputs - relay

BMXDDM16025

Price: 9,239.47 ZAR

Main

Range Of Product	Modicon X80
Product Or Component Type	Discrete I/O module
Discrete Input Number	8
Input Type	Current sink (logic positive)
Discrete Input Voltage	24 V DC, discrete input logic: positive
Discrete Input Current	3.5 mA
Discrete Output Number	8
Discrete Output Type	Relay
Discrete Output Voltage	24 V 19...30 V DC 24...240 V 19...264 V AC
Discrete Output Current	2000 mA

Complementary

Input Compatibility	With 2-wire/3-wire proximity sensors conforming to IEC 60947-5-2 With 2-wire/3-wire proximity sensors conforming to IEC 61131-2 type 3
Sensor Power Supply	19...30 V
Current State 1 Guaranteed	>= 2 mA
Current State 0 Guaranteed	<= 1.5 mA
Input Impedance	6800 Ohm
Insulation Resistance	> 10 MOhm 500 V DC
Power Dissipation In W	3.1 W
Dc Typical Response Time	4 ms
Dc Maximum Response Time	7 ms
Response Time On Output	<= 8 ms deactivation <= 10 ms activation
Paralleling Of Inputs	No
Typical Current Consumption	79 mA at 3.3 V DC
Mtbf Reliability	940000 H
Protection Type	1 external fuse per group of input channel0.5 A fast blow reverse polarity protection on input 1 external fuse per output channel or group of output channel fast blow
Voltage Detection Threshold	< 14 V DC sensor fault > 18 V DC sensor OK
Minimum Switching Current	1 mA 5 V DC

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Maximum Switching Voltage	125 V DC 264 V AC
Mechanical Durability	20000000 cycles
Electrical Durability	AC-14: 100000 cycles at 240 VA 240 V (load factor 0.7) AC-14: 100000 cycles at 300 VA 200 V (load factor 0.7) AC-15: 100000 cycles at 120 VA 240 V (load factor 0.35) AC-15: 100000 cycles at 200 VA 200 V (load factor 0.35) DC-13: 100000 cycles at 24 W 24 V AC-14: 300000 cycles at 72 VA 240 V (load factor 0.7) AC-14: 300000 cycles at 80 VA 200 V (load factor 0.7) AC-15: 300000 cycles at 36 VA 240 V (load factor 0.35) AC-15: 300000 cycles at 60 VA 200 V (load factor 0.35) DC-13: 300000 cycles at 7.2 W 24 V
Switching Frequency	1 Hz
Status Led	1 LED (green) module operating (RUN) 1 LED per channel (green) channel diagnostic 1 LED (red) module error (ERR) 1 LED (red) module I/O
Net Weight	0.135 kg

Environment

Ip Degree Of Protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
Dielectric Strength	1500 V AC at 50/60 Hz 1 minute, primary/secondary 2830 V AC at 50/60 Hz 1 minute, output relay 500 V DC 1 minute, between group of I/O
Vibration Resistance	3 gn
Shock Resistance	30 gn
Ambient Air Temperature For Storage	-40...85 °C
Ambient Air Temperature For Operation	0...60 °C
Relative Humidity	5...95 % at 55 °C without condensation
Operating Altitude	0...2000 m 2000...5000 m with derating factor

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.100 cm
Package 1 Width	11.600 cm
Package 1 Length	11.800 cm
Package 1 Weight	159.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	2.760 kg

Contractual warranty

Warranty

18 months

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓

Mercury Free

✓

Rohs Exemption Information

Yes


Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings

Modules Mounted on Racks

Dimensions

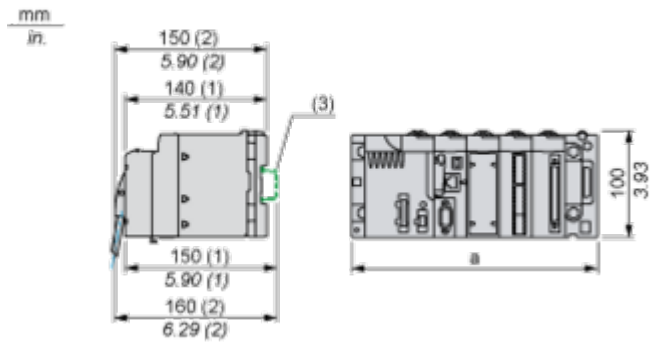


- (1) With removable terminal block (cage, screw or spring).
(2) With FCN connector.
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81


Connections and Schema

Connecting the Module


Input Circuit Diagram

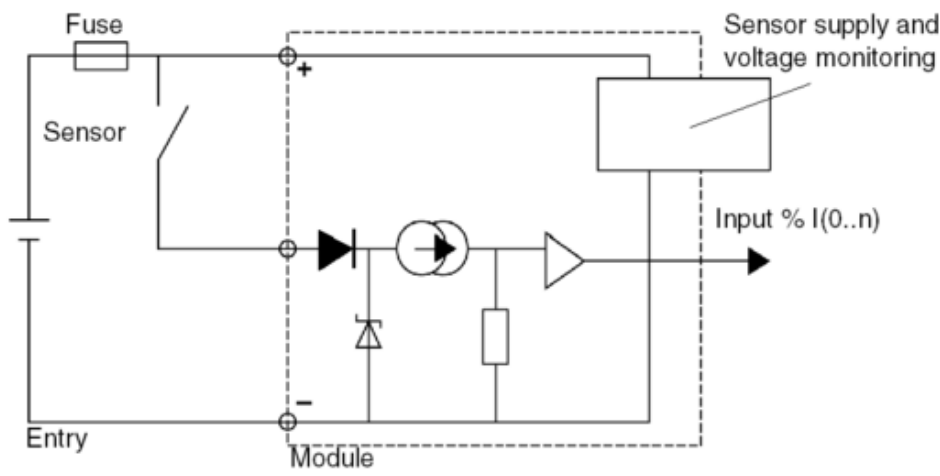

Output Circuit Diagram

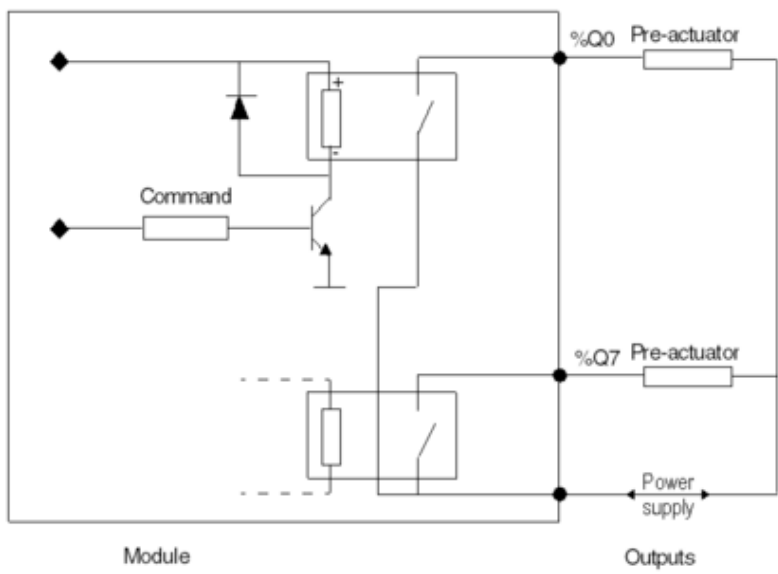

Module Connection

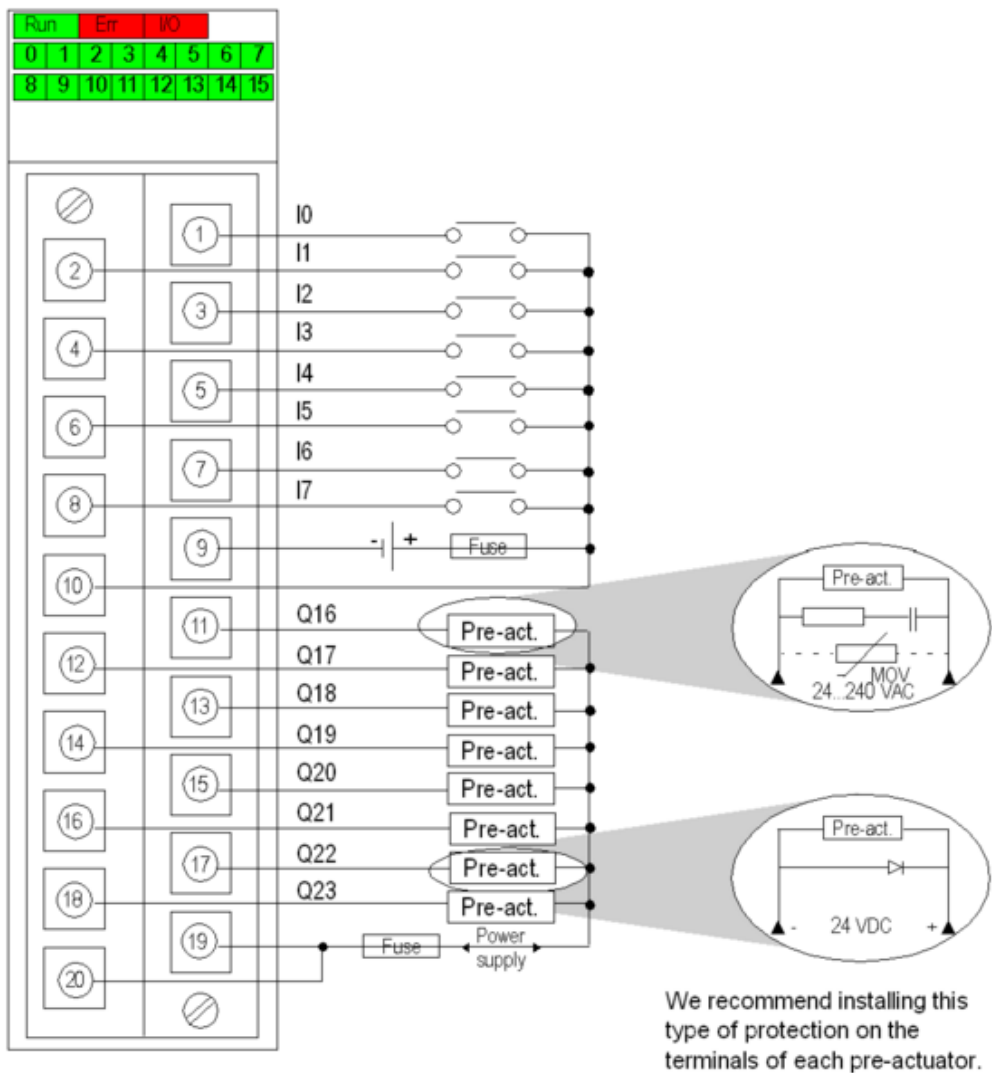

input power supply 24 VDC
output power supply 24 VDC or 24...240 VAC
input fuse 1 fast blow fuse of 0.5 A
output fuse 1 fast blow fuse of 12 A
pre-act pre-actuator