

Product datasheet

Specifications



gearbox straight teeth GBX - Ø 60 mm - reduction 8:1 < 10 arc.min - 18 N.m

GBX060008K

Price: 10,453.79 ZAR

Main

Range Compatibility	Lexium ILS Lexium 62 Lexium SD3 Lexium ILA Lexium 28 Lexium 52 Lexium 32 Lexium 62 ILM
Gear Box Type	Straight teeth
Product Or Component Type	Planetary gearbox
Device Short Name	GBX
Product Compatibility	BMH (70 mm, 1 motor stacks) BSH (55 mm, 1 motor stacks) BSH (55 mm, 2 motor stacks) BSH (55 mm, 3 motor stacks) BSH (70 mm, 1 motor stacks) BRS3 ILA (57 mm, 1 motor stacks) ILA (57 mm, 2 motor stacks) ILS (57 mm, 1 motor stacks) ILS (57 mm, 2 motor stacks) ILS (57 mm, 3 motor stacks) BCH2 (60 mm, 1 motor stacks) BCH2 (60 mm, 2 motor stacks) SH3 MH3 ILM
Gearbox External Diameter	60 mm
Reduction Ratio	8:1

Complementary

Maximum Torsional Backlash	10 arc.min
Torsional Rigidity	2.3 N.m/arcmin
Housing Colour	Black
Housing Material	Black anodized aluminium
Shaft Material	C 45
Additional Information	Lubricated for life
Service Life In Hours	30000 h at 100 rpm at 30 °C
Mounting Position	Any position
Efficiency	96 %
Maximum Radial Force Fr	340 N at 100 rpm, force applied at mid-distance from output shaft during 30000 hour at 30 °C
Maximum Axial Force Fa	450 N at 100 rpm, during 30000 hour at 30°C

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Moment Of Inertia	0.065 kg.cm²
Continuous Output Torque	18 N.m at 100 rpm at 30 °C
Maximum Output Torque	29 N.m at 100 rpm at 30 °C
Net Weight	0.9 kg
Input Diameter	14.0 mm

Environment

Noise Level	58 dB at 1 m, no-load
Ip Degree Of Protection	Shaft output: IP54
Ambient Temperature For Operation	-25...90 °C

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.8 cm
Package 1 Width	7.0 cm
Package 1 Length	12.9 cm
Package 1 Weight	823.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	10
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	8.744 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

 Mercury Free

 Rohs Exemption Information [Yes](#)

 Pvc Free

Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)


China Rohs Regulation [China RoHS declaration](#)
Product out of China RoHS scope. Substance declaration for your information

Environmental Disclosure [Product Environmental Profile](#)

Circularity Profile No need of specific recycling operations

Dimensions Drawings

Dimensions with Servo Motor Adaptation Kit

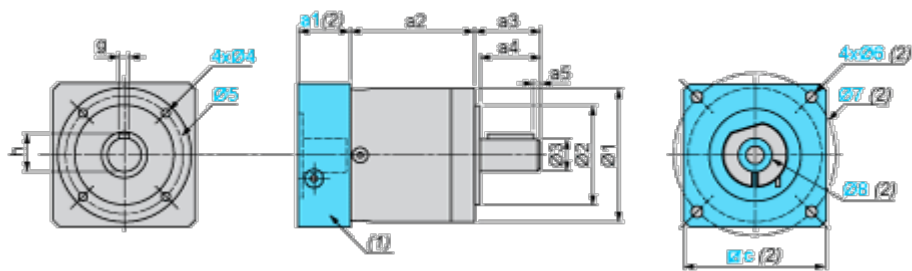

- (1) GBK adaptation kit
- (2) GBK adaptation kit related dimensions a1, c, Ø6, Ø7, Ø8 depend on the gearbox and servo motor combination
- Ø8 shaft end adaptor in case motor shaft diameter is smaller than gearbox input coupling diameter

Values in mm

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5
55	35	30	2.5	16	5	60	40 h7	14 h7	M5 x 8	52

Values in in.

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5
2.16	1.38	1.18	0.10	063	0.19	2.36	1.57 h7	0.55 h7	M5 x 0.31	2.05