

Product datasheet

Specifications



Multi touch screen. Harmony iPC. S Panel PC Optimized W10 DC. Base unit

HMIPSO0552D1001

Price: 38,003.01 ZAR

Main

Range Of Product	Harmony iPC
Product Or Component Type	Multi-touch screen
Processor Name	Intel Atom E3827 dual core at 1.75 GHz
Chipset Type	Intel Atom SoC
Free Slots	1 CFast
Display Size	10.1 inch
Display Colour	267000 colours
Luminance	300 cd/m ²
Pixel Resolution	4096 x 4096
Video Controller Type	Intel HD Graphics
Software Package	EcoStruxure secure connect advisor annual subscription cyber security license not included EcoStruxure Operator Terminal Expert run time HMI license not included EcoStruxure Machine SCADA Expert run time HMI/SCADA on configured offer only EcoStruxure augmented operator advisor server augmented operator license not included

Complementary

Number Of Points	5
Terminal Type	Touchscreen display
Memory Type	4 GB RAM DDR3 internal
Data Storage Equipment	CFast card
Aspect Ratio	16:9
Display Type	Colour TFT LCD LED
Display Resolution	1280 x 800 pixels WSVGA
Backlight Lifespan	50000 hours
View Angle Horizontal X Vertical	160 x 160°
Touch Panel	Projected capacitive technology (PCT)
Type Of Cooling	Fanless Passive
Watchdog Timer	1...255 ms
[Us] Rated Supply Voltage	24 V DC +/- 20 % 100...240 V AC with additional adaptor HMIYPSOMAC1
[In] Rated Current	1.9 A

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Mechanical Robustness	Hardness anti-scratch 7H
Local Signalling	Buzzer LED (green) for on LED (orange) for stand-by
Function Available	Operate with water on screen
Width	283.1 mm
Height	202.3 mm
Depth	61.3 mm
Cut-Out Dimensions	274.6 (+/- 0.7) x 193.8 (+/- 0.4)
Net Weight	2.5 kg
Display Size	10" wide multi-touch
Main Type	Optimised

Environment

Ip Degree Of Protection	IP66 front panel:
Product Certifications	RCM AS/NZS CCC EAC CE C-Tick
Standards	FCC part 15 class A UL 60950 CISPR 11 IEC 61000-6-2 IEC 60950 IEC 61000-6-4 CSA C22.2 No 60950
Directives	2006/95/EC - low voltage directive 2004/108/EC - electromagnetic compatibility
Pollution Degree	2
Ambient Air Temperature For Operation	0...55 °C SSD 0...55 °C Cfast card 0...45 °C HDD 0...45 °C Mini PCIe
Ambient Air Temperature For Storage	-20...60 °C
Relative Humidity	10...95 % non-condensing
Operating Altitude	2000
Vibration Resistance	1 gn (f = 5...500 Hz)HDD 2 gn (f = 5...500 Hz)SSD 2 gn (f = 5...500 Hz)Cfast card

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.1 cm
Package 1 Width	20.2 cm
Package 1 Length	28.3 cm
Package 1 Weight	2.5 kg
Unit Type Of Package 2	CAR

Number Of Units In Package 2	1
Package 2 Height	58.5 cm
Package 2 Width	22.0 cm
Package 2 Length	73.0 cm
Package 2 Weight	4.5 kg

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance


✓	Reach Free Of Svhc	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes

Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings


Dimensions

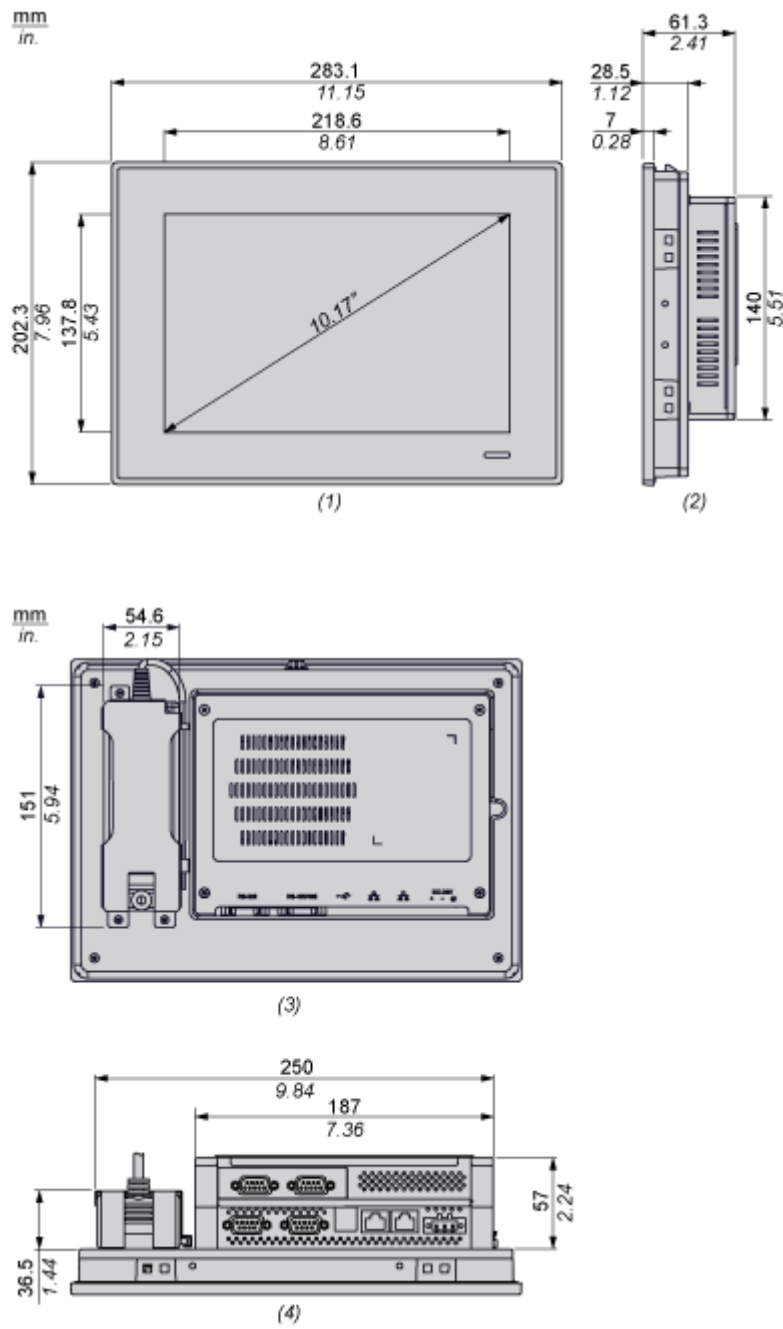

- (1) Front view
- (2) Right view
- (3) Back view
- (4) Bottom view


Mounting and Clearance

Spacing Requirements

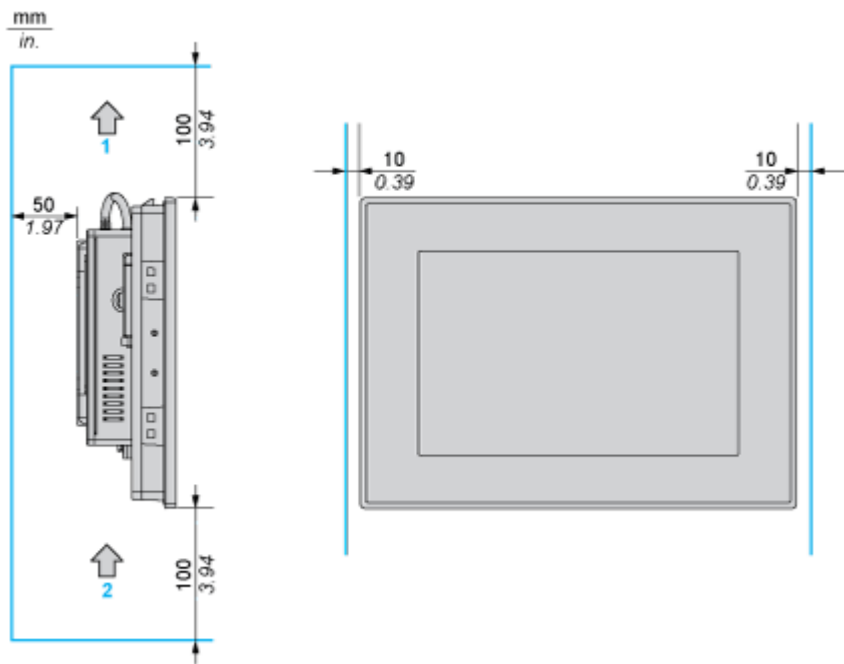


- 1 : Air out
- 2 : Air in

Mounting Orientation

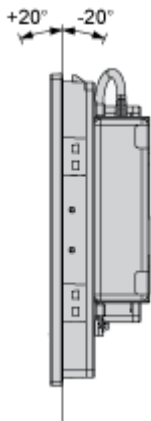

Panel Cut Dimensions

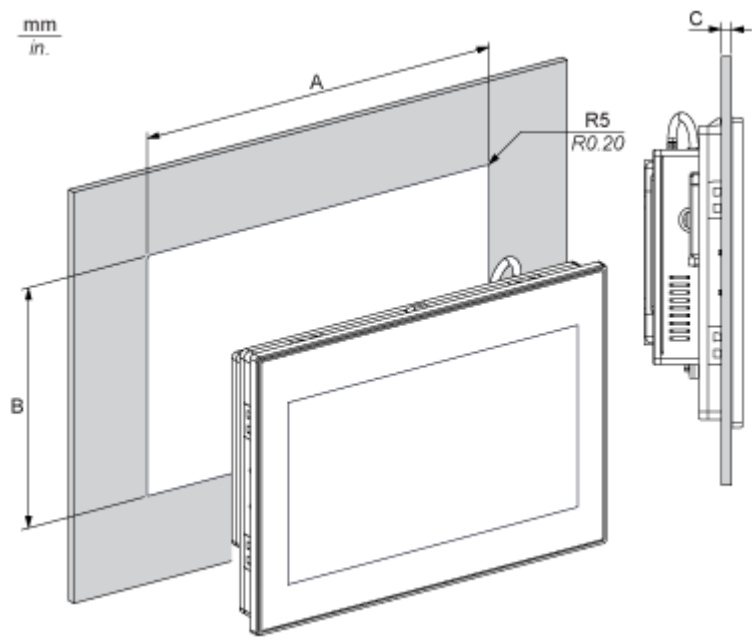

A		B		C		R	
mm	in.	mm	in.	mm	in.	mm	in.
274.6	10.81	193.8	7.63	2...6	0.08...0.23	5	0.20