

Product datasheet

Specifications



Universal timing relay. Zelio Time.
plug in. 0.1 s..60 mn. 24...240 V
AC. 1 OC

RE88867105

! To be discontinued

! Discontinued on: 31 Dec 2023

! To be end-of-service on: 31 Dec 2025

Price: 3,354.83 ZAR

Main

Range Of Product	Zelio Time
Product Or Component Type	Universal timing relay
Discrete Output Type	Relay
Width Pitch Dimension	35 mm
Component Name	RE88867
Time Delay Type	At B Ht Ac H D W Di A C
Time Delay Range	6...60 s 1...10 h 1...10 min 6...60 min 1...10 s 10...100 h 0.1...1 s

Complementary

Electrical Connection	Plug-in sub-base 8 pin(s)
Contacts Material	AgNi (cadmium free)
[In] Rated Current	8 A
[Us] Rated Supply Voltage	24 V DC 24...240 V AC 50/60 Hz
Voltage Range	0.85...1.1 Us
Housing Material	Self-extinguishing
Repeat Accuracy	+/- 0.5 % conforming to IEC 61812-1
Temperature Drift	+/- 0.05 %/°C
Voltage Drift	+/- 0.2 %/V
Setting Accuracy Of Time Delay	+/- 10 % of full scale at 25 °C conforming to IEC 61812-1
Minimum Pulse Duration	100 ms under load 30 ms

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Maximum Reset Time	100 ms on de-energisation
On-Load Factor	100 %
Maximum Power Consumption	32 VA at 240 V
Maximum Power Consumption	0.6 W at 24 V 1.5 W at 240 V
Breaking Capacity	2000 VA
Breaking Capacity	80 W
Minimum Switching Current	10 mA
Maximum Switching Current	8 A
Maximum Switching Voltage	250 V
Electrical Durability	100000 cycles at 8 A, 250 V for resistive load
Mechanical Durability	5000000 cycles
[Uimp] Rated Impulse Withstand Voltage	5 kV for 1.2...50 µs conforming to IEC 60664-1 5 kV for 1.2...50 µs conforming to IEC 61812-1
Marking	CE
Creepage Distance	4 kV/3 conforming to IEC 60664-1
Surge Withstand	1 kV differential mode conforming to IEC 61000-4-5 level 3 2 kV common mode conforming to IEC 61000-4-5 level 3
Local Signalling	LED indicator (green) for flashing: timing in progress LED indicator (green) for on steady: relay energised, no timing in progress LED indicator (green) for pulsing: relay energised, no timing in progress (except functions DI-D)
Net Weight	0.08 kg

Environment

Immunity To Microbreaks	10 ms
Dielectric Strength	2.5 kV for 1 mA/1 minute at 50 Hz conforming to IEC 61812-1
Standards	IEC 60669-2-3 93/68/EEC EN 50081-1/2 IEC 61812-1 EN 50082-1/2 73/23/EEC 89/336/EEC
Product Certifications	CSA cURus GL
Ambient Air Temperature For Operation	-20...60 °C
Ambient Air Temperature For Storage	-30...60 °C
Ip Degree Of Protection	IP20 (terminal block) conforming to IEC 60529 IP40 (housing) conforming to IEC 60529 IP50 (front panel) conforming to IEC 60529
Vibration Resistance	0.35 mm (f= 10...55 Hz) conforming to IEC 60068-2-6
Relative Humidity	93 % without condensation conforming to IEC 60068-2-3
Resistance To Electrostatic Discharge	6 kV in contact conforming to IEC 61000-4-2 level 3 8 kV in air conforming to IEC 61000-4-2 level 3
Resistance To Electromagnetic Fields	10 V/m 80 MHz to 1 GHz conforming to ENV 50140/204 level 3 10 V/m 80 MHz to 1 GHz conforming to IEC 61000-4-3 level 3
Resistance To Fast Transients	1 kV (capacitive connecting clip) conforming to IEC 61000-4-4 level 3 2 kV (direct) conforming to IEC 61000-4-4 level 3

Immunity To Radioelectric Fields	10 V (0.15...80 MHz) conforming to ENV 50141 (IEC 61000-4-6)
Immunity To Voltage Dips	30 % / 10 ms conforming to IEC 61000-4-11 60 % / 100 ms conforming to IEC 61000-4-11 95 % / 5 s conforming to IEC 61000-4-11
Disturbance Radiated/Conducted	Class B conforming to EN 55022 (EN 55011 group 1)

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4 cm
Package 1 Width	4.8 cm
Package 1 Length	9.8 cm
Package 1 Weight	75 g

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

 Mercury Free


 RoHS Exemption Information [Yes](#)

Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations


Dimensions Drawings

Width 35 mm

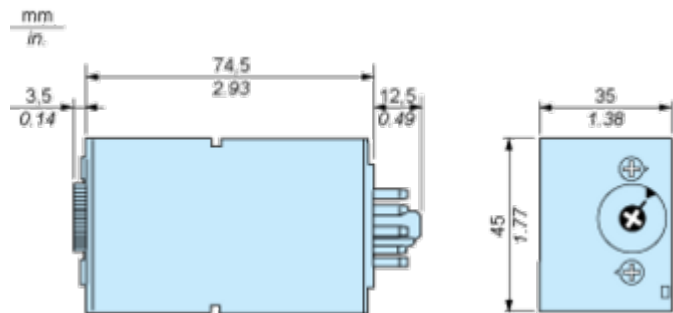

Connections and Schema

Wiring Diagram




Technical Description

Function A : Power on Delay Relay


Description

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function Ac : On- and Off-Delay Relay with Control Signal

Description


After power-up, closing of the control contact C causes the timing period T to start (timing can be interrupted by operating the Gate control contact G). At the end of this timing period, the relay closes.

When control contact C re-opens, the timing T starts.


At the end of this timing period T, the output reverts to its initial position (timing can be interrupted by operating the Gate control contact G).

The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function At : Power on Delay Relay (Summation) with Control Signal

Description

After power-up, the first opening of control contact C starts the timing. Timing can be interrupted each time control contact closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

Function: 1 Output



$T = t1 + t2 + \dots$

Function B : Interval Relay with Control Signal

Description

After power-up, pulsing or maintaining control contact C starts the timing T. The output R closes for the duration of the timing period T then reverts to its initial state.

Function: 1 Output



Function Bw : Double Interval Relay with Control Signal

Description

On closing and opening of control contact C, the output R closes for the duration of the timing period T.

Function: 1 Output




Function C : Off-Delay Relay with Control Signal


Description

After power-up and closing of the control contact C, the output R closes. When control contact C re-opens, timing T starts. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse Off)


Description

Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.
The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function Di : Symmetrical Flasher Relay (Starting Pulse On)


Description

Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.
The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function H : Interval Relay


Description

On energisation of the relay, timing period T starts and the output(s) R close(s). At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function Ht : Interval Relay (Summation) with Control Signal

Description

On energisation, the output R closes for the duration of a timing period T then reverts to its initial state.
Pulsing or maintaining control contact C will again close the output R.
Timing T is only active when control contact C is released and so the output R will not revert to its initial state until after a time $t_1 + t_2 + \dots$
The relay memorises the total, cumulative opening time of control contact C and, once the set time T is reached, the output R reverts to its initial state.

Function: 1 Output



$T = t_1 + t_2 + \dots$

Legend

-  Relay de-energised
-  Relay energised
-  Output open
-  Output closed

C	Control contact
G	Gate
R	Relay or solid state output
R1/R2	2 timed outputs
R2 inst.	The second output is instantaneous if the right position is selected
T	Timing period
Ta -	Adjustable On-delay
Tr -	Adjustable Off-delay
U	Supply