

Product datasheet

Specifications



Harmony. Miniature plug-in relay. 5 A. 2 CO. with LED. 12 V DC

RXM2LB2JD

Price: 120.33 ZAR

Main

Range Of Product	Harmony Electromechanical Relays
Coil Interference Suppression	Without
Series Name	Miniature
Product Or Component Type	Plug-in relay
Device Short Name	RXM
Contacts Type And Composition	2 C/O
[Ithe] Conventional Enclosed Thermal Current	5 A at -40...55 °C

Complementary

Contact Operation	Standard
[Uc] Control Circuit Voltage	12 V DC
Status Led	With
Control Type	Without push-button
[Uimp] Rated Impulse Withstand Voltage	4 kV during 1.2/50 µs conforming to IEC 61810-7
[Ie] Rated Operational Current	5 A (AC-1/DC-1) NO conforming to IEC 2.5 A (AC-1/DC-1) NC conforming to IEC 1 A at 28 V (DC-13) NO
Minimum Switching Capacity	25 mW subject to switching frequency, environment or expected reliability level etc
Operating Time	20 ms between coil de-energisation and making of the Off-delay contact 20 ms between coil energisation and making of the On-delay contact
Cad Overall Width	21 mm
Cad Overall Height	27 mm
Cad Overall Depth	46 mm
Minimum Switching Current	5 mA subject to switching frequency, environment or expected reliability level etc
Minimum Switching Voltage	5 V subject to switching frequency, environment or expected reliability level etc
Rated Operational Voltage Limits	9.6...13.2 V DC
[Ui] Rated Insulation Voltage	250 V conforming to IEC
Maximum Switching Voltage	250 V AC 28 V DC
Drop-Out Voltage Threshold	>= 0.1 Uc DC
Load Current	5 A at 250 V AC 5 A at 28 V DC
Maximum Switching Capacity	1250 VA AC 140 W DC

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Average Resistance	160 Ohm at 23 °C +/- 10 %
Average Coil Consumption	0.9 W, DC
Mechanical Durability	10000000 cycles
Electrical Durability	100000 cycles for resistive load 50000 cycles, 1 A at 28 V, DC-13 NO
Safety Reliability Data	B10d = 100000
Operating Rate	<= 1200 cycles/hour under load <= 18000 cycles/hour no-load
Utilisation Coefficient	20 %
Dielectric Strength	2000 V AC between coil and contact with basic insulation 2000 V AC between poles with basic insulation 1000 V AC between contacts with micro disconnection
Protection Category	RT I
Pollution Degree	3
Operating Position	Any position
Test Levels	Level A group mounting
Sale Per Indivisible Quantity	10
Contacts Material	Silver alloy (Ag/Ni)
Net Weight	0.033 kg

Environment

Ip Degree Of Protection	IP40 conforming to IEC 60529
Standards	CE IEC 61810-1 (iss. 2)
Ambient Air Temperature For Storage	-40...85 °C
Vibration Resistance	3 gn, amplitude = +/- 1 mm (f = 10...50 Hz)operating conforming to IEC 60068-2-6 6 gn, amplitude = +/- 1 mm (f = 10...50 Hz)not operating conforming to IEC 60068-2-6
Shock Resistance	30 gn for not operating conforming to IEC 60068-2-27 10 gn for in operation conforming to IEC 60068-2-27

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.095 cm
Package 1 Width	2.748 cm
Package 1 Length	4.56 cm
Package 1 Weight	39.0 g
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	2.9 cm
Package 2 Width	10.8 cm
Package 2 Length	13.3 cm
Package 2 Weight	350.0 g
Unit Type Of Package 3	S02

Number Of Units In Package 3	270
Package 3 Height	15.0 cm
Package 3 Width	30.0 cm
Package 3 Length	40.0 cm
Package 3 Weight	10.521 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance


✓	Reach Free Of Svhc	
✓	Toxic Heavy Metal Free	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes

Certifications & Standards


Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings

Dimensions


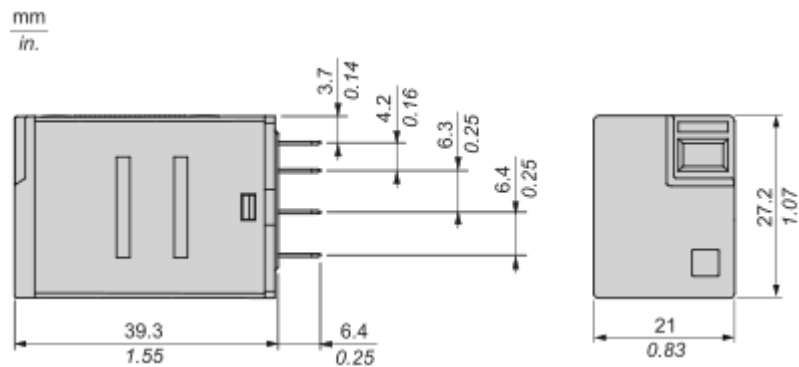


Pin Side View

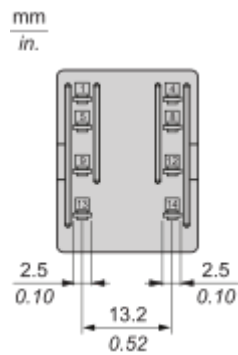

Connections and Schema

Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Performance Curves

Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.

For 2 Poles Relay



X : Contact current (A)

Y : Durability (Number of operating cycles)

A : Inductive load


B : Resistive load

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

Maximum Switching Capacity

For 2 Poles Relay

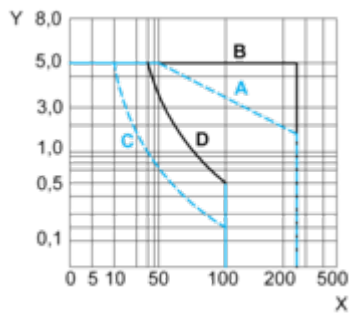

- X : Contact voltage (v)
- Y : Contact current (A)
- A : Inductive AC load
- B : Resistive AC load
- C : Inductive DC load
- D : Resistive DC load

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.
For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)
For low level loads (below 10mA), we recommend to use RXM*GB series with bifurcated contacts relays instead.