

Product datasheet

Specifications



RXZE2M114M - Socket. mixed contact. relay type RXM2 RXM4. connector connection. 250 V AC. Zelio Timing Relays to master your time in all simplicity !

RXZE2M114M

Price: 151.45 ZAR

Main

Range Of Product	Harmony Electromechanical Relays Harmony Timer Relays
Device Short Name	RXZ
Product Or Component Type	Socket
Product Compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact
Contacts Type And Composition	4 C/O
[Ith] Conventional Free Air Thermal Current	10 A

Complementary

Shape Of Pin	Flat
[Ue] Rated Operational Voltage	< 250 V
Contact Terminal Arrangement	Mixed
Connections - Terminals	Connector, 1 x 0.25...1 x 2.5 mm² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm² (AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm² (AWG 20...AWG 16) solid without cable end
Tightening Torque	< 1 N.m for M3 screw(s)
Fixing Mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
[Uimp] Rated Impulse Withstand Voltage	4 kV
Overvoltage Category	III
Pollution Degree	3
Sale Per Indivisible Quantity	10
Width	27 mm
Net Weight	0.056 kg

Environment

Ip Degree Of Protection	IP20 conforming to IEC 60529
Dielectric Strength	3000 V
Standards	IEC 61984
Product Certifications	UL CSA Lloyd's

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Marking	CE
Ambient Air Temperature For Storage	-40...85 °C
Ambient Air Temperature For Operation	-40...55 °C

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.686 cm
Package 1 Width	4.245 cm
Package 1 Length	7.918 cm
Package 1 Weight	0.054 kg
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	7.5 cm
Package 2 Width	8.8 cm
Package 2 Length	14.0 cm
Package 2 Weight	0.561 kg
Unit Type Of Package 3	S02
Number Of Units In Package 3	120
Package 3 Height	15.0 cm
Package 3 Width	30.0 cm
Package 3 Length	40.0 cm
Package 3 Weight	7.281 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance


✓	Reach Free Of Svhc	
✓	Toxic Heavy Metal Free	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes

Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations

Dimensions Drawings

Dimensions

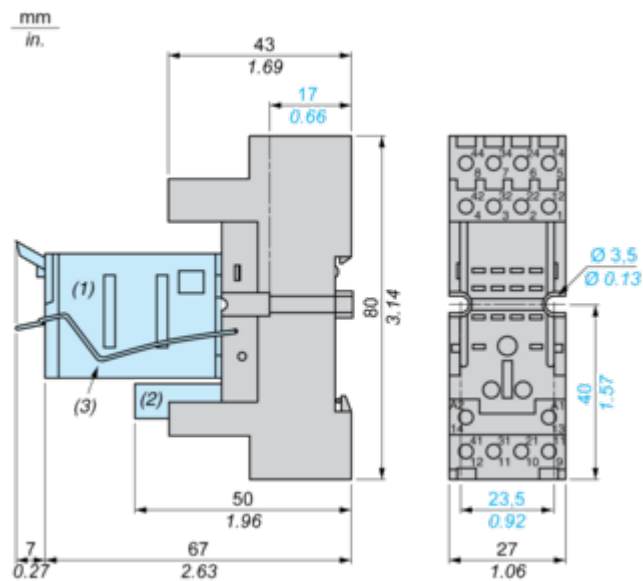

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes $\varnothing 3.5$ mm x 6.5 mm / $\varnothing 0.13$ in. x 0.25 in.

Connections and Schema

Wiring Diagram

