

Product datasheet

Specifications



standard analog output kit STB - +/- 10 V - 2 O - 15 bits + sign

STBAVO0200K

Price: 7,004.67 ZAR

Main

Range Of Product	Modicon STB distributed I/O solution
Product Or Component Type	Standard analog output kit
Kit Composition	STBAVO0200 module STBXTS2100, 6-terminal spring clamp connector STBXBA2000 base STBXTS1100, 6-terminal screw type connector
Analogue Output Type	Voltage: +/- 10 V Voltage: +/- 5 V Voltage: 0...10 V Voltage: 0...5 V Voltage: 1...5 V
Analogue Output Number	2
Analogue Output Resolution	15 bits + sign

Complementary

Analogue Output Current	150 mA
Response Time	3 ms
Cold Swapping	Yes
Hot Swapping	Yes for standard NIMs
Fallback	State 0 basic NIMs User configurable standard NIMs
Data Format	EN 61131-2 IEC 61131-2
Update Time	8 ms
Protection Type	Short-circuit protection
Integral Linearity	+/- 0.5 %FS
Differential Linearity	Monotonic
Absolute Accuracy Error	+/- 0.3 % of full scale at 25 °C
Temperature Drift	+/-0.01 %/°C
Insulation Between Channels And Actuator Bus	200 V
Addressing Requirement	4 output words
Product Compatibility	Mounting base STBXBA2000 Power distribution module STBPDT3100/3105
[Us] Rated Supply Voltage	24 V DC
Supply	Power distribution module
Current Consumption	265 mA at 5 V DC for logic bus

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Marking	CE
Overvoltage Category	II
Status Led	1 LED (green) module status (RDY) 1 LED (red) module error (ERR)
Depth	70 mm
Height	18.4 mm
Width	128.3 mm
Net Weight	0.116 kg

Environment

Product Certifications	CSA UL FM Class 1 Division 2
Pollution Degree	2 conforming to IEC 60664-1
Operating Altitude	<= 2000 m
Ip Degree Of Protection	IP20 conforming to IEC 61131-2 class 1
Ambient Air Temperature For Operation	-25...75 °C (without)
Ambient Air Temperature For Operation	- 13...158 °F without
Ambient Air Temperature For Storage	-40...85 °C without
Ambient Air Temperature For Storage	-40...185 °F without
Relative Humidity	95 % at 60 °C without condensation
Vibration Resistance	3 gn at 58...150 Hz on 35 x 7.5 mm symmetrical DIN rail 5 gn at 58...150 Hz on 35 x 15 mm symmetrical DIN rail +/-0.35 mm at 10...58 Hz
Shock Resistance	30 gn for 11 ms conforming to IEC 88 reference 2-27

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	8.0 cm
Package 1 Length	13.0 cm
Package 1 Weight	148.0 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	28
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	4.57 kg
Unit Type Of Package 3	PAL
Number Of Units In Package 3	448
Package 3 Height	60.0 cm
Package 3 Width	80.0 cm

Package 3 Length	448.0 cm
Package 3 Weight	66.304 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product’s sustainability >](#)

Well-being performance

 Mercury Free	
 Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

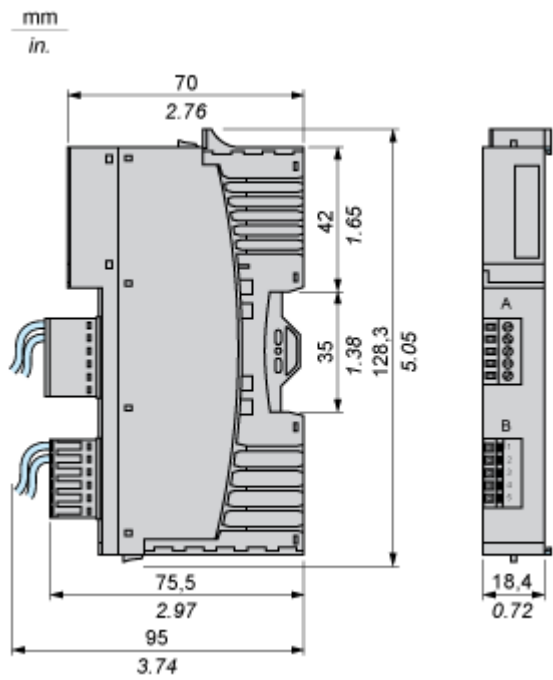


Connections and Schema


Wiring Diagrams

Examples

2 isolated analog actuators, 24 VDC external power supply

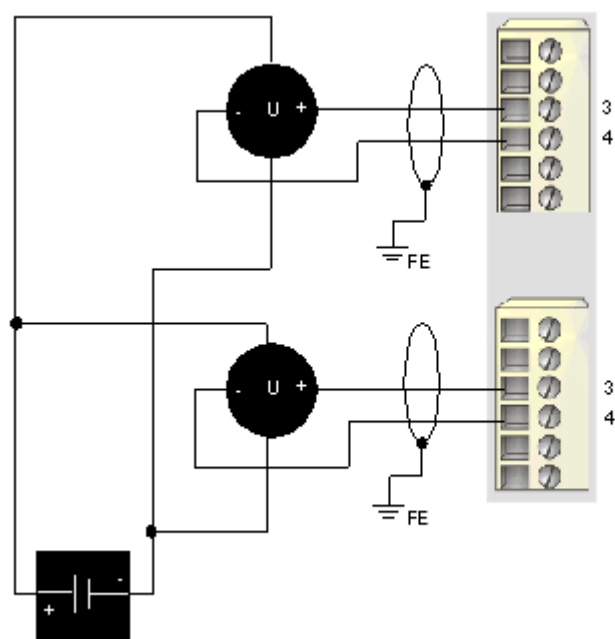

2 isolated analog actuators, external 24 VDC power supply

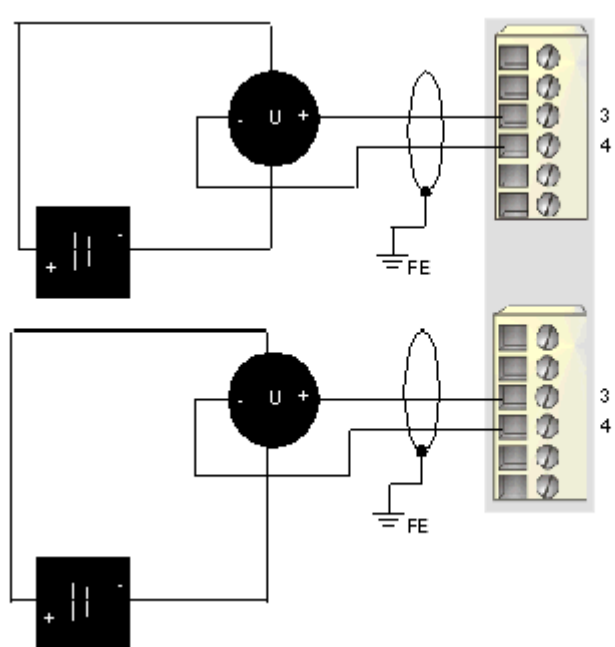

Pin	Top Connections	Bottom Connections
1	no connection	no connection
2	no connection	no connection
3	output to actuator 1	output to actuator 2

Pin	Top Connections	Bottom Connections
4	output channel return	output channel return
5	no connection	no connection
6	no connection	no connection