

Product datasheet

Specifications



standard digital output kit STB - 24 V 115..230 V AC DC - 2 O

STBDRC3210K

Price: 1,385.27 ZAR

Main

Range Of Product	Modicon STB distributed I/O solution
Product Or Component Type	Standard digital output kit
Kit Composition	STBXTS2110, 5-terminal spring clamp connector STBXTS1100, 5-terminal screw type connector STBXBA3000 base STBDRC3210 module
Discrete Output Number	2
Discrete Output Type	Relay
Discrete Output Function	2 NO/NC
Discrete Output Voltage	24 V 115...230 V
Discrete Output Voltage Type	AC DC

Complementary

Discrete Output Current	2000 mA
Discrete Output Logic	Positive or negative
Output Voltage	20...250 V AC 5...30 V DC
Response Time	5.25 ms off-to-on 6.75 ms on-to-off
Switching Capacity In Va	600 VA resistive
Mechanical Durability	1000000 cycles
Electrical Durability	100000 cycles resistive
Cold Swapping	Yes
Hot Swapping	Yes for standard NIMs
Fallback	State 0 basic NIMs User configurable standard NIMs
Protection Type	Coil protection integrated fuse on PDM time lag 10 A Output surge protection GMOV
Insulation Between Channels	500 V for 1 minute
Insulation Between Channels And Logic Bus	1780 V for 1 minute
Insulation Between Logic Bus And Actuator Bus	1500 V for 1 minute
Surge Current	20 A 10 ms capacitive
Minimum Load	50 mA

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Reset	Manual reset COM fault
Product Compatibility	I/O base STBXBA2000 Power distribution module STBPDT3100/3105
[Us] Rated Supply Voltage	24 V DC
Supply	Power distribution module
Current Consumption	55 mA at 5 V DC for logic bus
Marking	CE
Overvoltage Category	II
Status Led	1 LED (green) module status (RDY) 1 LED per channel (green) channel status (OUT1 to OUT2) 1 LED (red) module error (ERR)
Height	18.4 mm
Depth	70 mm
Width	128.3 mm
Net Weight	0.13 kg

Environment

Standards	IEC 61131-2
Product Certifications	FM Class 1 Division 2 CSA UL
Pollution Degree	2 conforming to IEC 60664-1
Operating Altitude	<= 2000 m
Ip Degree Of Protection	IP20 conforming to IEC 61131-2 class 1
Ambient Air Temperature For Operation	0...60 °C (without derating)
Ambient Air Temperature For Operation	32...140 °F without derating
Ambient Air Temperature For Storage	-40...85 °C without derating
Ambient Air Temperature For Storage	-40...185 °F without derating
Relative Humidity	95 % at 60 °C without condensation
Vibration Resistance	3 gn at 58...150 Hz on 35 x 7.5 mm symmetrical DIN rail 5 gn at 58...150 Hz on 35 x 15 mm symmetrical DIN rail +/-0.35 mm at 10...58 Hz
Shock Resistance	30 gn for 11 ms conforming to IEC 88 reference 2-27

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.7 cm
Package 1 Width	7.6 cm
Package 1 Length	13 cm
Package 1 Weight	150 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	28
Package 2 Height	15 cm

Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	4.5 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	448
Package 3 Height	75.0 cm
Package 3 Width	60.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	82 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.


[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

Well-being performance

 Mercury Free	
 Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions

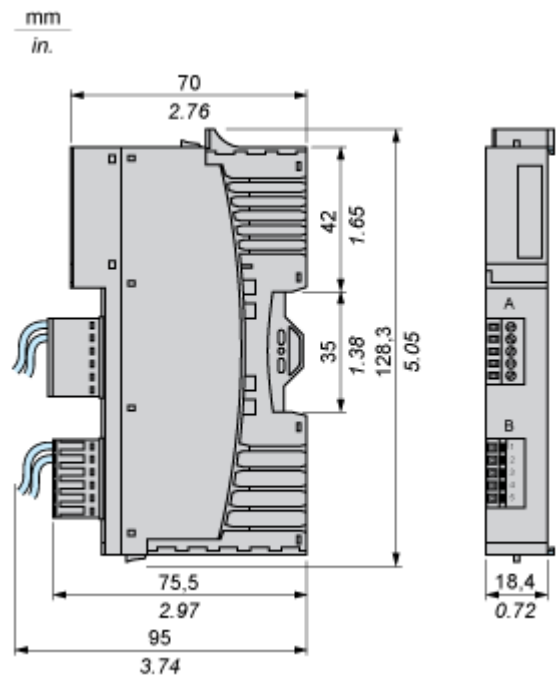


Connections and Schema

Wiring Diagrams


Examples

4 two-wire actuators, external AC power supply

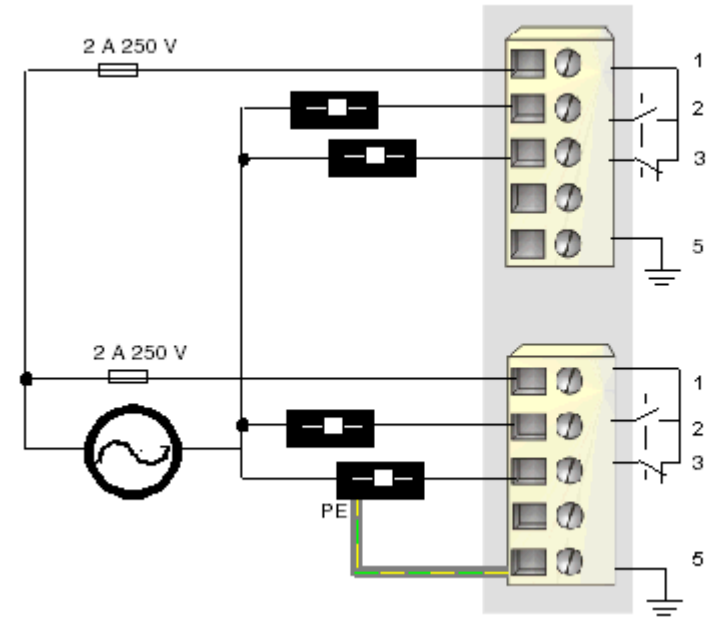

Pin	Top Connector	Bottom Connector
1	relay common 1	relay common 2
2	N.O. connection for relay 1	N.O. connection for relay 2
3	N.C. connection for relay 1	N.C. connection for relay 2
4	no connection	no connection
5	PE	PE

4 two-wire actuators, external DC power supply

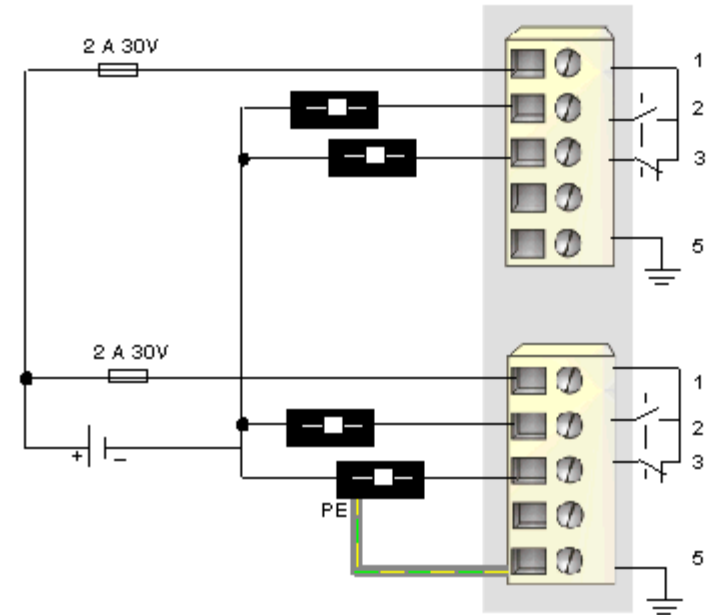

Pin	Top Connector	Bottom Connector
1	relay common 1	relay common 2
2	N.O. connection for relay 1	N.O. connection for relay 2
3	N.C. connection for relay 1	N.C. connection for relay 2
4	no connection	no connection
5	PE	PE