

# Product datasheet

Specifications



## TM241CE40T. Controller M241. 40 Input/Output. transistor PNP. Ethernet

TM241CE40T

**Price: 17,565.47 ZAR**

### Main

|                           |  |
|---------------------------|--|
| Range Of Product          | Modicon M241   |
| Product Or Component Type | Logic controller   |
| [Us] Rated Supply Voltage | 24 V DC  |
| Discrete Input Number     | 24, discrete input 8 fast input conforming to IEC 61131-2 Type 1                     |
| Discrete Output Type      | Transistor   |
| Discrete Output Number    | 16 transistor 4 fast output  |
| Discrete Output Voltage   | 24 V DC for transistor output  |
| Discrete Output Current   | 0.1 A for fast output (PTO mode) (Q0...Q3)<br>0.5 A for transistor output (Q0...Q15) |

### Complementary

|  |   |
|--|---|
| Discrete I/O Number                    | 40  |
| Maximum Number Of I/O Expansion Module | 7 (local I/O-Architecture)<br>14 (remote I/O-Architecture)  |
| Supply Voltage Limits                  | 20.4...28.8 V   |
| Inrush Current                         | 50 A  |
| Power Consumption In W                 | 32.6...40.4 W (with max number of I/O expansion module)   |
| Discrete Input Logic                   | Sink or source  |
| Discrete Input Voltage                 | 24 V  |
| Discrete Input Voltage Type            | DC  |
| Voltage State 1 Guaranteed             | $\geq 15$ V for input   |
| Voltage State 0 Guaranteed             | $\leq 5$ V for input  |
| Discrete Input Current                 | 10.7 mA for fast input<br>7 mA for input  |
| Input Impedance                        | 4.7 kOhm for input<br>2.81 kOhm for fast input  |
| Response Time                          | $\leq 2$ $\mu$ s turn-on, I0...I7 terminal(s) for fast input<br>$\leq 2$ $\mu$ s turn-off, I0...I7 terminal(s) for fast input<br>$\leq 2$ $\mu$ s turn-on, Q0...Q3 terminal(s) for fast output<br>$\leq 2$ $\mu$ s turn-off, Q0...Q3 terminal(s) for fast output<br>50 $\mu$ s turn-on, I0...I15 terminal(s) for input<br>50 $\mu$ s turn-off, I0...I15 terminal(s) for input<br>$\leq 34$ $\mu$ s turn-on, Q0...Q15 terminal(s) for output<br>$\leq 250$ $\mu$ s turn-off, Q0...Q15 terminal(s) for output |

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

|  |  |
|--|--|
| <b>Configurable Filtering Time</b>       | 1 µs for fast input<br>12 ms for fast input<br>0 ms for input<br>1 ms for input<br>4 ms for input<br>12 ms for input   |
| <b>Discrete Output Logic</b>             | Positive logic (source)  |
| <b>Output Voltage Limits</b>             | 30 V DC  |
| <b>Maximum Current Per Output Common</b> | 2 A  |
| <b>Maximum Output Frequency</b>          | 20 kHz for fast output (PWM mode)<br>100 kHz for fast output (PLS mode)<br>1 kHz for output  |
| <b>Accuracy</b>                          | +/- 0.1 % at 0.02...0.1 kHz for fast output<br>+/- 1 % at 0.1...1 kHz for fast output  |
| <b>Maximum Leakage Current</b>           | 5 µA for output  |
| <b>Maximum Voltage Drop</b>              | <1 V   |
| <b>Maximum Tungsten Load</b>             | <2.4 W   |
| <b>Protection Type</b>                   | Short-circuit protection<br>Short-circuit and overload protection with automatic reset<br>Reverse polarity protection for fast output  |
| <b>Reset Time</b>                        | 10 ms automatic reset output<br>12 s automatic reset fast output   |
| <b>Memory Capacity</b>                   | 64 MB for system memory RAM  |
| <b>Data Backed Up</b>                    | 128 MB built-in flash memory for backup of user programs   |
| <b>Data Storage Equipment</b>            | <= 16 GB SD card (optional)  |
| <b>Battery Type</b>                      | BR2032 lithium non-rechargeable, battery life: 4 year(s)   |
| <b>Backup Time</b>                       | 2 years at 25 °C   |
| <b>Execution Time For 1 Kinstruction</b> | 0.3 ms for event and periodic task<br>0.7 ms for other instruction   |
| <b>Application Structure</b>             | 3 cyclic master tasks + 1 freewheeling task<br>8 external event tasks<br>4 cyclic master tasks<br>8 event tasks  |
| <b>Realtime Clock</b>                    | With   |
| <b>Clock Drift</b>                       | <= 60 s/month at 25 °C   |
| <b>Positioning Functions</b>             | PTO function 4 channel(s) (positioning frequency: 100 kHz)<br>PTO function 4 channel(s) for transistor output (positioning frequency: 1 kHz)   |
| <b>Counting Input Number</b>             | 4 fast input (HSC mode) at 200 kHz<br>16 standard input at 1 kHz   |
| <b>Control Signal Type</b>               | A/B at 100 kHz for fast input (HSC mode)<br>Pulse/direction at 200 kHz for fast input (HSC mode)<br>Single phase at 200 kHz for fast input (HSC mode)  |
| <b>Integrated Connection Type</b>        | Non isolated serial link serial 1 with RJ45 connector and RS232/RS485 interface<br>Non isolated serial link serial 2 with removable screw terminal block connector and RS485 interface<br>USB port with mini B USB 2.0 connector<br>Ethernet with RJ45 connector |
| <b>Supply</b>                            | (serial 1)serial link supply: 5 V, <200 mA   |
| <b>Transmission Rate</b>                 | 1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485<br>1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232<br>480 Mbit/s for bus length of 3 m for USB<br>10/100 Mbit/s for Ethernet                          |
| <b>Communication Port Protocol</b>       | Non isolated serial link: Modbus master/slave  |

|   |   |
|---|---|
| <b>Port Ethernet</b>                          | 10BASE-T/100BASE-TX - 1 port(s) copper cable  |
| <b>Ethernet Services</b>                      | <p>FDR<br/> DHCP server via TM4 Ethernet switch network module<br/> DHCP client embedded Ethernet port<br/> SMS notifications<br/> Updating firmware<br/> SNMP client/server<br/> Programming<br/> NGVL<br/> Monitoring<br/> IEC VAR ACCESS<br/> FTP client/server<br/> Downloading<br/> SQL client<br/> Modbus TCP client I/O scanner<br/> Ethernet/IP originator I/O scanner embedded Ethernet port<br/> Ethernet/IP target, Modbus TCP server and Modbus TCP slave<br/> Send and receive email from the controller based on TCP/UDP library<br/> Web server (WebVisu &amp; XWeb system)<br/> OPC UA server<br/> DNS client</p> |
| <b>Local Signalling</b>                       | <p>1 LED (green) for PWR<br/> 1 LED (green) for RUN<br/> 1 LED (red) for module error (ERR)<br/> 1 LED (red) for I/O error (I/O)<br/> 1 LED (green) for SD card access (SD)<br/> 1 LED (red) for BAT<br/> 1 LED (green) for SL1<br/> 1 LED (green) for SL2<br/> 1 LED (red) for bus fault on TM4 (TM4)<br/> 1 LED per channel (green) for I/O state<br/> 1 LED (green) for Ethernet port activity</p>   |
| <b>Electrical Connection</b>                  | <p>removable screw terminal blockfor inputs and outputs (pitch 5.08 mm)<br/> removable screw terminal blockfor connecting the 24 V DC power supply (pitch 5.08 mm)</p>  |
| <b>Maximum Cable Distance Between Devices</b> | <p>Unshielded cable: &lt;50 m for input<br/> Shielded cable: &lt;10 m for fast input<br/> Unshielded cable: &lt;50 m for output<br/> Shielded cable: &lt;3 m for fast output</p>  |
| <b>Insulation</b>                             | <p>Between supply and internal logic at 500 V AC<br/> Non-insulated between supply and ground<br/> Between input and internal logic at 500 V AC<br/> Non-insulated between inputs<br/> Between fast input and internal logic at 500 V AC<br/> Between output and internal logic at 500 V AC<br/> Non-insulated between outputs<br/> Between fast output and internal logic at 500 V AC<br/> Between output groups at 500 V AC</p>   |
| <b>Marking</b>                                | CE  |
| <b>Surge Withstand</b>                        | <p>1 kV power lines (DC) common mode conforming to IEC 61000-4-5<br/> 1 kV shielded cable common mode conforming to IEC 61000-4-5<br/> 0.5 kV power lines (DC) differential mode conforming to IEC 61000-4-5<br/> 1 kV relay output differential mode conforming to IEC 61000-4-5<br/> 1 kV input common mode conforming to IEC 61000-4-5<br/> 1 kV transistor output common mode conforming to IEC 61000-4-5</p>   |
| <b>Web Services</b>                           | Web server  |
| <b>Maximum Number Of Connections</b>          | <p>8 Modbus server<br/> 8 SoMachine protocol<br/> 10 web server<br/> 4 FTP server<br/> 16 Ethernet/IP target<br/> 8 Modbus client</p>   |
| <b>Number Of Server Device(S)</b>             | <p>64 Modbus TCP:<br/> 16 EtherNet/IP:</p>  |
| <b>Cycle Time</b>                             | <p>10 ms 16 EtherNet/IP<br/> 64 ms 64 Modbus TCP</p>  |

|                         |   |
|-------------------------|---|
| <b>Mounting Support</b> | Top hat type TH35-15 rail conforming to IEC 60715<br>Top hat type TH35-7.5 rail conforming to IEC 60715<br>plate or panel with fixing kit |
| <b>Height</b>           | 90 mm   |
| <b>Depth</b>            | 95 mm   |
| <b>Width</b>            | 190 mm  |
| <b>Net Weight</b>       | 0.62 kg   |

## Environment

|  |  |
|--|--|
| <b>Standards</b>                             | ANSI/ISA 12-12-01<br>CSA C22.2 No 142<br>CSA C22.2 No 213<br>IEC 61131-2:2007<br>Marine specification (LR, ABS, DNV, GL)<br>UL 508   |
| <b>Product Certifications</b>                | RCM<br>cULus<br>CE<br>UKCA<br>DNV-GL<br>ABS<br>LR  |
| <b>Resistance To Electrostatic Discharge</b> | 8 kV in air conforming to IEC 61000-4-2<br>4 kV on contact conforming to IEC 61000-4-2   |
| <b>Resistance To Electromagnetic Fields</b>  | 10 V/m 80 MHz...1 GHz conforming to IEC 61000-4-3<br>3 V/m 1.4 GHz...2 GHz conforming to IEC 61000-4-3<br>1 V/m 2 GHz...3 GHz conforming to IEC 61000-4-3  |
| <b>Resistance To Fast Transients</b>         | 2 kV (power lines) conforming to IEC 61000-4-4<br>1 kV (Ethernet line) conforming to IEC 61000-4-4<br>1 kV (serial link) conforming to IEC 61000-4-4<br>1 kV (input) conforming to IEC 61000-4-4<br>1 kV (transistor output) conforming to IEC 61000-4-4   |
| <b>Resistance To Conducted Disturbances</b>  | 10 V 0.15...80 MHz conforming to IEC 61000-4-6<br>3 V 0.1...80 MHz conforming to Marine specification (LR, ABS, DNV, GL)<br>10 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz) conforming to Marine specification (LR, ABS, DNV, GL)  |
| <b>Electromagnetic Emission</b>              | Conducted emissions - test level: 120...69 dB $\mu$ V/m QP ( power lines) at 10...150 kHz conforming to IEC 55011<br>Conducted emissions - test level: 63 dB $\mu$ V/m QP ( power lines) at 1.5...30 MHz conforming to IEC 55011<br>Radiated emissions - test level: 40 dB $\mu$ V/m QP class A at 30...230 MHz conforming to IEC 55011<br>Conducted emissions - test level: 79...63 dB $\mu$ V/m QP ( power lines) at 150...1500 kHz conforming to IEC 55011<br>Radiated emissions - test level: 47 dB $\mu$ V/m QP class A at 230...1000 MHz conforming to IEC 55011 |
| <b>Immunity To Microbreaks</b>               | 10 ms  |
| <b>Ambient Air Temperature For Operation</b> | -10...50 °C (vertical installation)<br>-10...55 °C (horizontal installation)   |
| <b>Ambient Air Temperature For Storage</b>   | -25...70 °C  |
| <b>Relative Humidity</b>                     | 10...95 %, without condensation (in operation)<br>10...95 %, without condensation (in storage)   |
| <b>Ip Degree Of Protection</b>               | IP20 with protective cover in place  |
| <b>Pollution Degree</b>                      | 2  |
| <b>Operating Altitude</b>                    | 0...2000 m   |
| <b>Storage Altitude</b>                      | 0...3000 m   |

|                             |  |
|-----------------------------|--|
| <b>Vibration Resistance</b> | 3.5 mm at 5...8.4 Hz on symmetrical rail<br>3 gn at 8.4...150 Hz on symmetrical rail<br>3.5 mm at 5...8.4 Hz on panel mounting<br>3 gn at 8.4...150 Hz on panel mounting |
| <b>Shock Resistance</b>     | 15 gn for 11 ms  |

## Packing Units

|                                     |           |
|-------------------------------------|-----------|
| <b>Unit Type Of Package 1</b>       | PCE       |
| <b>Number Of Units In Package 1</b> | 1         |
| <b>Package 1 Height</b>             | 11.259 cm |
| <b>Package 1 Width</b>              | 13.069 cm |
| <b>Package 1 Length</b>             | 22.934 cm |
| <b>Package 1 Weight</b>             | 770.0 g   |
| <b>Unit Type Of Package 2</b>       | S03       |
| <b>Number Of Units In Package 2</b> | 6         |
| <b>Package 2 Height</b>             | 30 cm     |
| <b>Package 2 Width</b>              | 30 cm     |
| <b>Package 2 Length</b>             | 40 cm     |
| <b>Package 2 Weight</b>             | 5.461 kg  |
| <b>Unit Type Of Package 3</b>       | P06       |
| <b>Number Of Units In Package 3</b> | 48        |
| <b>Package 3 Height</b>             | 75.0 cm   |
| <b>Package 3 Width</b>              | 40.0 cm   |
| <b>Package 3 Length</b>             | 80.0 cm   |
| <b>Package 3 Weight</b>             | 54 kg     |

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Mercury Free

Rohs Exemption Information [Yes](#)

Pvc Free

## Certifications & Standards

**Reach Regulation** [REACH Declaration](#)

**Eu Rohs Directive** Pro-active compliance (Product out of EU RoHS legal scope)

**China Rohs Regulation** [China RoHS declaration](#)

**Environmental Disclosure** [Product Environmental Profile](#)


**Weee** The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

**Circularity Profile** [End of Life Information](#)

Dimensions Drawings

Dimensions


---

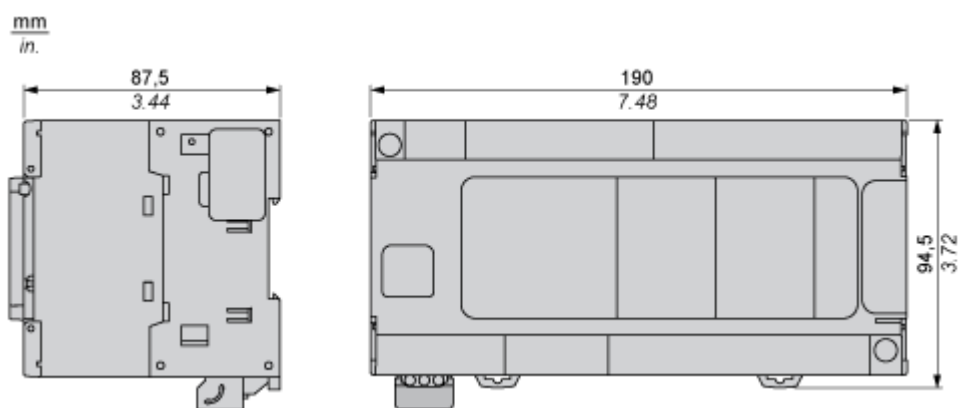

Mounting and Clearance


Clearance

---

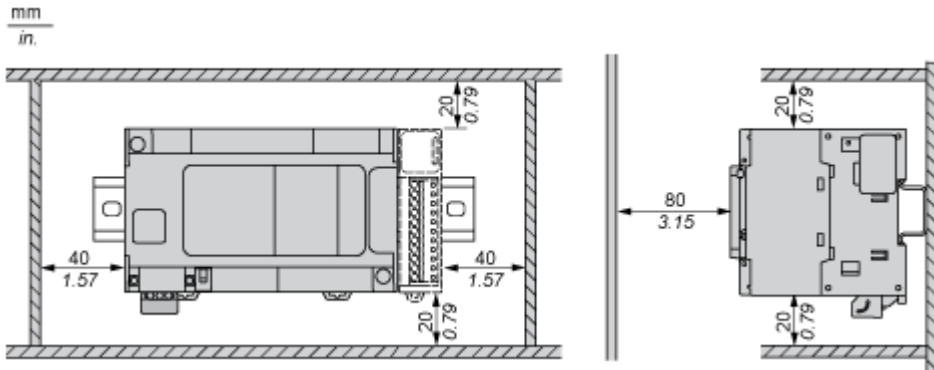


**Mounting Position**

---

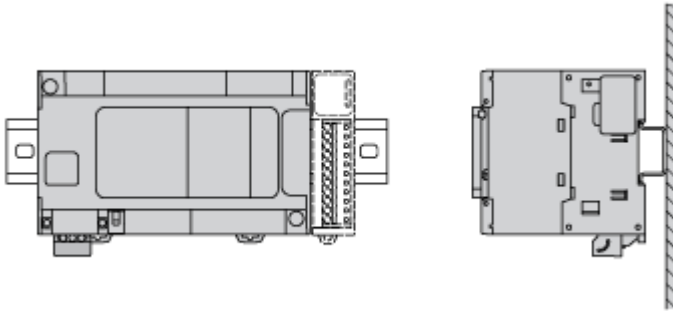


**Acceptable Mounting**

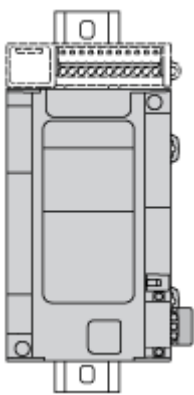

**NOTE:** Expansion modules must be mounted above the logic controller.


**Incorrect Mounting**

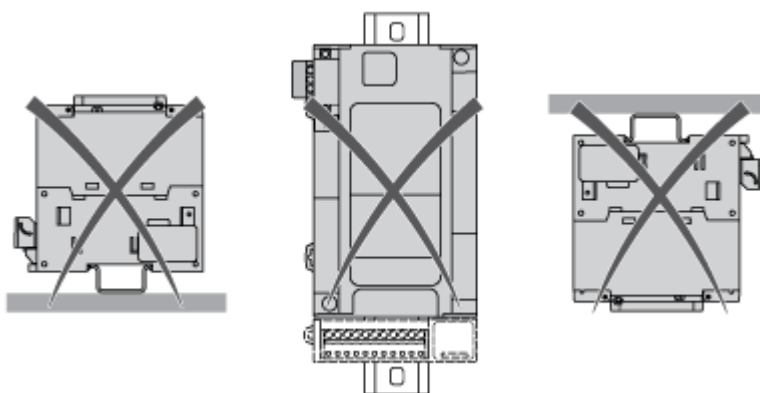

Direct Mounting On a Panel Surface

---


Mounting Hole Layout

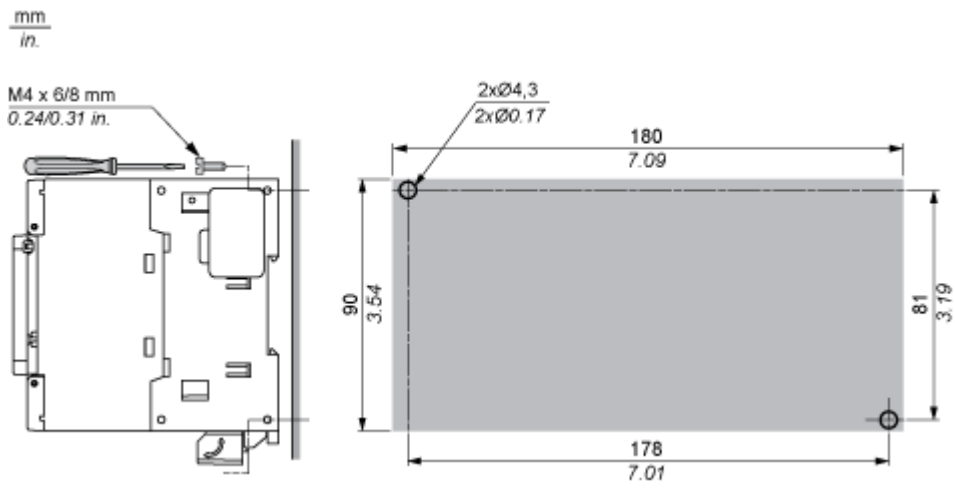

Connections and Schema


Digital Inputs

Wiring Diagram

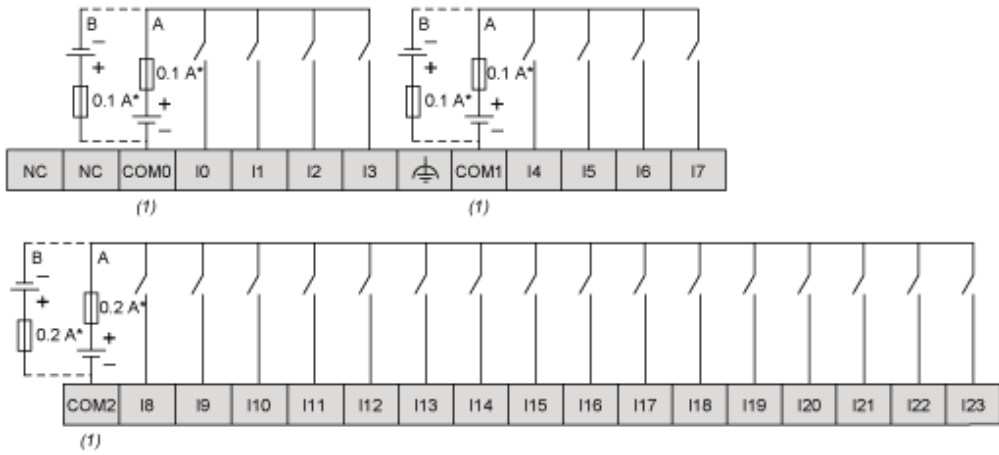

- (\*) : Type T fuse
- (1) : The COM0, COM1 and COM2 terminals are not connected internally
- (A) : Sink wiring (positive logic)
- (B) : Source wiring (negative logic)


Fast Input Wiring (I0...I7)



Fast Transistor Outputs

---

Wiring Diagram

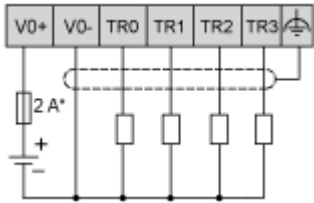


(\*) : 2 A fast-blow fuse

Transistor Outputs

---


Wiring Diagram

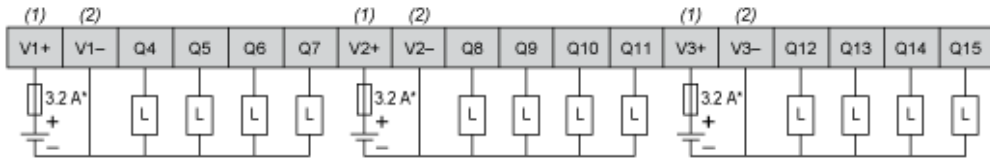

- (\*) : Type T fuse
- (1) : The V1+, V2+ and V3+ terminals are not connected internally.
- (2) : The V1-, V2- and V3- terminals are not connected internally.

USB Mini-B Connection

---

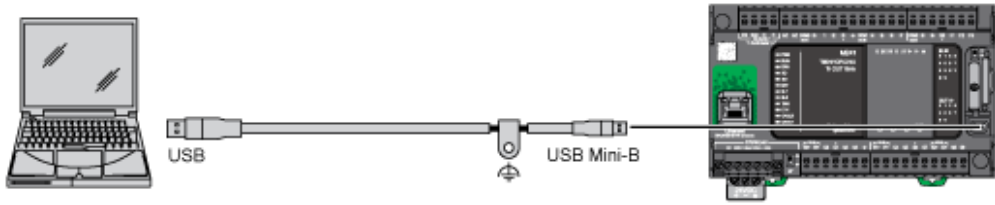

Ethernet Connection to a PC

---

