

Product datasheet

Specifications



passive filter - 37 A - 400 V - 50 Hz - for variable speed drive

VW3A46106

⚠ Discontinued on: 30 Sept 2023

Price: 89,644.21 ZAR

⚠ Discontinued

Main

Product Or Component Type	Passive filter
Product Specific Application	Reduction of current harmonics

Complementary

Range Compatibility	Altivar Process ATV900 Altivar 61 Altivar Process ATV600 Altivar 71
[Us] Rated Supply Voltage	400 V +/- 10 %
Power Supply Frequency	50 Hz +/- 2 %
Quantity Per Drive	1 filter per drive for variable speed drive ATV61W motor: 18.5 kW/25 hp 1 filter per drive for variable speed drive ATV61H motor: 18.5 kW/25 hp 1 filter per drive for variable speed drive ATV71H motor: 18.5 kW/25 hp 1 filter per drive for variable speed drive ATV71W motor: 18.5 kW/25 hp 1 filter per drive for variable speed drive ATV650 wall mount, motor: 18.5 kW/25 hp 1 filter per drive for variable speed drive ATV630 wall mount, motor: 18.5 kW/25 hp 1 filter per drive for variable speed drive ATV950 wall mount, motor: 18.5 kW/25 hp 1 filter per drive for variable speed drive ATV930 wall mount, motor: 18.5 kW/25 hp
[In] Rated Current	35 A for input 37 A for output
Network Number Of Phases	3 phases
Thdi	10 % for variable speed drive ATV61W motor: 18.5 kW/25 hp 16 % for variable speed drive ATV61H motor: 18.5 kW/25 hp 16 % for variable speed drive ATV71H motor: 18.5 kW/25 hp 16 % for variable speed drive ATV71W motor: 18.5 kW/25 hp 10 % for variable speed drive ATV650 motor: 18.5 kW/25 hp 10 % for variable speed drive ATV630 motor: 18.5 kW/25 hp 10 % for variable speed drive ATV950 motor: 18.5 kW/25 hp 10 % for variable speed drive ATV930 motor: 18.5 kW/25 hp
Max Current	1.5 x nominal current (duration = 60 s)
Efficiency	98 %
Thermal Losses	242 W
Cos Phi	1 (150 % of line current) 0.85 (75 % of line current) 0.99 (100 % of line current)
Electrical Connection	A, B terminal, connection capacity: 2.5 mm² X1-1...X2-3 terminal, connection capacity: 1.5...25 mm²
Electrical Insulation Class	Class F
Net Weight	37 kg

Environment

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ip Degree Of Protection	IP20
	IP55 (enclosure mounting)
Vibration Resistance	2 mm peak to peak (f= 5...13.2 Hz) conforming to IEC 60068-2-6 0.7 gn (f= 13.2...150 Hz) conforming to IEC 60068-2-6
Relative Humidity	5...85 % without condensation
Ambient Air Temperature For Operation	45...60 °C (with current derating 3 % per °C) 5...45 °C (without current derating)
Ambient Air Temperature For Storage	-25...55 °C storage in original packaging -25...65 °C during transport
Operating Altitude	<= 1000 m without current derating > 1000...4000 m with current derating 5 % per 1000 m
Standards	IEC 61000-2-2 G5/4 engineering recommendation IEC 61000-2-4 IEC 61000-3-2 IEC 61000-3-4 IEC 61000-3-12

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	50.000 cm
Package 1 Width	80.000 cm
Package 1 Length	60.000 cm
Package 1 Weight	46.400 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product's sustainability >](#)

Well-being performance

✓	Reach Free Of Svhc	
✓	Toxic Heavy Metal Free	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration	
China Rohs Regulation	China RoHS declaration	

Dimensions Drawings

Dimensions

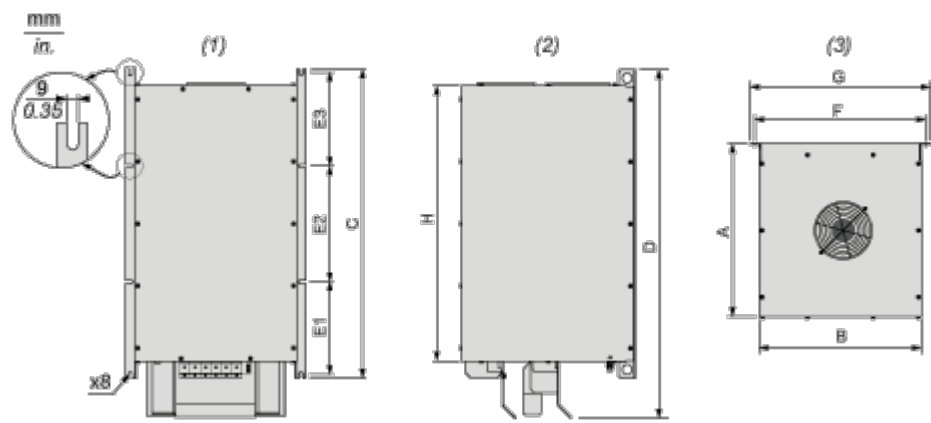

- (1) Front view
- (2) Right side view
- (3) Top view

Dimensions in mm

A	B	C	D	E1	E2	E3	F	G	H
242	330	547	594.08	145	233	145	353	378	460


Dimensions in in.

A	B	C	D	E1	E2	E3	F	G	H
9.53	12.99	21.54	23.39	5.71	9.17	5.71	13.90	14.88	18.11

Mounting and Clearance

Mounting Recommendations


Vertical Mounting Only

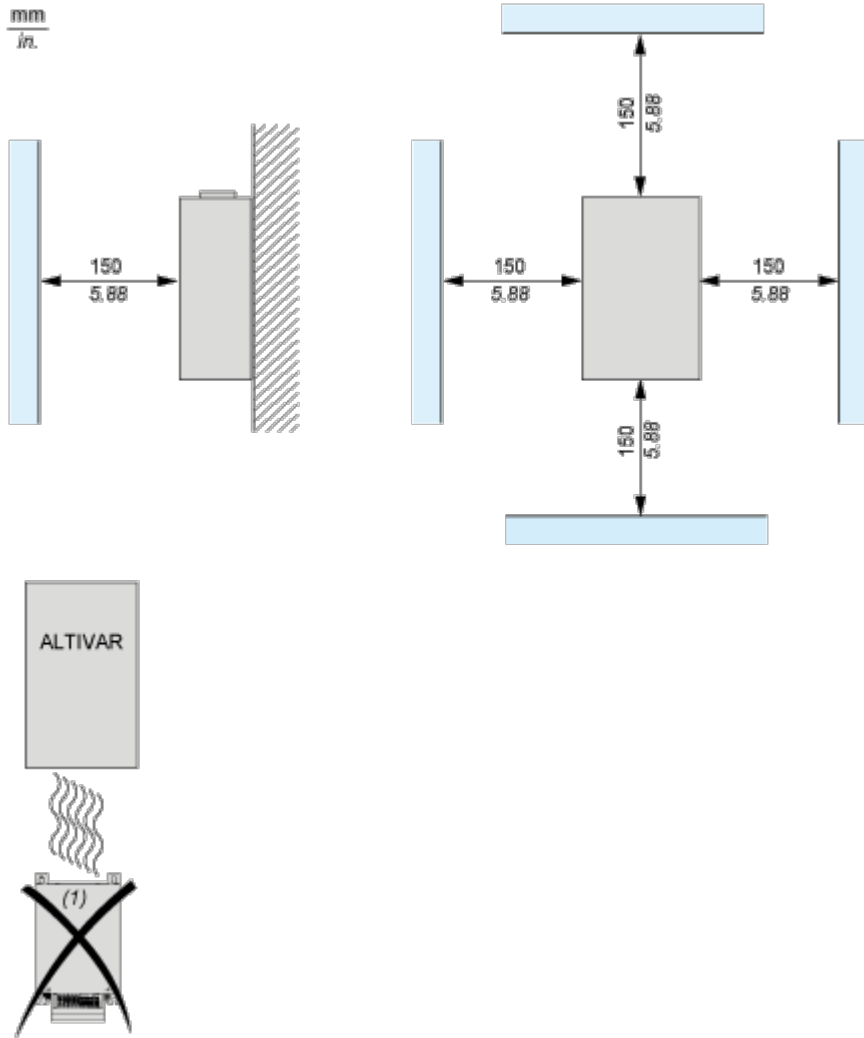

(1) Filter

Connections and Schema

Recommended Schema

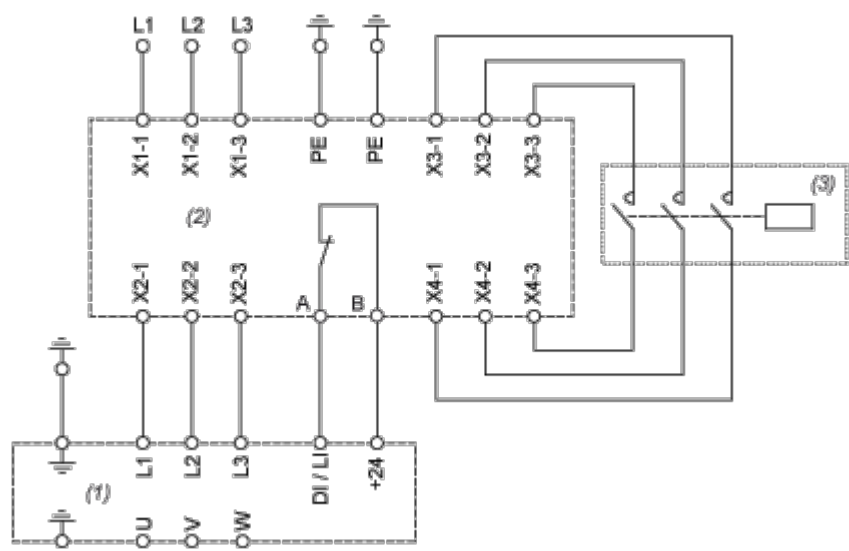

- (1) Drive
- (2) Filter
- (3) Optional