

Product datasheet

Specifications



passive filter - 23 A - 400 V - 50 Hz -
for variable speed drive

VW3A46123

Price: 80,625.19 ZAR

Main

Product Or Component Type	Passive filter
Product Specific Application	Reduction of current harmonics

Complementary

Range Compatibility	Altivar 61 Altivar Process ATV900 Altivar Process ATV600 Altivar 71
[Us] Rated Supply Voltage	400 V +/- 10 %
Power Supply Frequency	50 Hz +/- 2 %
Quantity Per Drive	1 filter per drive for variable speed drive ATV61W motor: 11 kW/15 hp 1 filter per drive for variable speed drive ATV61H motor: 11 kW/15 hp 1 filter per drive for variable speed drive ATV71H motor: 11 kW/15 hp 1 filter per drive for variable speed drive ATV71P motor: 11 kW/15 hp 1 filter per drive for variable speed drive ATV71W motor: 11 kW/15 hp 1 filter per drive for variable speed drive ATV630 wall mount, motor: 11 kW/15 hp 1 filter per drive for variable speed drive ATV650 wall mount, motor: 11 kW/15 hp 1 filter per drive for variable speed drive ATV930 wall mount, motor: 11 kW/15 hp 1 filter per drive for variable speed drive ATV950 wall mount, motor: 11 kW/15 hp
[In] Rated Current	22 A for input 23 A for output
Network Number Of Phases	3 phases
Thdi	10 % for variable speed drive ATV61H motor: 11 kW/15 hp 10 % for variable speed drive ATV71H motor: 11 kW/15 hp 10 % for variable speed drive ATV71P motor: 11 kW/15 hp 10 % for variable speed drive ATV71W motor: 11 kW/15 hp 5 % for variable speed drive ATV61W motor: 11 kW/15 hp 5 % for variable speed drive ATV630 motor: 11 kW/15 hp 5 % for variable speed drive ATV650 motor: 11 kW/15 hp 5 % for variable speed drive ATV930 motor: 11 kW/15 hp 5 % for variable speed drive ATV950 motor: 11 kW/15 hp
Max Current	1.5 x nominal current (duration = 60 s)
Efficiency	98 %
Thermal Losses	258 W
Cos Phi	1 (150 % of line current) 0.85 (75 % of line current) 0.99 (100 % of line current)
Electrical Connection	X1-1...X2-3 terminal, connection capacity: 0.5...10 mm² A, B terminal, connection capacity: 2.5 mm²
Electrical Insulation Class	Class F
Net Weight	30 kg

Environment

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ip Degree Of Protection	IP20
	IP55 (enclosure mounting)
Vibration Resistance	2 mm peak to peak (f= 5...13.2 Hz) conforming to IEC 60068-2-6 0.7 gn (f= 13.2...150 Hz) conforming to IEC 60068-2-6
Relative Humidity	5...85 % without condensation
Ambient Air Temperature For Operation	45...60 °C (with current derating 3 % per °C) 5...45 °C (without current derating)
Ambient Air Temperature For Storage	-25...55 °C storage in original packaging -25...65 °C during transport
Operating Altitude	<= 1000 m without current derating > 1000...4000 m with current derating 5 % per 1000 m
Standards	IEC 61000-3-4 G5/4 engineering recommendation IEC 61000-3-12 IEC 61000-2-2 IEC 61000-2-4 IEC 61000-3-2

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	56.0 cm
Package 1 Width	40.0 cm
Package 1 Length	60.0 cm
Package 1 Weight	37.5 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product's sustainability >](#)

Well-being performance

	Reach Free Of Svhc	
	Toxic Heavy Metal Free	
	Mercury Free	
	Rohs Exemption Information	Yes
Reach Regulation		REACH Declaration
Eu Rohs Directive		Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation		China RoHS declaration

Dimensions Drawings

Dimensions

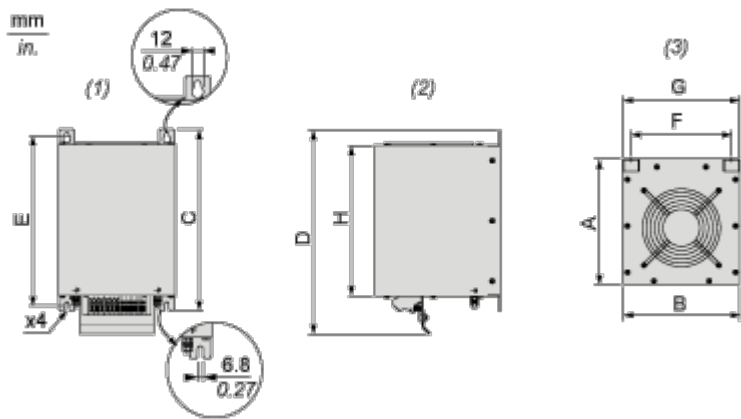

- (1) Front view
- (2) Right side view
- (3) Top view

Dimensions in mm

A	B	C	D	E	F	G	H
247.5	232	399.55	436.11	380	205	230	350

Dimensions in in.

A	B	C	D	E	F	G	H
9.74	9.13	15.73	17.17	14.96	8.07	9.06	13.78

Mounting and Clearance

Mounting Recommendations


Vertical Mounting Only



(1) Filter

Connections and Schema

Recommended Schema

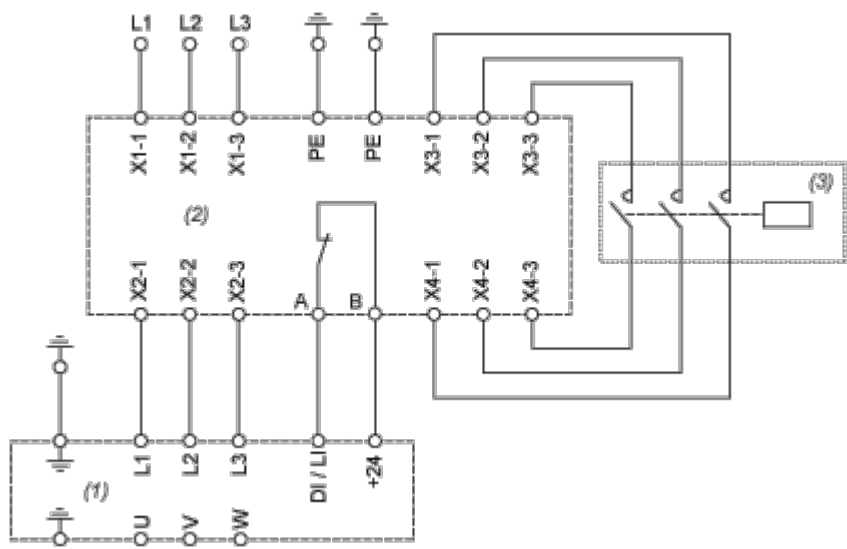

- (1) Drive
- (2) Filter
- (3) Optional