

Product datasheet

Specifications



braking resistor - 100 ohms - 1.7 kW - IP20

VW3A7750

Price: 7,098.95 ZAR

Main

Range Compatibility	Altivar Machine ATV340 Altivar Process ATV900
Product Or Component Type	Braking resistor
Ohmic Value	100 Ohm
[Ue] Rated Operational Voltage	24 V DC 250 V AC

Complementary

Product Compatibility	Variable speed drive ATV930 wall mount 0.75 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 1.5 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 2.2 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 3 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 4 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 0.75 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 1.5 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 2.2 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 3 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 4 kW 380...480 V severe cycle Variable speed drive ATV340 0.75 kW 380...480 V severe cycle Variable speed drive ATV340 1.5 kW 380...480 V severe cycle Variable speed drive ATV340 2.2 kW 380...480 V severe cycle Variable speed drive ATV340 3 kW 380...480 V severe cycle Variable speed drive ATV930 2.2 kW 500...690 V severe cycle Variable speed drive ATV930 3 kW 500...690 V severe cycle Variable speed drive ATV930 4 kW 500...690 V severe cycle Variable speed drive ATV930 5.5 kW 500...690 V severe cycle Variable speed drive ATV930 3 hp 600 V severe cycle Variable speed drive ATV930 5 hp 600 V severe cycle Variable speed drive ATV930 7.5 hp 600 V severe cycle
Duty Cycle	Severe cycle (heavy duty) <54 s braking with 100 % braking torque for a 120 s cycle Severe cycle (heavy duty) <6 s braking with 165 % braking torque for a 120 s cycle
Average Power Available	1.7 kW at 50 °C
Electrical Connection	terminal, connection capacity: <= 10 mm² / AWG 8 for drive terminal, connection capacity: <= 2.5 mm² / AWG 12 for temperature control switch
Protection Type	Thermal protection via drive or temperature control switch at 120 °C
Width	290 mm
Height	570 mm
Depth	180 mm
Net Weight	5 kg

Environment

Ip Degree Of Protection	IP20
Ambient Air Temperature For Storage	-25...70 °C

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient Air Temperature For Operation	0...50 °C
---------------------------------------	-----------

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	24.600 cm
Package 1 Width	30.400 cm
Package 1 Length	57.800 cm
Package 1 Weight	5.876 kg
Unit Type Of Package 2	P06
Number Of Units In Package 2	4
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	32.260 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)


Well-being performance

✓	Reach Free Of Svhc	
✓	Toxic Heavy Metal Free	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration	
China Rohs Regulation	China RoHS declaration	

Dimensions Drawings

Dimensions

Right Side and Front View

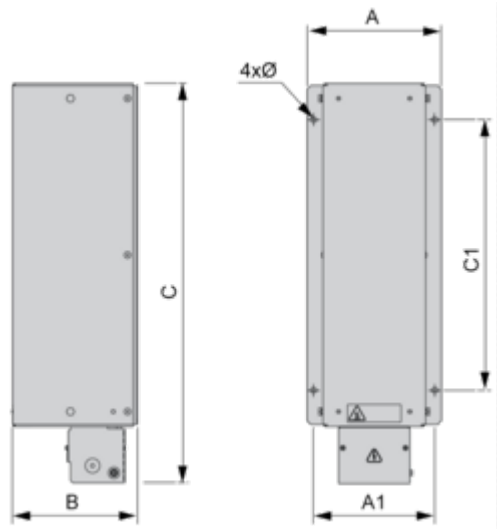

Dimensions in mm

A	B	C	A1	C1	Ø
290	180	570	270	380	6.6 x 9

Dimensions in in.


A	B	C	A1	C1	Ø
11.42	7.09	22.44	10.63	14.96	0.26 x 0.35

Mounting and Clearance

Mounting and Clearance




(1) Braking resistor

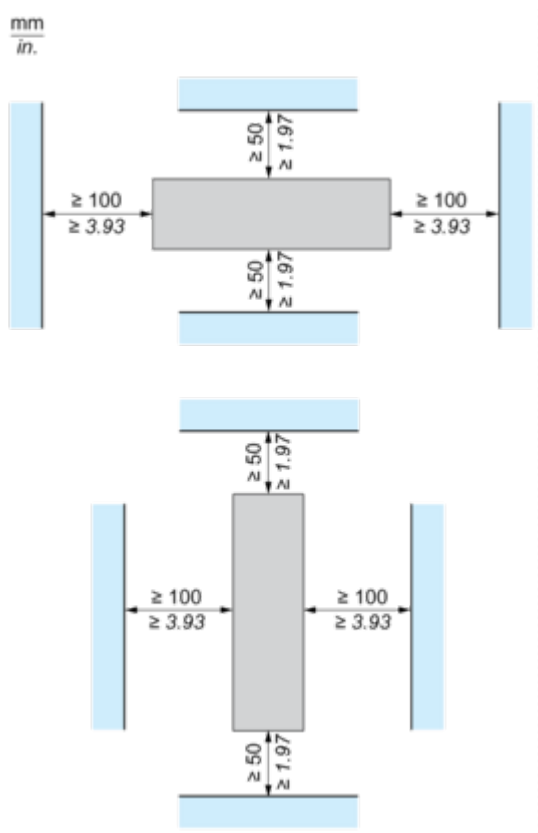

Connections and Schema

Recommended Schema

1 Braking Resistor

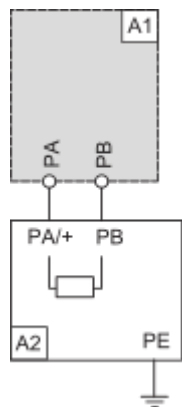


A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC

2 Braking Resistors

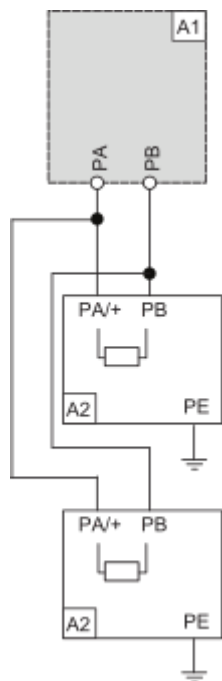

A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC