

Product datasheet

Specifications



braking resistor - 5 ohms - 32 kW - IP23

VW3A7756

Price: 137,222.14 ZAR

Main

Range Compatibility	Altivar Machine ATV340 Altivar Process ATV900
Product Or Component Type	Braking resistor
Ohmic Value	5 Ohm
[Ue] Rated Operational Voltage	24 V DC 250 V AC

Complementary

Product Compatibility	Variable speed drive ATV930 wall mount 75 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 110 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 132 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 160 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 22 kW 200...240 V severe cycle Variable speed drive ATV930 wall mount 30 kW 200...240 V severe cycle Variable speed drive ATV930 wall mount 37 kW 200...240 V severe cycle Variable speed drive ATV930 wall mount 45 kW 200...240 V severe cycle Variable speed drive ATV950 wall mount 75 kW 380...480 V severe cycle Variable speed drive ATV340 55 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 220 kW 380...480 V medium cycle 3 per drive Variable speed drive ATV930 wall mount 250 kW 380...480 V medium cycle 3 per drive Variable speed drive ATV930 wall mount 310 kW 380...480 V medium cycle 4 per drive
Duty Cycle	Severe cycle (heavy duty) <54 s braking with 100 % braking torque for a 120 s cycle Severe cycle (heavy duty) <6 s braking with 165 % braking torque for a 120 s cycle Severe cycle (heavy duty) <6 s braking with 150 % braking torque for a 120 s cycle variable speed drive power = 220 kW Severe cycle (heavy duty) <6 s braking with 150 % braking torque for a 120 s cycle variable speed drive power = 250 kW Severe cycle (heavy duty) <6 s braking with 150 % braking torque for a 120 s cycle variable speed drive power = 315 kW
Average Power Available	32 kW at 50 °C
Electrical Connection	terminal, connection capacity: <= 2.5 mm² / AWG 12 for temperature control switch M12 bar wire for drive
Protection Type	Thermal protection via drive or temperature control switch at 120 °C
Width	540 mm
Height	1285 mm
Depth	1060 mm
Net Weight	126 kg

Environment

Ip Degree Of Protection	IP23
Ambient Air Temperature For Storage	-25...70 °C

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient Air Temperature For Operation	0...50 °C
---------------------------------------	-----------

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	137.0 cm
Package 1 Width	70.0 cm
Package 1 Length	111.0 cm
Package 1 Weight	136.2 kg

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)


Well-being performance

	Reach Free Of Svhc	
	Toxic Heavy Metal Free	
	Mercury Free	
	Rohs Exemption Information	Yes
Reach Regulation		REACH Declaration
Eu Rohs Directive		Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation		China RoHS declaration

Dimensions Drawings

Dimensions

Right Side and Front View

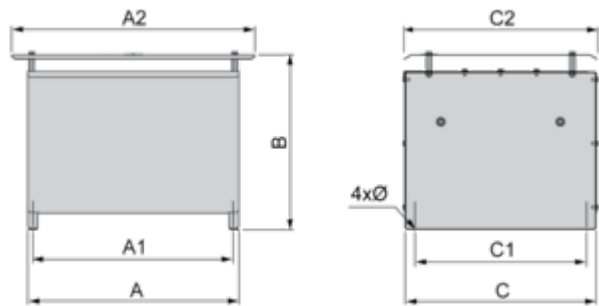

Dimensions in mm


A	B	C	A1	C1	A2	C2	Ø
940	1285	485	920	380	1060	540	9 x 12

Dimensions in in.

A	B	C	A1	C1	A2	C2	Ø
37.00	50.59	19.09	36.22	14.96	41.73	21.26	0.35 x 0.47

Mounting and Clearance


Clearances

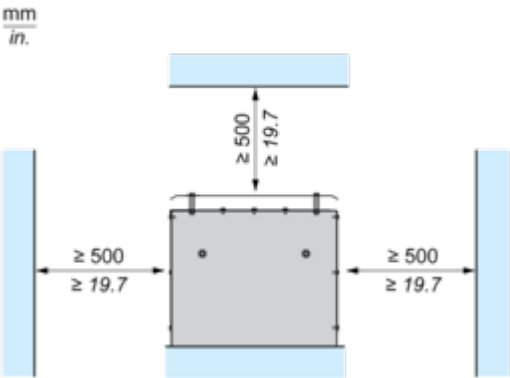

Connections and Schema

Recommended Schema

1 Braking Resistor

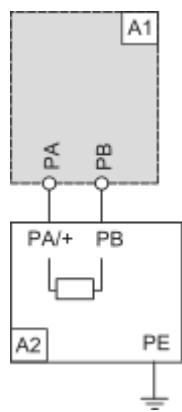


A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC

2 Braking Resistors

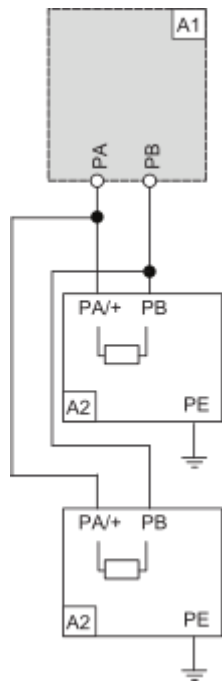

A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC