


# Product datasheet

Specifications



## empty control station - XB2-S - metal - 8 openings in 4 columns

XB2SL42009

**Price: 9,026.38 ZAR**

### Main

|                             |  |
|-----------------------------|--|
| Range Of Product            | Harmony XAP  |
| Product Or Component Type   | Empty control station  |
| Device Short Name           | XB2SL  |
| Product Destination         | For Ø 22 mm control and signalling units                             |
| Product Front Plate Size    | 150 x 150 mm   |
| Usable Depth                | 78 mm  |
| Number Of Cut-Out           | 8 cut-outs   |
| Colour Of Base Of Enclosure | Blue   |
| Colour Of Cover             | Blue   |
| Material                    | Aluminium alloy  |
| Cable Entry                 | 2 holes with blanking plug for cable gland, clamping capacity: 12 mm |
| Product Mounting            | Flush mounting   |
| Ip Degree Of Protection     | IP54 conforming to IEC 60529<br>IP547 conforming to NF C 20-010      |

### Complementary

|                         |         |
|-------------------------|---------|
| Number Of Vertical Rows | 4       |
| Net Weight              | 0.96 kg |

### Environment

|                                       |  |
|---------------------------------------|--|
| Protective Treatment                  | TC   |
| Ambient Air Temperature For Storage   | -40...70 °C  |
| Ambient Air Temperature For Operation | -25...70 °C  |
| Electrical Shock Protection Class     | Class I conforming to IEC 60536<br>Class I conforming to NF C 20-030 |

### Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type Of Package 1       | PCE     |
| Number Of Units In Package 1 | 1       |
| Package 1 Height             | 8.6 cm  |
| Package 1 Width              | 19.2 cm |
| Package 1 Length             | 18.8 cm |
| Package 1 Weight             | 970.0 g |

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

|                                     |          |
|-------------------------------------|----------|
| <b>Unit Type Of Package 2</b>       | S03      |
| <b>Number Of Units In Package 2</b> | 6        |
| <b>Package 2 Height</b>             | 30 cm    |
| <b>Package 2 Width</b>              | 30 cm    |
| <b>Package 2 Length</b>             | 40 cm    |
| <b>Package 2 Weight</b>             | 6.753 kg |
| <b>Package 3 Height</b>             | 30 cm    |

## **Contractual warranty**

|                 |           |
|-----------------|-----------|
| <b>Warranty</b> | 18 months |
|-----------------|-----------|

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

## Well-being performance

✓ Reach Free Of Svhc

---

✓ Toxic Heavy Metal Free

---

✓ Mercury Free

---

✓ Rohs Exemption Information Yes

---

**Reach Regulation** [REACH Declaration](#)

---

**Eu Rohs Directive** Pro-active compliance (Product out of EU RoHS legal scope)  
[EU RoHS Declaration](#)

---

**China Rohs Regulation** [China RoHS declaration](#)

---

**Weee** The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

---


**Circularity Profile** No need of specific recycling operations

---

Dimensions Drawings

Dimensions and Fixing

---

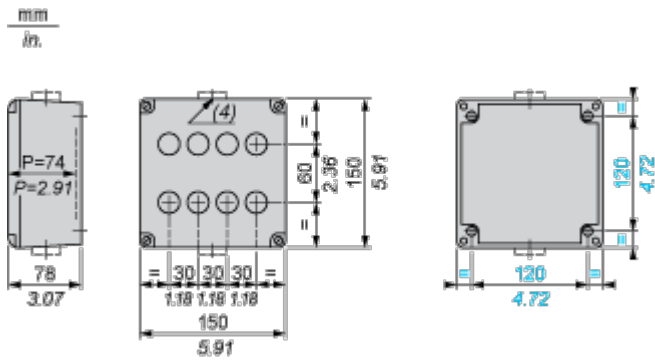

(4) 2 holes, with blanking plug (protrusion 7.5 mm/0.29 in.), for cable glands with 12 mm/0.47 in. maximum clamping capacity.

P Usable depth