

# Product datasheet

Specifications



USB configurable monolithic tower light. Harmony XVGU. Multi color Programmable lights -60 mm. steady/flashing LED buzzer

XVGU3SHAV

Price: 2,403.82 ZAR

## Main

|                                    |                                         |
|------------------------------------|-----------------------------------------|
| Range Of Product                   | Harmony XVGU                            |
| Product Or Component Type          | USB configurable monolithic tower light |
| Beacon Or Indicator Bank Unit Type | 3 illuminated units                     |
| Sound Signalling                   | Buzzer                                  |
| Mounting Diamete                   | 60 mm                                   |
| Component Name                     | XVGU                                    |
| Light Source                       | LED steady or flashing multi-colour     |
| Indicator Bank Base Type           | Base with integrated buzzer             |
| Noise Level                        | 85 dB (2 tone buzzer) at 1 m            |

## Complementary

|                           |                                                                                                       |
|---------------------------|-------------------------------------------------------------------------------------------------------|
| Material                  | PC: globe                                                                                             |
| Device Mounting           | Tube mounting with fixing plate                                                                       |
| Light Block Color         | Clear/clear/clear                                                                                     |
| [Us] Rated Supply Voltage | 5 V DC                                                                                                |
| Connector Type            | USB type A female                                                                                     |
| Current Consumption       | 400 mA                                                                                                |
| Sound Frequency           | 3800 Hz<br>2700 Hz                                                                                    |
| Power Consumption In W    | 2 W                                                                                                   |
| Flashing Frequency        | 2 Hz with flashing LED unit<br>1 Hz with flashing LED unit                                            |
| Product Compatibility     | Vijeo Designer 4.6 indoor use only<br>HMIGTO<br>XBTGT....<br>XBTGK....<br>XBTGC1.<br>XBTGC2.<br>XBTGH |
| Net Weight                | 0.3 kg                                                                                                |

## Environment

|           |                                |
|-----------|--------------------------------|
| Standards | IEC 61000-6-2<br>IEC 61000-6-4 |
|-----------|--------------------------------|

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                                       |                                    |
|---------------------------------------|------------------------------------|
| Product Certifications                | GOST<br>CE<br>UL 508<br>cUL<br>RCM |
| Ambient Air Temperature For Storage   | -35...70 °C                        |
| Ambient Air Temperature For Operation | 0...55 °C                          |
| Electrical Shock Protection Class     | Class I                            |
| Ip Degree Of Protection               | IP54                               |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type Of Package 1       | PCE      |
| Number Of Units In Package 1 | 1        |
| Package 1 Height             | 8.2 cm   |
| Package 1 Width              | 13.0 cm  |
| Package 1 Length             | 41.5 cm  |
| Package 1 Weight             | 450.0 g  |
| Unit Type Of Package 2       | P06      |
| Number Of Units In Package 2 | 35       |
| Package 2 Height             | 80 cm    |
| Package 2 Width              | 80 cm    |
| Package 2 Length             | 60 cm    |
| Package 2 Weight             | 28.75 kg |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

## Well-being performance

✓

Mercury Free

✓

Rohs Exemption Information

Yes


## Certifications & Standards

|                          |                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Reach Regulation         | <a href="#">REACH Declaration</a>                                                                                           |
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope)                                                                  |
| China Rohs Regulation    | <a href="#">China RoHS declaration</a>                                                                                      |
| Environmental Disclosure | <a href="#">Product Environmental Profile</a>                                                                               |
| Weee                     | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile      | No need of specific recycling operations                                                                                    |

Dimensions Drawings


Dimensions

Tube Mounting with Fixing Plate

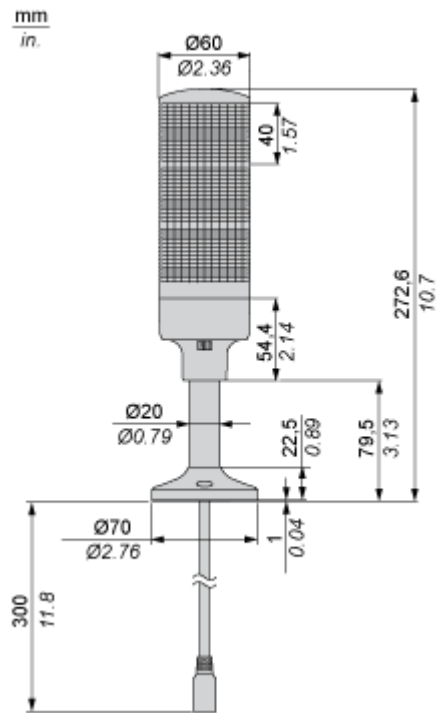

Mounting and Clearance


Mounting on Horizontal Support for Tube Mounting with Fixing Plate

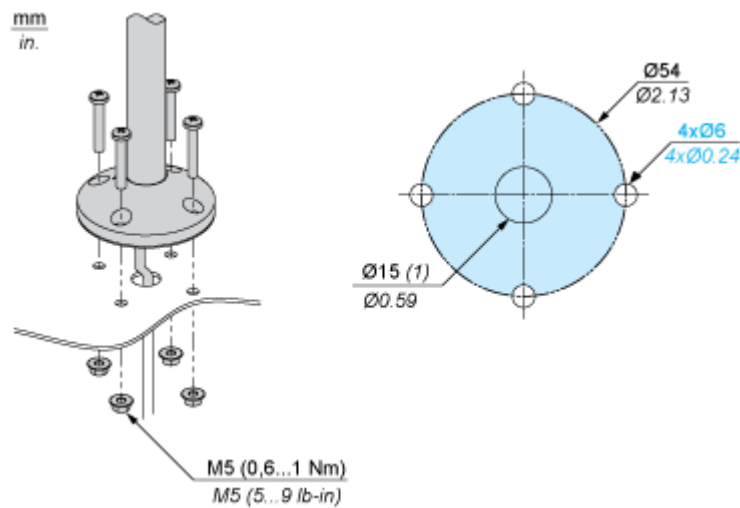

(1) Cable outlet

Mounting Orientation

---

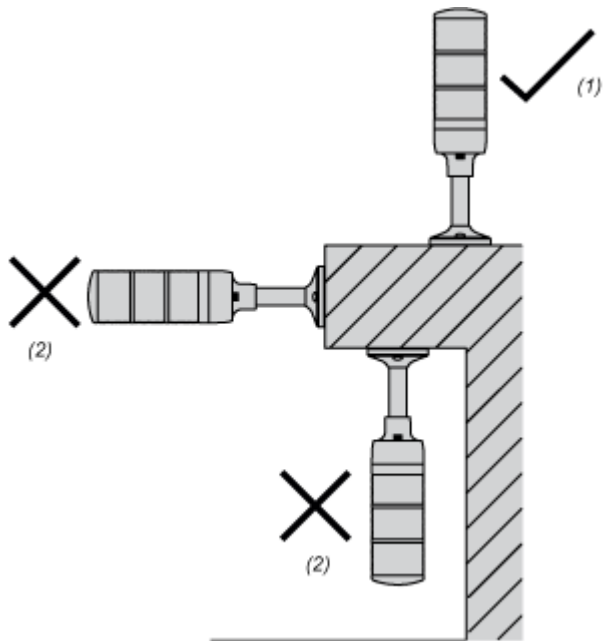

Choose a flat surface with enough strength and with little vibration for installation. Mount this product according to the figure to maintain IP characteristics.

- (1) OK
- (2) NO