

Product datasheet

Specifications



USB configurable monolithic tower light. Harmony XVGU. Multi color Programmable lights -60 mm. steady/flashing LED buzzer

XVGU3SWV

Price: 2,556.18 ZAR

Main

Range Of Product	Harmony XVGU
Product Or Component Type	USB configurable monolithic tower light
Beacon Or Indicator Bank Unit Type	3 illuminated units
Sound Signalling	Buzzer
Mounting Diamete	60 mm
Component Name	XVGU
Light Source	LED steady or flashing multi-colour
Indicator Bank Base Type	Base with integrated buzzer
Noise Level	82 dB (2 tone buzzer) at 1 m

Complementary

Material	PC: globe
Device Mounting	Direct mounting
Light Block Color	Clear/clear/clear
[Us] Rated Supply Voltage	5 V DC
Connector Type	USB type A female
Current Consumption	400 mA
Sound Frequency	2700 Hz 3800 Hz
Power Consumption In W	2 W
Flashing Frequency	2 Hz with flashing LED unit 1 Hz with flashing LED unit
Product Compatibility	Vijeo Designer 4.6 indoor use only HMIGTO XBTGT.... XBTGK.... XBTGC1. XBTGC2. XBTGH
Net Weight	0.3 kg

Environment

Standards	IEC 61000-6-2 IEC 61000-6-4
-----------	--------------------------------

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	GOST cUL CE RCM UL 508
Ambient Air Temperature For Storage	-35...70 °C
Ambient Air Temperature For Operation	0...55 °C
Electrical Shock Protection Class	Class I
Ip Degree Of Protection	IP54

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	7.9 cm
Package 1 Width	7.9 cm
Package 1 Length	31.1 cm
Package 1 Weight	350.0 g
Unit Type Of Package 2	S04
Number Of Units In Package 2	21
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	8.6 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	84
Package 3 Height	80 cm
Package 3 Width	80 cm
Package 3 Length	60 cm
Package 3 Weight	42.908 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓

Mercury Free

✓

Rohs Exemption Information

Yes


Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations

Dimensions Drawings


Dimensions

Direct Base Mounting

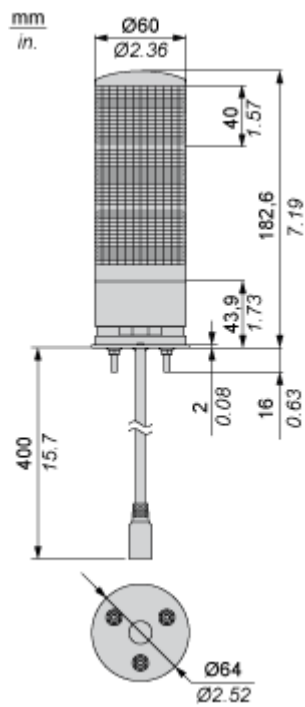


Mounting and Clearance

Mounting on Horizontal Support for Direct Base Mounting

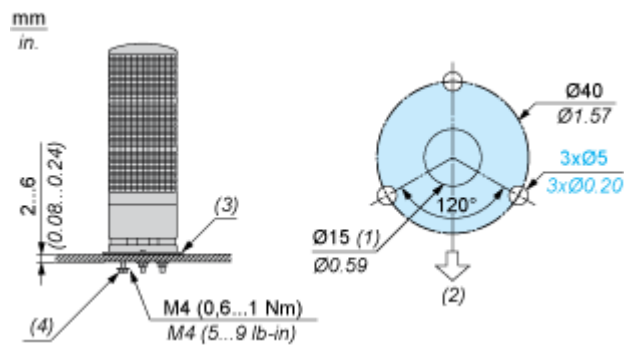

- (1) Cable outlet
- (2) Buzzer opening position
- (3) Waterproof rubber seal
- (4) Hexagon nut with flange

Mounting Orientation

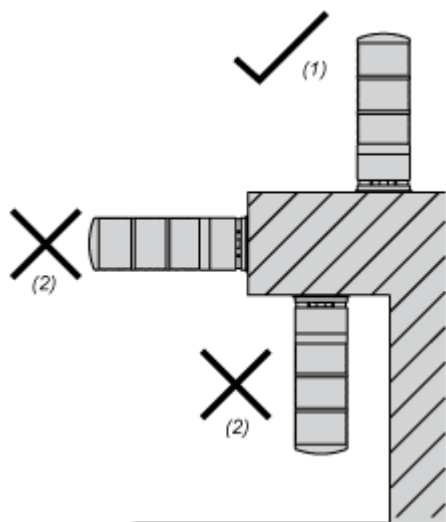

Choose a flat surface with enough strength and with little vibration for installation. Mount this product according to the figure to maintain IP characteristics

- (1) OK
- (2) NO