

CONTACTLESS SAFETY SENSORS

MAGNUS MG S 20

Magnetic Sensor.

Compact and robust thermoplastic enclosure (PBT). 22 mm interaxis fixing holes. IP67 rating



Certifications:



Technical data:

Family	MAGNUS MG
Code	1291000
Connections	M8 4-pole connector
Degree of protection	IP 67
Operating temperature (°C)	From -25 to 75
Dimensions HxWxD (mm)	36 x 26 x 13
Connectable safety controllers	REER Mosaic/MGd1
Tamper protections	-
Contacts	2 N.O. contacts
Switching distance (mm)	3 ... 10
Housing	Thermoplastic enclosure (PBT)

Accessories:


[CABLES C8 G3](#)
[CABLES C8 G93](#)
[CABLES C8 G5](#)
[CABLES C8 G95](#)

Related products:

[MOSAIC M1](#)
[MAGNUS MG d1](#)
[MAGNUS MG S M](#)

See technical drawing in the next page.

Technical drawing:

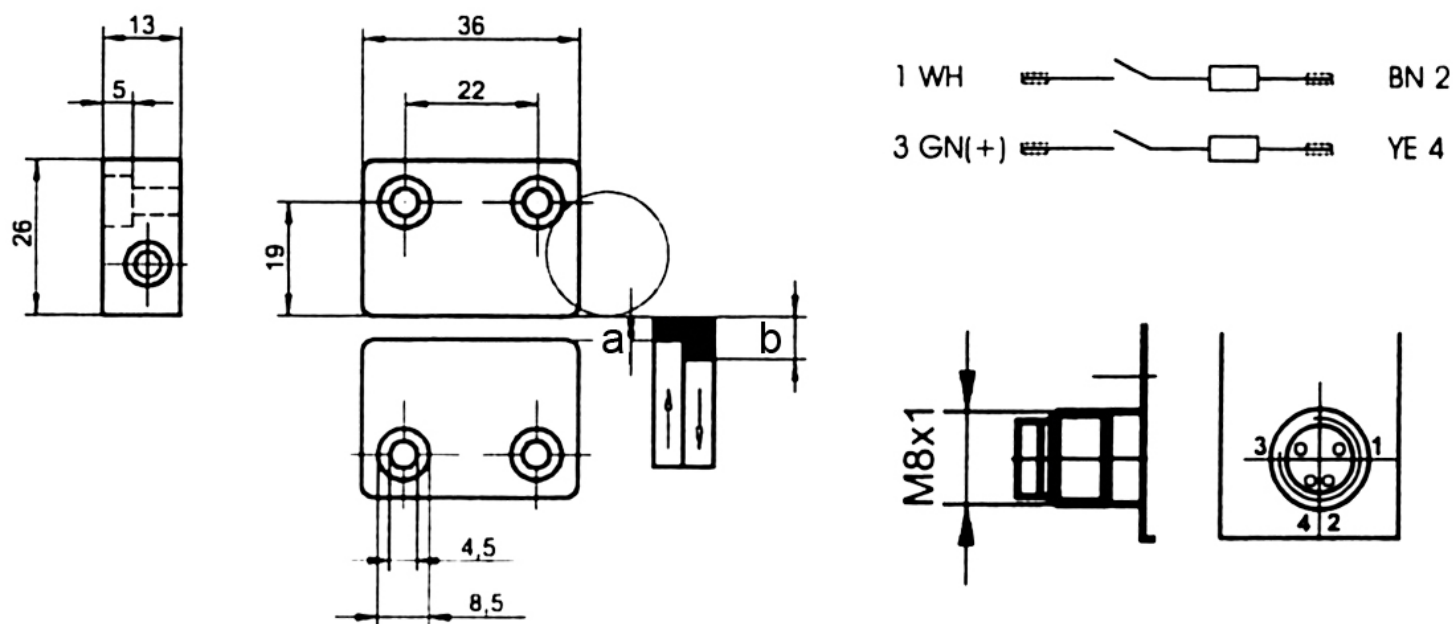

Distanza operativa
Operating distance
Min. 0,5 mm
ON 3 mm (a)
OFF 10 mm (b)