653180484000

Power relay 20 - 30 A

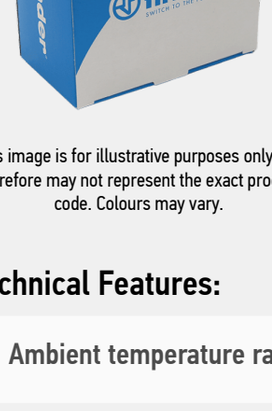

This image is for illustrative purposes only and therefore may not represent the exact product code. Colours may vary.

Technical description:
High Power relay, Faston 250 with flange mount, Number of poles: 1 NO + 1 NC, Contact circuit: 1 NO + 1 NC (SPST-NO + SPST-NC), 20 A, AgSnO2, AC coil, 48 V, operating from 38.4 to 52.8 V, rated power 2.2 VA, resistance 290 Ω, consumption 47 mA, holding voltage 38.4 V, must drop-out voltage 9.6 V, ambient temperature from -40 to +75 °C

BROWSE PRODUCT PAGE

Technical Features:

Ambient temperature range:	-40...75 °C
Commercial Description:	"Power relay with mounting lugs on the back and Faston 250 connections Versions available: Type 65.31: 20 A 1 NO + 1 NC Type 65.31-4300: 30 A 1 NO"
Contact configuration:	1 NO + 1 NC
Dimensions:	32.2x57.2x36.5 mm
Electrical life:	80000 cycles
Insulation coil/contacts:	4 kV
Nominal voltage AC:	48 V
Operating range AC:	38.4...52.8 V
Rated contact voltage:	250 V AC
Rated current (contacts):	20 A
Rated power AC:	2.2 VA
Supply:	AC coil
Certifications and quality approvals (according to type):	

The information, technical details, data and features contained in this document are subject to change or modification at any time.
It is for information purposes only and does not form
the basis of a contract.

Need more information?
Contact our sales Find a dealer

Finder 2025 - All rights reserved
Findernet.com
Technical Information