

Product datasheet

Specifications



Ethernet TCP/IP network module.
Modicon M340 automation
platform. flash memory card.
internal RAM 16 Mb. 1 x RJ45
10/100

BMXNOE0110

Price: 38,768.96 ZAR

Main

Range Of Product	Modicon M340 automation platform
Product Or Component Type	Ethernet TCP/IP network module
Concept	Transparent Ready
Integrated Connection Type	Ethernet TCP/IP RJ45 10/100 Mbit/s 1 twisted pair transparent ready class C30
Protective Treatment	TC

Complementary

Communication Service	Bandwidth management FDR server Rack Viewer SNMP network administrator Global Data I/O scanning Modbus TCP messaging Web server configurable Data Editor (via PC, pocket PC or PDA terminal) SOAP XML Web service (server)
Port Ethernet	10BASE-T/100BASE-TX
Memory Description	Supplied Flash memory card (BMXRWSC016M) Internal RAM 16000 kB
Memory Usage	User web page size: internal RAM Activating the standard web server: supplied Flash memory card (BMXRWSC016M) Application saving: supplied Flash memory card (BMXRWSC016M)
Supply	Internal power supply via rack
Marking	CE
Local Signalling	1 LED (green) for activity on Ethernet network (ETH ACT) 1 LED (green) for processor running (RUN) 1 LED (green) for status of Ethernet network (ETH STS) 1 LED (red) for data rate (ETH 100) 1 LED (red) for memory card fault (CARD ERR) 1 LED (red) for processor or system fault (ERR)
Control Type	RESET push-button cold restart
Current Consumption	90 mA at 24 V DC
Module Format	Standard
Net Weight	0.2 kg

Environment

Ambient Air Temperature For Operation	0...60 °C
---------------------------------------	-----------

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Relative Humidity	10...95 % without condensation
Ip Degree Of Protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.600 cm
Package 1 Width	11.500 cm
Package 1 Length	12.000 cm
Package 1 Weight	238.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.951 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓

Mercury Free

✓

Rohs Exemption Information

Yes


Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings

Modules Mounted on Racks

Dimensions

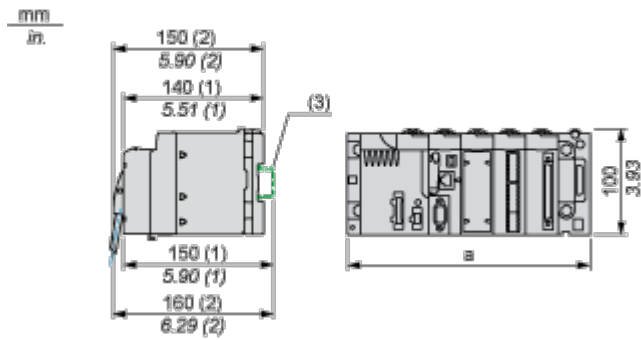

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81