

Product datasheet

Specifications



Harmony. Miniature plug-in relay. 3 A. 4 CO. 12 V DC

RXM4LB1JD

Price: 123.66 ZAR

Main

Range Of Product	Harmony Electromechanical Relays
Coil Interference Suppression	Without
Series Name	Miniature
Product Or Component Type	Plug-in relay
Device Short Name	RXM
Contacts Type And Composition	4 C/O
[Ithe] Conventional Enclosed Thermal Current	3 A at -40...55 °C

Complementary

Contact Operation	Standard
[Uc] Control Circuit Voltage	12 V DC
Status Led	Without
Control Type	Without push-button
[Uimp] Rated Impulse Withstand Voltage	2.5 kV during 1.2/50 µs conforming to IEC 61810-7
[Ie] Rated Operational Current	3 A (AC-1/DC-1) NO conforming to IEC 1.5 A (AC-1/DC-1) NC conforming to IEC
Minimum Switching Capacity	25 mW subject to switching frequency, environment or expected reliability level etc
Operating Time	20 ms between coil de-energisation and making of the Off-delay contact 20 ms between coil energisation and making of the On-delay contact
Cad Overall Width	21 mm
Cad Overall Height	27 mm
Cad Overall Depth	46 mm
Minimum Switching Current	5 mA subject to switching frequency, environment or expected reliability level etc
Minimum Switching Voltage	5 V subject to switching frequency, environment or expected reliability level etc
Rated Operational Voltage Limits	9.6...13.2 V DC
[Ui] Rated Insulation Voltage	250 V conforming to IEC
Maximum Switching Voltage	250 V AC 28 V DC
Drop-Out Voltage Threshold	$\geq 0.1 U_c$ DC
Load Current	3 A at 250 V AC 3 A at 28 V DC
Maximum Switching Capacity	750 VA AC 84 W DC

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Average Resistance	160 Ohm at 23 °C +/- 10 %
Average Coil Consumption	0.9 W, DC
Mechanical Durability	10000000 cycles
Electrical Durability	100000 cycles for resistive load
Safety Reliability Data	B10d = 100000
Operating Rate	<= 1200 cycles/hour under load <= 18000 cycles/hour no-load
Utilisation Coefficient	20 %
Dielectric Strength	2000 V AC between coil and contact with basic insulation 2000 V AC between poles with basic insulation 1000 V AC between contacts with micro disconnection
Protection Category	RT I
Pollution Degree	2
Operating Position	Any position
Test Levels	Level A group mounting
Sale Per Indivisible Quantity	10
Contacts Material	Silver alloy (Ag/Ni)
Net Weight	0.034 kg

Environment

Ip Degree Of Protection	IP40 conforming to IEC 60529
Standards	IEC 61810-1 (iss. 2) CE
Ambient Air Temperature For Storage	-40...85 °C
Vibration Resistance	3 gn, amplitude = +/- 1 mm (f = 10...50 Hz)operating conforming to IEC 60068-2-6 6 gn, amplitude = +/- 1 mm (f = 10...50 Hz)not operating conforming to IEC 60068-2-6
Shock Resistance	30 gn for not operating conforming to IEC 60068-2-27 10 gn for in operation conforming to IEC 60068-2-27

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.100 cm
Package 1 Width	2.100 cm
Package 1 Length	2.800 cm
Package 1 Weight	45.000 g
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	3.200 cm
Package 2 Width	10.300 cm
Package 2 Length	12.700 cm
Package 2 Weight	389.000 g
Unit Type Of Package 3	S02

Number Of Units In Package 3	270
Package 3 Height	15.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	10.897 kg

Contractual warranty

Warranty	18 months
-----------------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee


The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile


[End of Life Information](#)

Dimensions Drawings

Dimensions

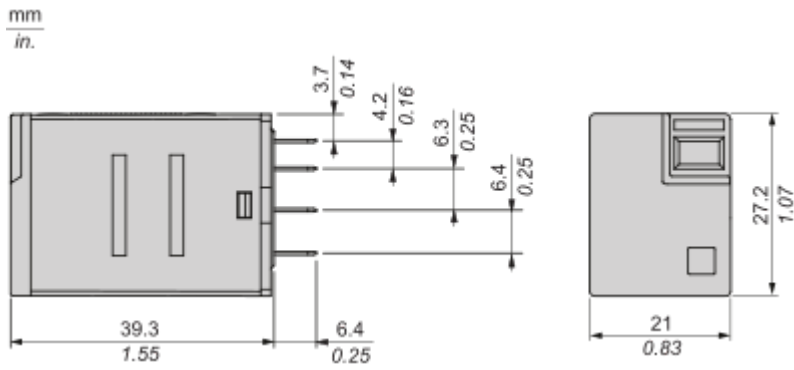

Pin Side View

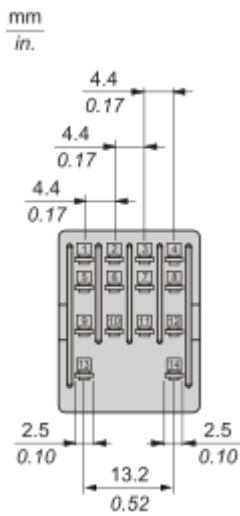

Connections and Schema

Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Performance Curves

Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.

For 4 Poles Relay

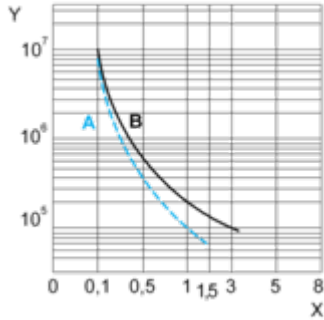

X : Contact current (A)

Y : Durability (Number of operating cycles)

A : Inductive load


B : Resistive load

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

Maximum Switching Capacity

For 4 Poles Relay

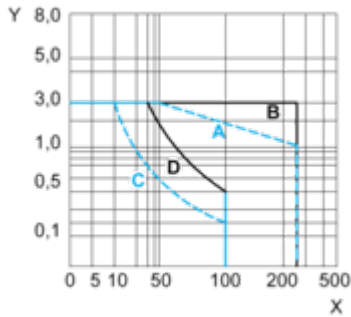

X : Contact voltage (v)

Y : Contact current (A)

A : Inductive AC load

B : Resistive AC load

C : Inductive DC load

D : Resistive DC load

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

For low level loads (below 10mA), we recommend to use RXM*GB series with bifurcated contacts relays instead.