

Product datasheet

Specifications



Harmony. Socket. separate contact. 6/12 A. relay type RXM2/ RXM4. spring clamp terminal

RXZE2S114S

Discontinued on: 23 Jul 2021

To be discontinued

Price: 164.38 ZAR

Main

Range Of Product	Harmony Relay
Device Short Name	RXZ
Product Or Component Type	Socket
Product Compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact
[Ith] Conventional Free Air Thermal Current	12 A 2 C/O relays 6 A 4 C/O relays

Complementary

Shape Of Pin	Flat
[Ue] Rated Operational Voltage	< 250 V AC
Contact Terminal Arrangement	Separate
Connections - Terminals	Spring clamp terminals (push 'n stay), 1 x 0.5...1 x 1.5 mm ² (AWG 20...AWG 16) flexible with cable end Spring clamp terminals (push 'n stay), 1 x 0.5...1 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Fixing Mode	Clip-on (35 mm symmetrical DIN rail)
Sale Per Indivisible Quantity	10
Width	31 mm
Net Weight	0.073 kg

Environment

Ip Degree Of Protection	IP20 conforming to EN/IEC 60529
Dielectric Strength	2500 V
Standards	IEC 61984
Product Certifications	CSA GOST Lloyd's UL
Marking	CE
Ambient Air Temperature For Storage	-40...85 °C
Ambient Air Temperature For Operation	-40...55 °C

Packing Units

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.65 cm
Package 1 Width	3.1 cm
Package 1 Length	9.4 cm
Package 1 Weight	40 g

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance


✓	Reach Free Of Svhc	
✓	Toxic Heavy Metal Free	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes

Certifications & Standards


Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Dimensions Drawings

Socket Only

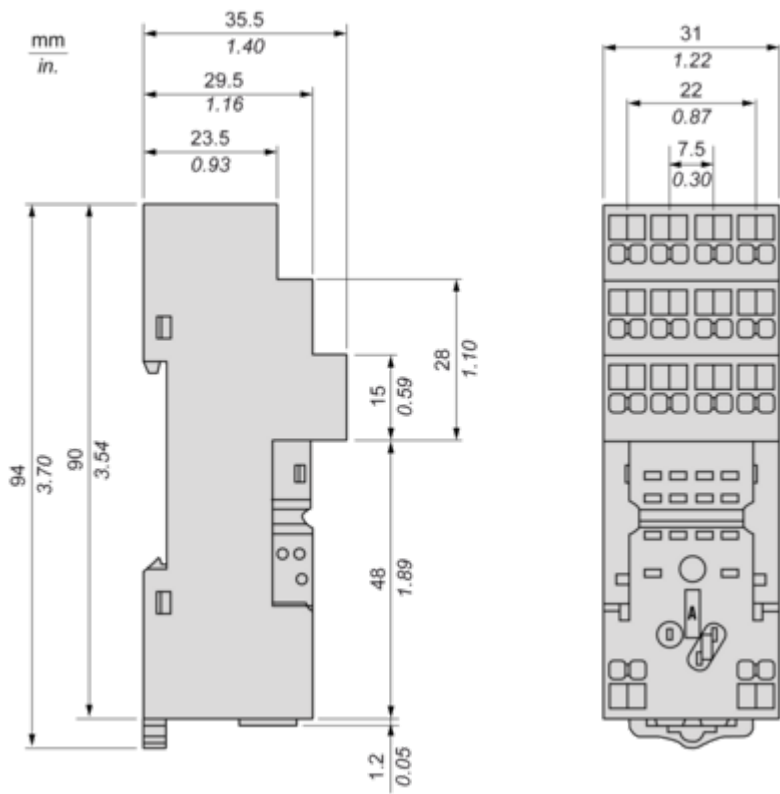


Socket with Relay and Metal Maintaining Clamp

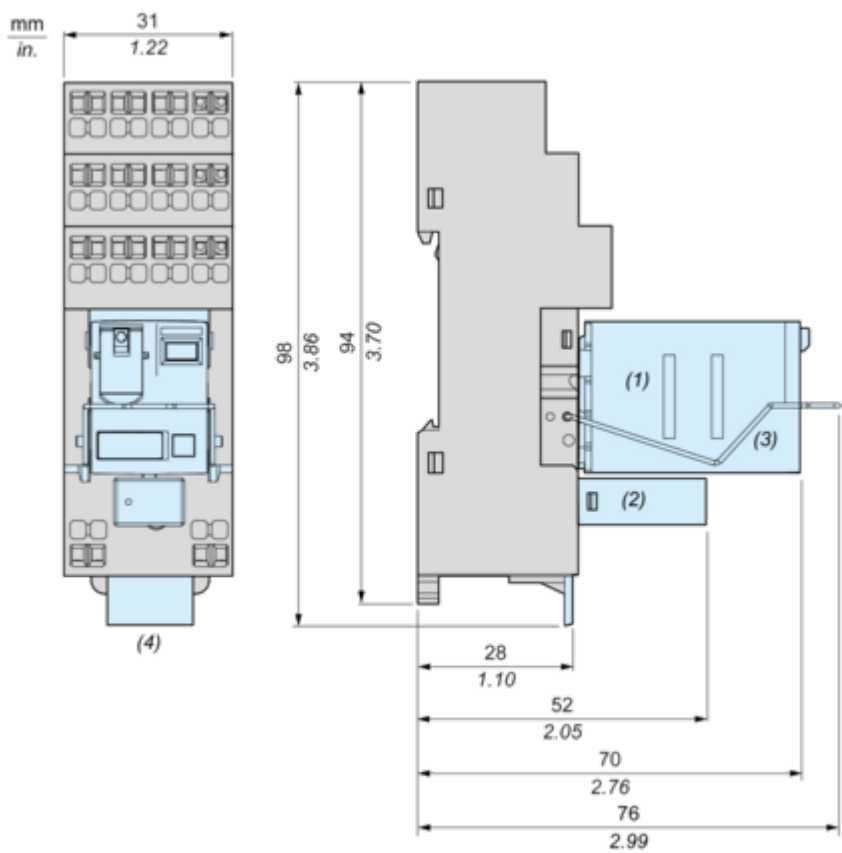

- (1) Relay
- (2) Protection module
- (3) Maintaining clamp
- (4) Legend


Socket with Relay and Plastic Maintaining Clamp

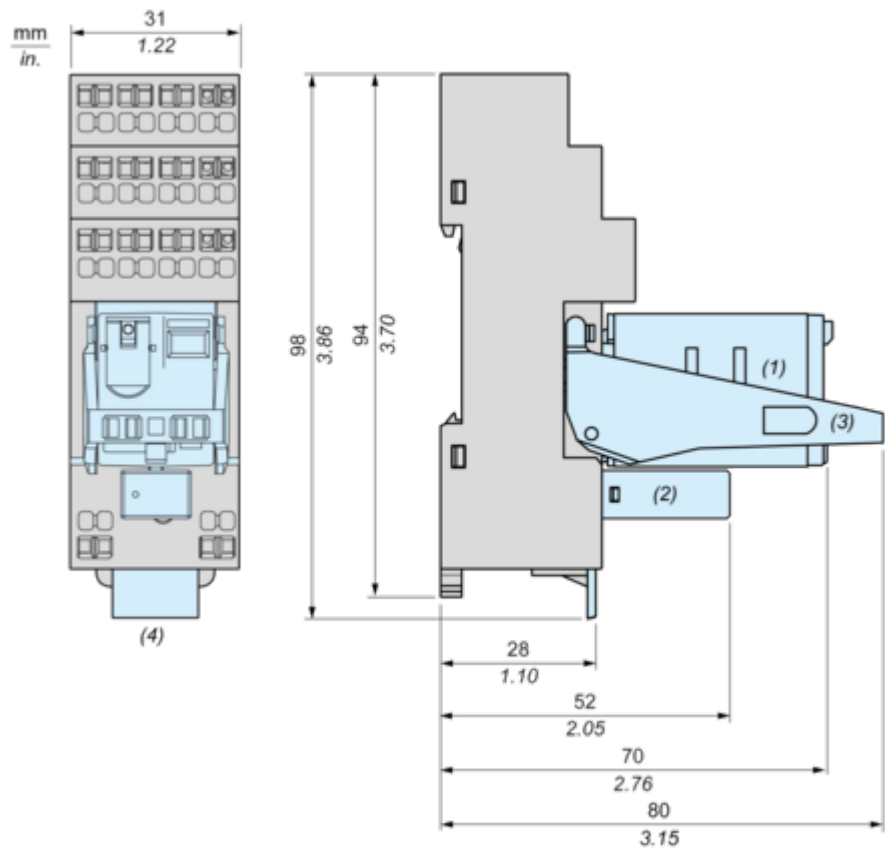

- (1) Relay
- (2) Protection module
- (3) Maintaining clamp
- (4) Legend


Connections and Schema

Wiring Diagram

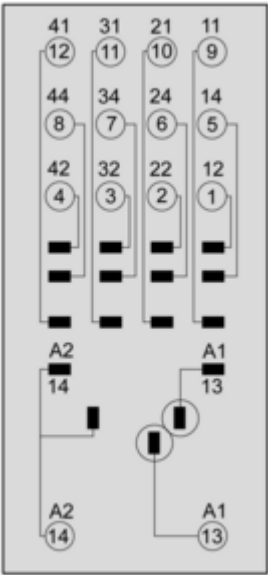


Wiring Recommendations


Exposed Conductor Length



Flat-Blade, Parallel-tip, 2.5 mm diameter

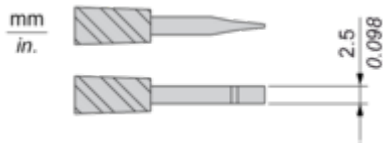


Cable Hole and Tool Hole



- (1) Cable Hole
- (2) Tool Hole

Installation and Uninstallation

Installation : Push In (Insert cable)



Uninstallation : Pull Out (Remove cable)

