

Product datasheet

Specifications



additionnal EMC footprint filter S3 - 3-phase supply - 26 A

VW3A4402

⚠ Discontinued on: 31 Mar 2022

⚠ To be discontinued

Price: 3,666.32 ZAR

Main

Range Of Product	Altivar
Product Or Component Type	EMC input filter
Range Compatibility	Altivar 61 Altivar 71
Product Compatibility	ATV61HU22M3 ATV61HU30M3 ATV61HU30N4 ATV61HU40M3 ATV61HU40N4 ATV71HU22M3 ATV71HU30M3 ATV71HU30N4 ATV71HU40M3 ATV71HU40N4 ATV71PU30N4Z ATV71PU40N4Z ATV71WU30N4 ATV71WU40N4
Product Specific Application	Radio interference input filter
[In] Rated Current	26 A
Thermal Losses	18 W for 200...240 V AC ATV61/ATV71 variable speed drives 6 W for 380...480 V AC ATV61/ATV71 variable speed drives
Network Number Of Phases	Three phase

Complementary

Electrical Connection	Terminal 6 mm² AWG 8
Tightening Torque	1.5 N.m
Maximum Earth Leakage Current	8 mA at 400 V 50 Hz 4.4 mA at 400 V 50 Hz
Power Supply Voltage	200...240 V 380...500 V
Tolerance	10 %
Net Weight	4 kg

Environment

Ip Degree Of Protection	IP20 IP41 (upper part)
Relative Humidity	0...93 % conforming to IEC 68-2-3
Ambient Air Temperature For Operation	-10...50 °C

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient Air Temperature For Storage	-40...65 °C
Operating Altitude	1000...3000 m with current derating 1 % per 100 m
Vibration Resistance	1 gn (f= 13...150 Hz) conforming to IEC 60068-2-6 1.5 mm peak to peak (f= 3...13 Hz) conforming to IEC 60068-2-6
Shock Resistance	15 gn for 11 ms conforming to EN/IEC 60068-2-27
Standards	EN 133200

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	11.000 cm
Package 1 Width	21.500 cm
Package 1 Length	53.500 cm
Package 1 Weight	2.111 kg
Unit Type Of Package 2	P06
Number Of Units In Package 2	8
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	29.888 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product's sustainability >](#)

Well-being performance

✓	Reach Free Of Svhc	
✓	Toxic Heavy Metal Free	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration	
China Rohs Regulation	China RoHS declaration	

Dimensions Drawings

Dimensions

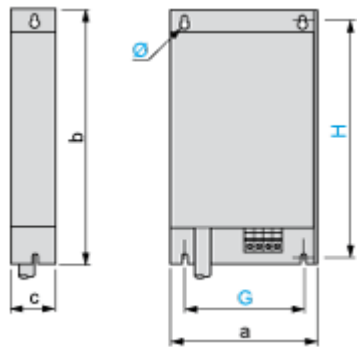

Dimensions in mm

a	b	c	G	H	Ø
155	324	50	130	309	4.5


Dimensions in in.

a	b	c	G	H	Ø
6.10	12.75	1.97	5.12	12.16	0.18

Mounting and Clearance

Mounting Recommendations

Mounting the Filter Under the Drive

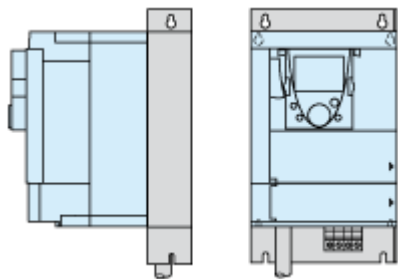

Mounting the Filter Next to the Drive

