

Product datasheet

Specifications



VW3A7703 - Braking resistor - IP 20 - 28 Ohm - 200 W

VW3A7703

Price: 8,364.66 ZAR

Main

Range Of Product	Altivar
Range Compatibility	Altivar 61 Altivar 312 Altivar 32 Altivar 312 Solar Altivar 31C
Product Compatibility	ATV312HD11N4 ATV312HD11S6 ATV312HD15N4 ATV312HD15S6 ATV312HU40M3 ATV31CD11N4 ATV31CD15N4 ATV32HD11N4 ATV32HD15N4 ATV61HD18Y ATV61HD22Y ATV61HU30M3 ATV61HU40M3 ATV61WD15N4 ATV61WD15N4C ATV61WD18N4 ATV61WD18N4C ATV71HD11N4 ATV71HD15N4 ATV71HD15Y ATV71HD18Y ATV71HU30M3 ATV71HU40M3 ATV71PD11N4Z ATV71WD11N4 ATV71WD15N4 Variable speed drive ATV310 at 11 kW
Ohmic Value	28 Ohm
[Ue] Rated Operational Voltage	24 V DC at 0.1 A 250 V AC at 1 A

Complementary

Average Power Available	200 W at 50 °C 231 W at 40 °C
Electrical Connection	terminal, connection capacity: $\leq 1.5 \text{ mm}^2$ / AWG 16 for temperature control switch terminal, connection capacity: $\leq 4 \text{ mm}^2$ / AWG 28 for drive
Temperature Controlled Switch Contact Resistance	60 μOhm
Protection Type	Thermal protection via drive or temperature control switch at 120 °C
Width	140 mm
Height	393 mm
Depth	120 mm

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Net Weight	3.5 kg
------------	--------

Environment

Ip Degree Of Protection	IP20
-------------------------	------

Ambient Air Temperature For Storage	-25...70 °C
-------------------------------------	-------------

Ambient Air Temperature For Operation	0...50 °C
---------------------------------------	-----------

Packing Units

Unit Type Of Package 1	PCE
------------------------	-----

Number Of Units In Package 1	1
------------------------------	---

Package 1 Height	21.800 cm
------------------	-----------

Package 1 Width	25.800 cm
-----------------	-----------

Package 1 Length	50.000 cm
------------------	-----------

Package 1 Weight	3.882 kg
------------------	----------

Unit Type Of Package 2	S06
------------------------	-----

Number Of Units In Package 2	6
------------------------------	---

Package 2 Height	75.000 cm
------------------	-----------

Package 2 Width	60.000 cm
-----------------	-----------

Package 2 Length	80.000 cm
------------------	-----------

Package 2 Weight	35.920 kg
------------------	-----------

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)


Reach Regulation [REACH Declaration](#)

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)
[EU RoHS Declaration](#)

China Rohs Regulation [China RoHS declaration](#)

Dimensions Drawings

Dimensions

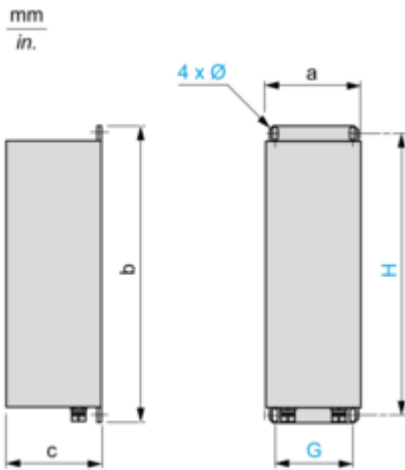

Dimensions in mm

a	b	c	G	H	Ø
140	393	120	120	375	6 x 12

Dimensions in in.

a	b	c	G	H	Ø
5.51	15.47	4.72	4.72	14.76	0.24 X 0.47

Mounting and Clearance

Clearance

