

Product datasheet

Specifications



Harmony XB5. Complete buzzer.
plastic. Ø22. continuous or
intermittent tone. 24 V AC/DC

XB5KSB

Price: 2,703.42 ZAR

Main

Range Of Product	Harmony XB5
Product Or Component Type	Annunciator
Bezel Material	Dark grey plastic
Mounting Diamete	22 mm
Head Type	Standard
Cap/Operator Or Lens Colour	Black

Complementary

Supply Circuit Type	AC/DC
Supply Frequency	50/60 Hz
Signalling Type	Continuous or intermittent tone
Noise Level	90 dB 6.8 kHz 0.1 m +/- 10 %
Resistance To High Pressure Washer	9000000 Pa at 80 °C, distance : 0.1 m
Height	29 mm
Width	29 mm
Depth	55 mm
Net Weight	0.024 kg
Current Consumption	<= 28 mA
[Us] Rated Supply Voltage	24 V +/- 10 %

Environment

Protective Treatment	TH
Ambient Air Temperature For Storage	-40...70 °C
Ambient Air Temperature For Operation	-40...70 °C
Overvoltage Category	Class II conforming to IEC 60536
Electrical Shock Protection Class	Class II conforming to IEC 60536
Nema Degree Of Protection	NEMA 4X NEMA 13

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	IEC 60947-5-1
	IEC 60947-1
	IEC 60947-5-1
	IEC 60947-5-4
	CSA C22.2 No 14
	IEC 60947-5-4
	IEC 60947-1
	UL 508
	JIS C8201-5-1
	JIS C8201-1
	IEC 60529
	IEC 62262
	IEC 50102
Product Certifications	UL listed
	CSA
	BV

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.800 cm
Package 1 Width	3.000 cm
Package 1 Length	5.400 cm
Package 1 Weight	28 g
Unit Type Of Package 2	S01
Number Of Units In Package 2	88
Package 2 Height	15.000 cm
Package 2 Width	15.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	2.696 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓

Mercury Free

✓

Rohs Exemption Information


Yes

Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations

Dimensions Drawings

Dimensions

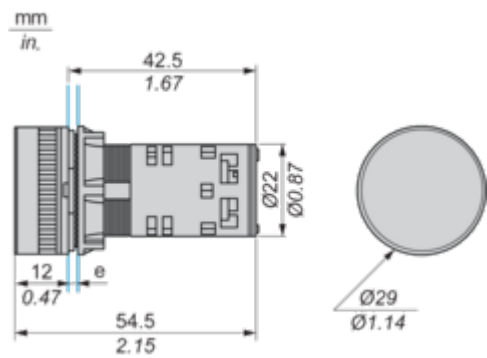


e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Panel Cut-out for Buzzer

Connection by Screw Clamp Terminals

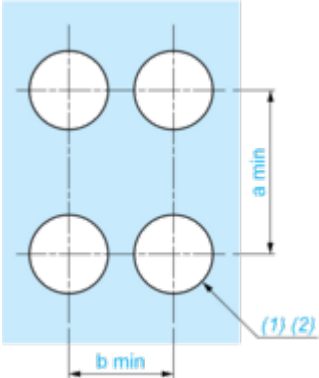


- (1) Diameter on finished panel or support
- (2) Ø22.5 mm recommended ($\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in. } \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18

Connections and Schema

Cabling of Annunciators

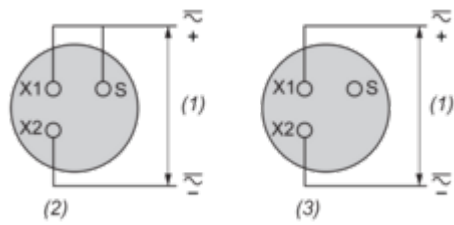

- (1) Supply
- (2) Intermittent
- (3) Continuous