

Product datasheet

Specifications



Illuminated monolithic push button.
Harmony XB6E. rectangle yellow
illumin pushbutton Ø 16 flush
pushtorelease 24 VDCpolarised
1CO

XB6EDF5B1P

⚠ Discontinued

⚠ Discontinued on: 15 Jun 2023

Main

Range Of Product	Harmony XB6E
Product Or Component Type	Illuminated monolithic push-button
Device Short Name	XB6E
Bezel Material	Plastic
Mounting Diamete	16 mm
Sale Per Indivisible Quantity	5
Shape Of Signaling Unit Head	Rectangular
Type Of Operator	latching
Operator Profile	Yellow flush
Contacts Type And Composition	1 C/O
Contact Operation	Snap action
Connections - Terminals	Faston connectors, connection size: 2.8 x 0.5 mm Soldered connectors
Contacts Material	Gold-flashed silver
Light Source	Integral LED
[Us] Rated Supply Voltage	24 V DC polarised

Complementary

Height	18 mm
Width	24 mm
Depth	40 mm
Terminals Description Iso N°1	(13-14-11-12)OF
Net Weight	0.006 kg
Overvoltage Category	II conforming to IEC 60536
Operating Position	Any position
Marking	CE
Operating Force	1.3 N C/O changing electrical state
Mechanical Durability	250000 cycles
Short-Circuit Protection	3 A cartridge fuse type gG

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Ith] Conventional Free Air Thermal Current	3 A
[Uij] Rated Insulation Voltage	250 V (pollution degree 2) conforming to IEC 60947-1
[Uimp] Rated Impulse Withstand Voltage	2.5 kV conforming to IEC 60947-1
Electrical Durability	50000 cycles, DC-12, 1 A at 30 V conforming to IEC 60947-5-1 appendix C 50000 cycles, AC-12, 0.5 A at 125 V conforming to IEC 60947-5-1 appendix C 50000 cycles, AC-12, 0.5 A at 250 V conforming to IEC 60947-5-1 appendix C
Electrical Reliability	$\Lambda = 10\exp(-8)$ at 5 V and 1 mA with confidence level of 90 % conforming to IEC 60947-5-4
Signalling Type	Steady
Current Consumption	10 mA
Service Life	50000 h

Environment

Ambient Air Temperature For Storage	-40...70 °C
Ambient Air Temperature For Operation	-10...55 °C
Ip Degree Of Protection	IP65 conforming to IEC 60529
Standards	CSA C22.2 No 14 JIS C 852 IEC 60947-5-1 UL 508 JIS C 4520 IEC 60947-1
Product Certifications	CCC cURus
Vibration Resistance	1 mm (f= 5...55 Hz) conforming to IEC 60068-2-6 9 gn (f= 5...55 Hz) conforming to IEC 60068-2-6
Shock Resistance	20 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27
Electromagnetic Compatibility	Electrostatic discharge immunity test - test level: 8 kV conforming to IEC 61000-4-2

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.8 cm
Package 1 Width	7.3 cm
Package 1 Length	18.5 cm
Package 1 Weight	10.0 g
Unit Type Of Package 2	BAG
Number Of Units In Package 2	5
Package 2 Height	2.8 cm
Package 2 Width	7.3 cm
Package 2 Length	18.5 cm
Package 2 Weight	52.0 g
Unit Type Of Package 3	S01
Number Of Units In Package 3	50
Package 3 Height	15.0 cm

Package 3 Width	15.0 cm
Package 3 Length	40.0 cm
Package 3 Weight	745.0 g

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability




Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)


Well-being performance

 Reach Free Of Svhc	
 Mercury Free	
 Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Pushbutton

Rectangular Head

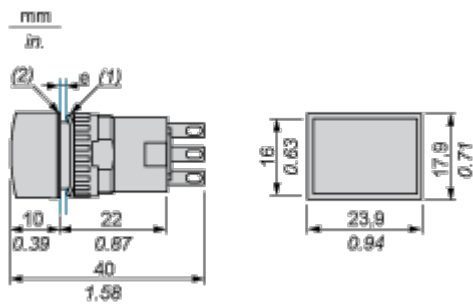

- (1) Anti-rotation plate (thickness: 0.6 mm / 0.02 in.)
- (2) Seal (thickness: 0.5 mm / 0.01 in.)
- e panel thickness: 0.5 mm (0.01 in.) ≤ e ≤ 6 mm (0.24 in.)

Mounting and Clearance

Panel Cut-Out and Mounting

Rectangular Head

