

Product datasheet

Specifications



Complete beacon. Harmony XVB
Universal. Ø 70 mm tower light.
flashing. clear. IP65. 120 V

XVBL1G7

⚠ Discontinued on: 08 Jan 2021

⚠ Discontinued

Main

Range Of Product	Harmony XVB Universal
Product Or Component Type	Complete beacon
Beacon Or Indicator Bank Unit Type	Base unit direct or tube fixing Illuminated unit
Signalling Type	Flashing
Mounting Diamete	70 mm
Component Name	XVBL
Material	Glass reinforced polyamide: base unit Polycarbonate: illuminated unit
Light Source	Integral LED, clear
Bulb Type	Protected LED
[Us] Rated Supply Voltage	120 V AC

Complementary

Connections - Terminals	Screw clamp terminals, <= 1 x 1.5 mm² with cable end
[Ui] Rated Insulation Voltage	250 V conforming to IEC 60947-1
Nominal Voltage Limit	0.85...1.1 Un conforming to IEC 60947-5-1
Current Consumption	< 17 mA AC
[Uimp] Rated Impulse Withstand Voltage	4 kV conforming to IEC 60947-1
Flashing Frequency	1 Hz
Cad Overall Width	70 mm
Cad Overall Height	139 mm
Cad Overall Depth	70 mm
Terminals Description Iso N°1	(GND)GROUND (COM-1)PW
Net Weight	0.28 kg

Environment

Pollution Degree	2
Product Certifications	CCC EAC CSA C22-2 No 14 UL 508

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	EN/IEC 60947-5-1
Protective Treatment	TC
Ambient Air Temperature For Storage	-40...70 °C
Electrical Shock Protection Class	Class I on support tube conforming to IEC 61140 Class II on base unit conforming to IEC 61140
Ip Degree Of Protection	IP65 on fixing base XVBZ0. conforming to IEC 60529 IP66 on base unit conforming to IEC 60529
Nema Degree Of Protection	Type 4X conforming to UL (indoor)


Contractual warranty

Warranty	18 months
----------	-----------

Dimensions Drawings

Illuminated Beacon for BA 15d Bulb or LED

Dimensions

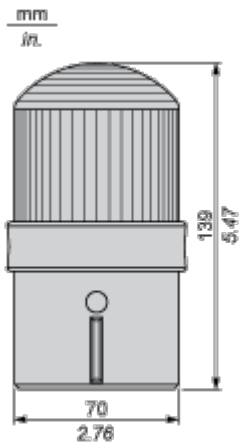

Connections and Schema

Illuminated Beacon

Wiring Diagram

